


雄  真
XIONGZHEN

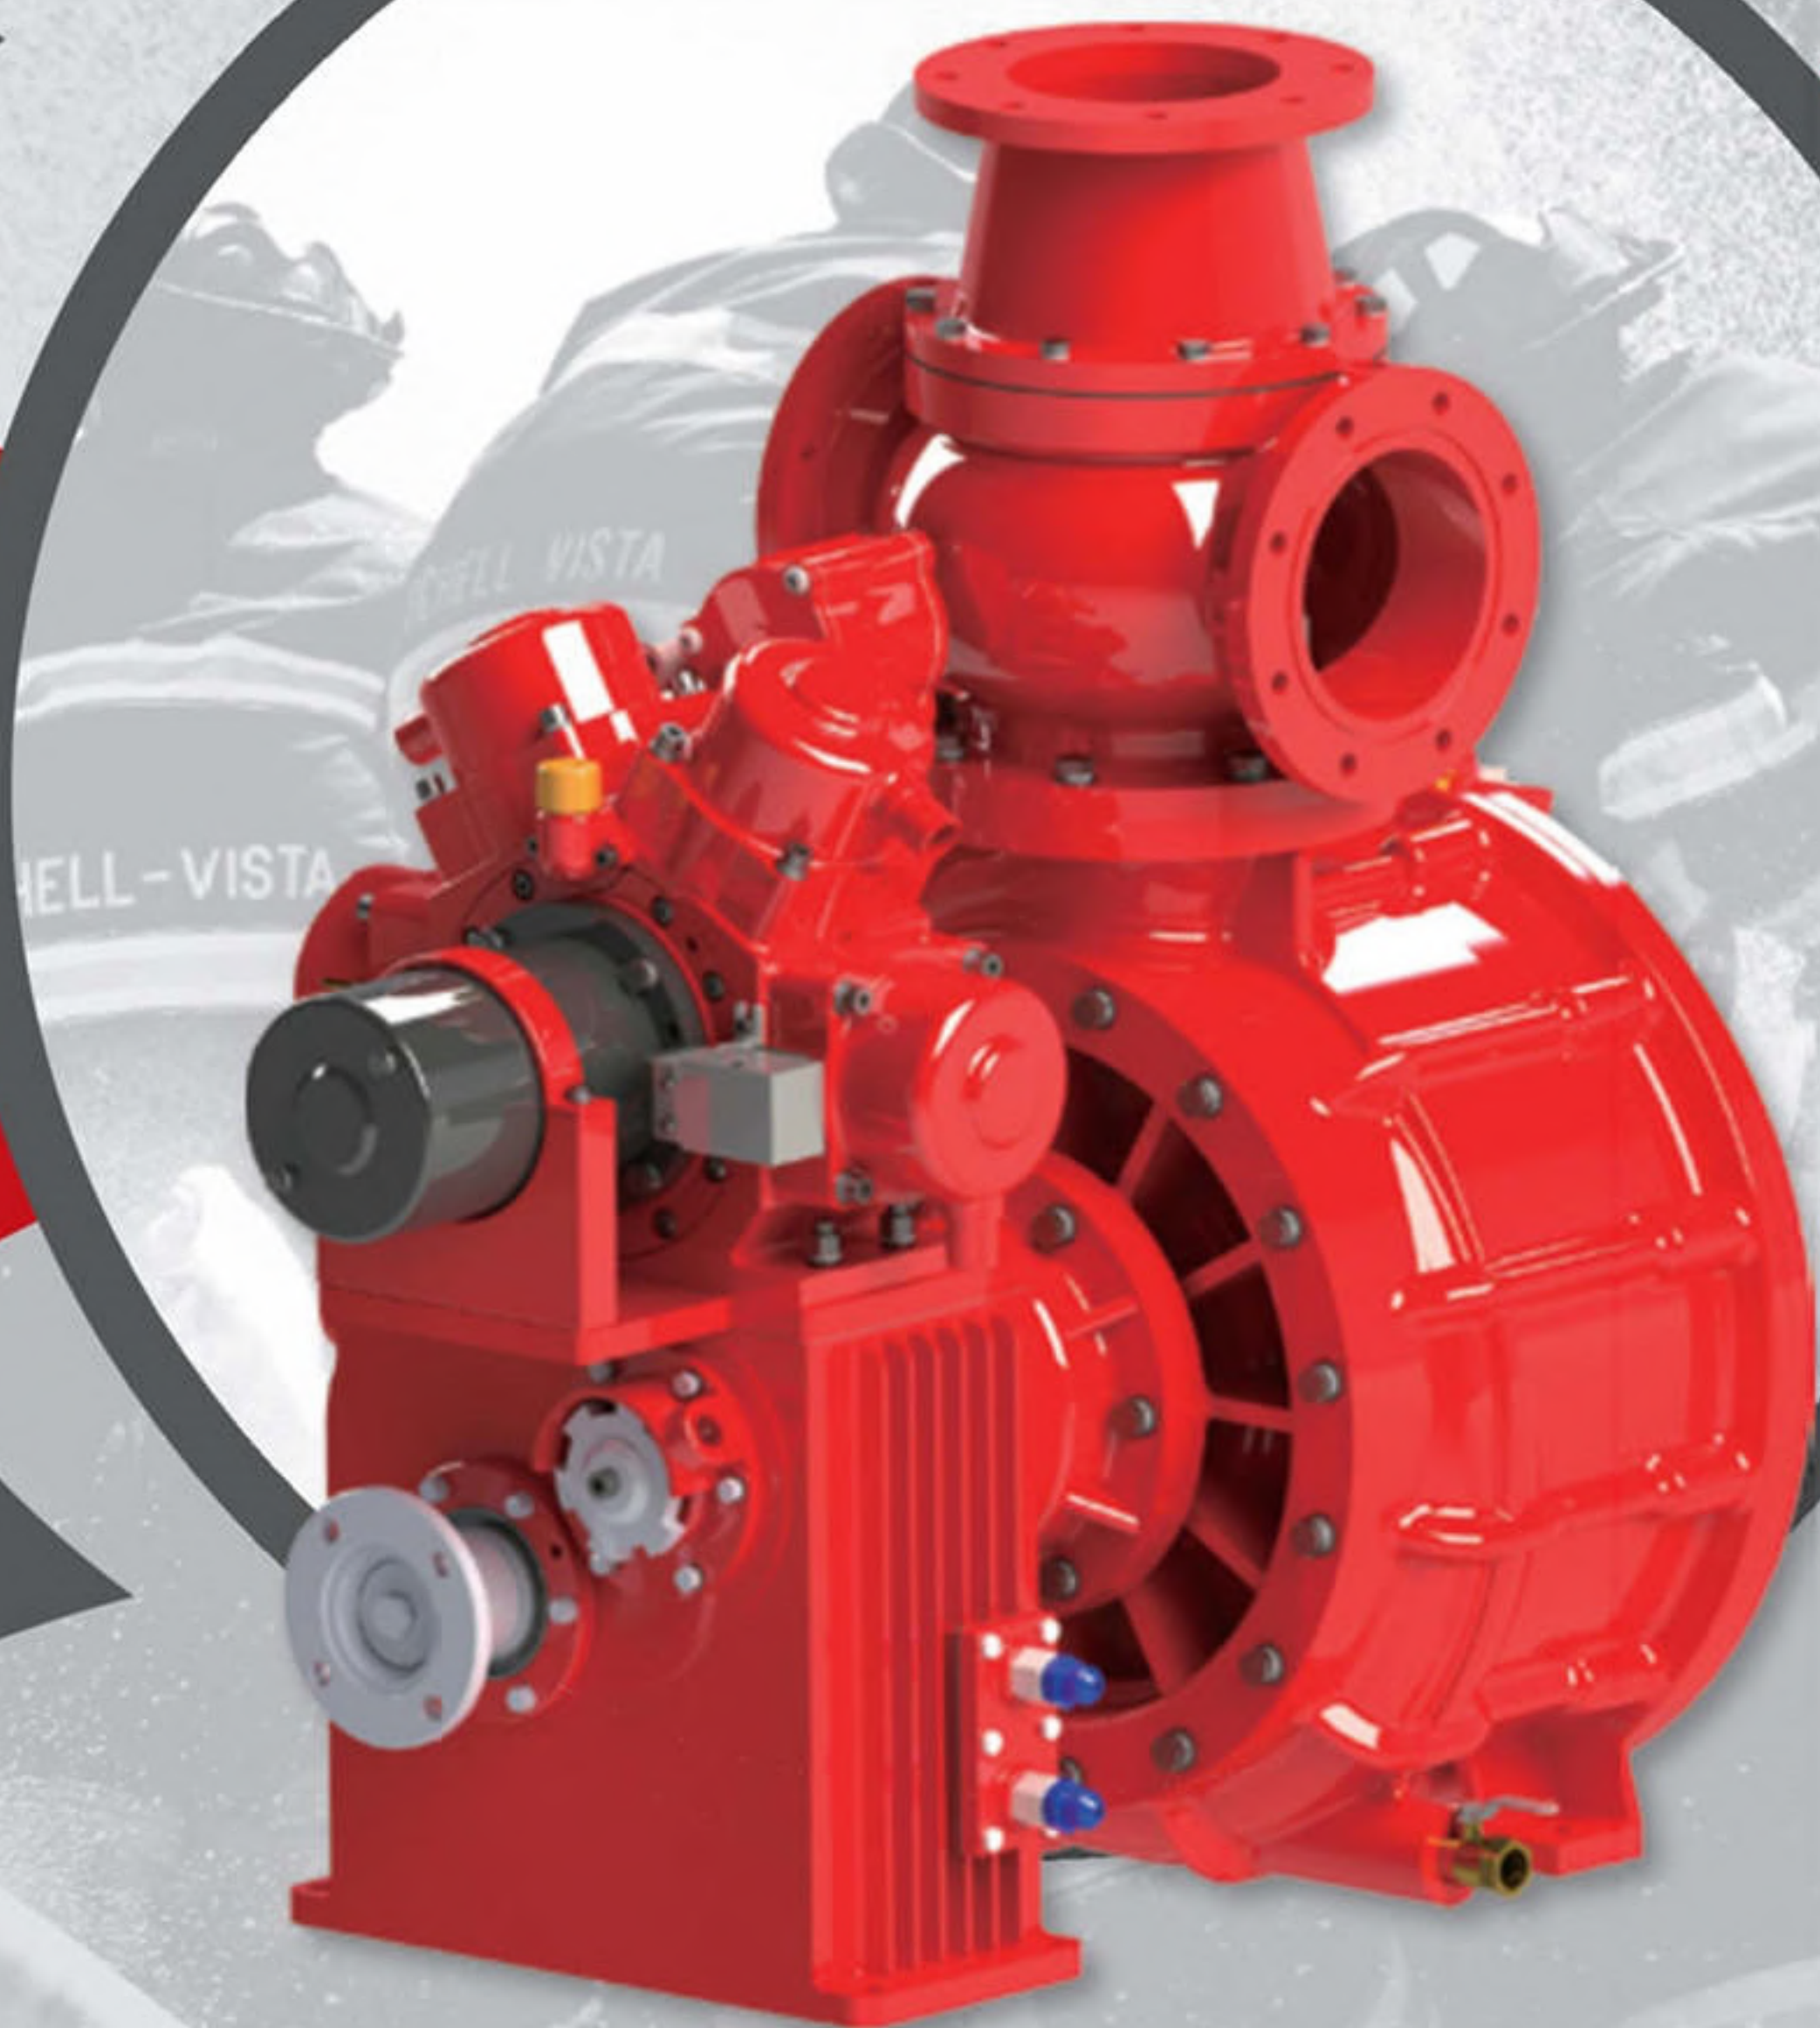

AUTOMOTIVE LOW PRESSURE
MEDIUM-AND-LOW PRESSURE / HIGH-
AND-LOW PRESSURE SERIES


车用低压 / 中低压 / 高低压系列

FIRE PUMPS 消防泵

PRODUCT CATALOGUE

产品目录

车用消防泵 Vehicle fire pump	06
CB10/20-XZ	06
CB10/20-XZ	09
CB10/30-XZ	10
CB10/40-XZ	13
CB10/60-XZ	16
CB10/80-XZ	19
CB16/60-XZ	22
CB10/100-XZ	25
CB20-10/15-30-XZ	27
CB20-10/20-40-XZ	29
CB20-10/30-60-XZ	31
CB20-10/40-80-XZ	33
CB40-10/7-50-XZ	36
CB20/15-XZ	38
CB20/20-XZ	40
CB20/30-XZ	42
车用水泵 Vehicle pump	44
两活塞引水器 Two-piston water diverter	46
四活塞引水器 Four-piston water diverter	47
PH100泡沫比例混合器 PH100 foam proportioner	48
不锈钢球阀 Stainless steel ball valve	49
消防炮 Fire-fighting cannon	50
消防水枪 Fire hose	50
配件 Accessories	51
方法兰球阀 Square flanged ball valve	52
出水球阀 Discharge ball valve	53

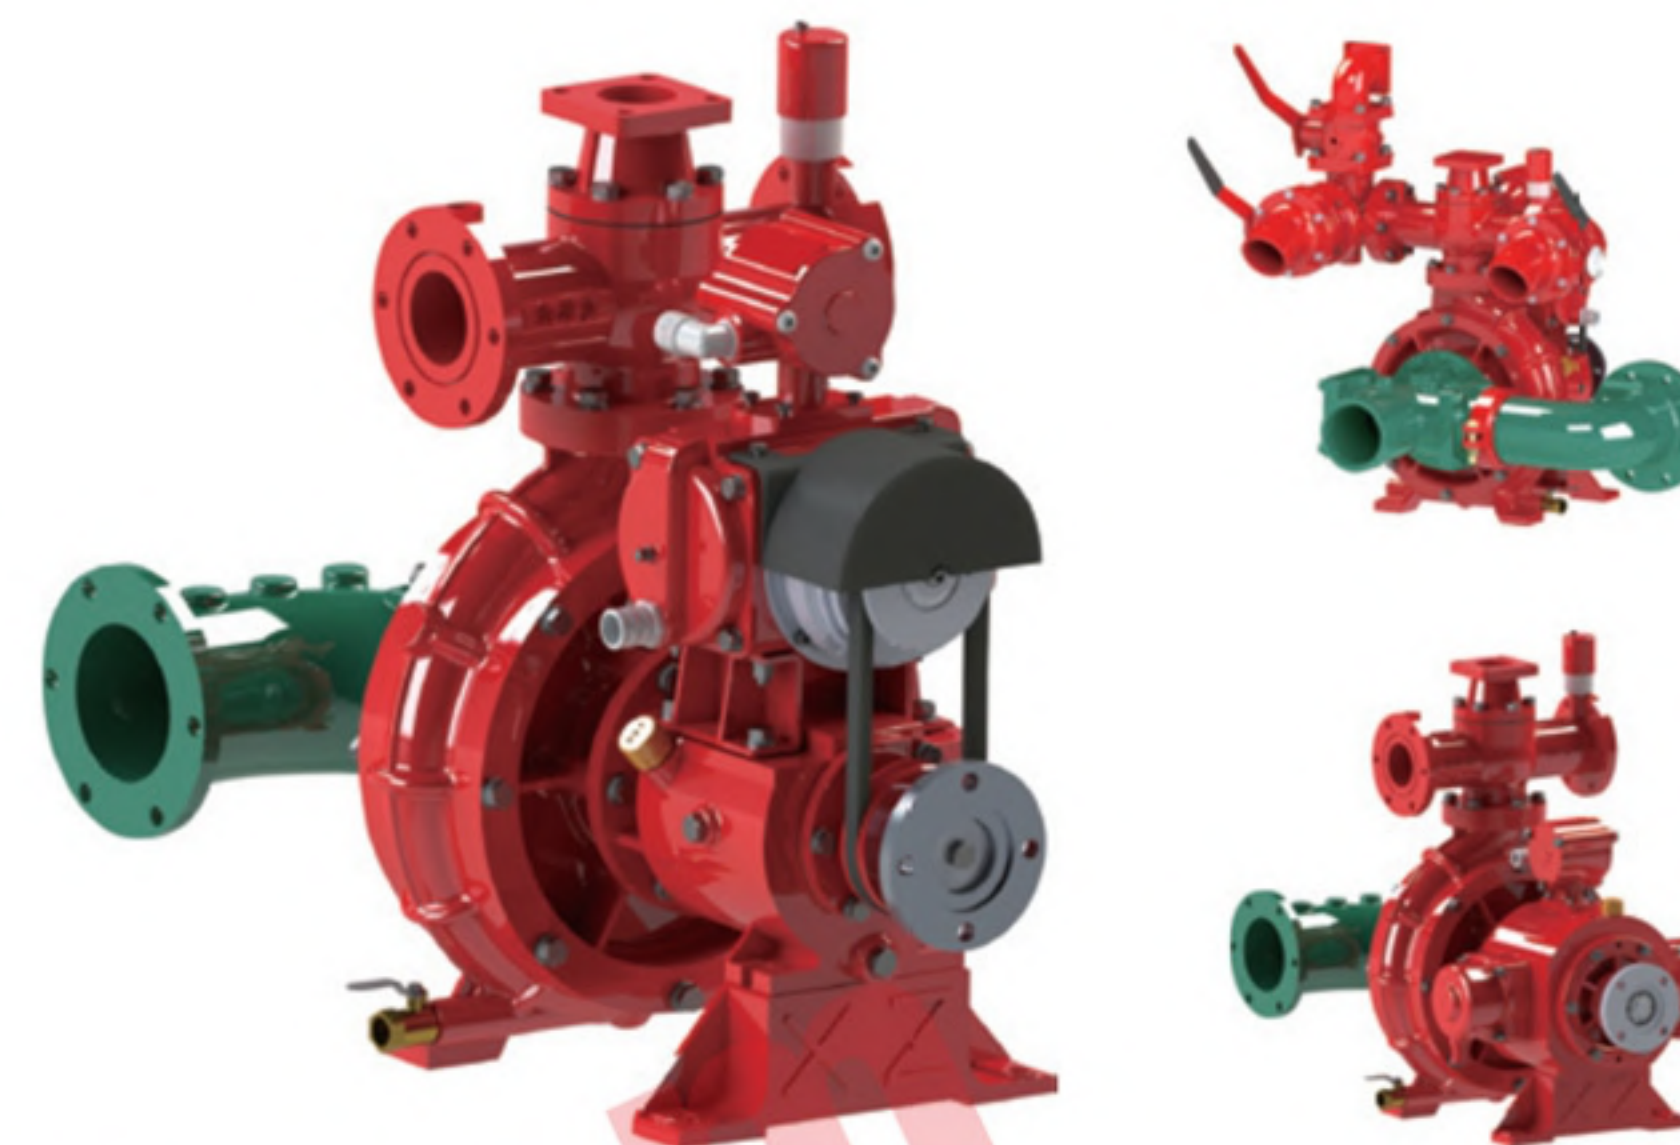

CB10/20-XZ

车用消防泵 / Vehicle fire pump

CB10/20-XZ低压车用消防泵结构采用单级离心水泵，水泵壳体由高强度铝合金制造。采用两活塞引水装置，泵转动时带动引水泵，满足压力后引水泵自动脱离。产品具有运行稳定，操作方便，性能可靠的特点。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.069、1.143、1.222、1.307、1.4、1.5。

The CB10/20-XZ low-pressure vehicle fire pump contains a single-stage centrifugal water pump, where the pump housing is made of high-strength aluminum alloy. A two-piston diverter device is adopted, and the diverter is driven when the pump rotates, which will be automatically disengaged when the necessary pressure is achieved. The product has the characteristics of stable operation, convenient operation and reliable performance. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.069, 1.143, 1.222, 1.307, 1.4, 1.5.




产品性能参数 /PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	20	1.00	3135±50	34	3
2	14	1.30	3440±50	35	3
3	10	1.00	3059±50	22	7


CB10/20-XZ 安装尺寸图

CB10/20-XZ Installation Dimension Drawing


样式一 / Style one

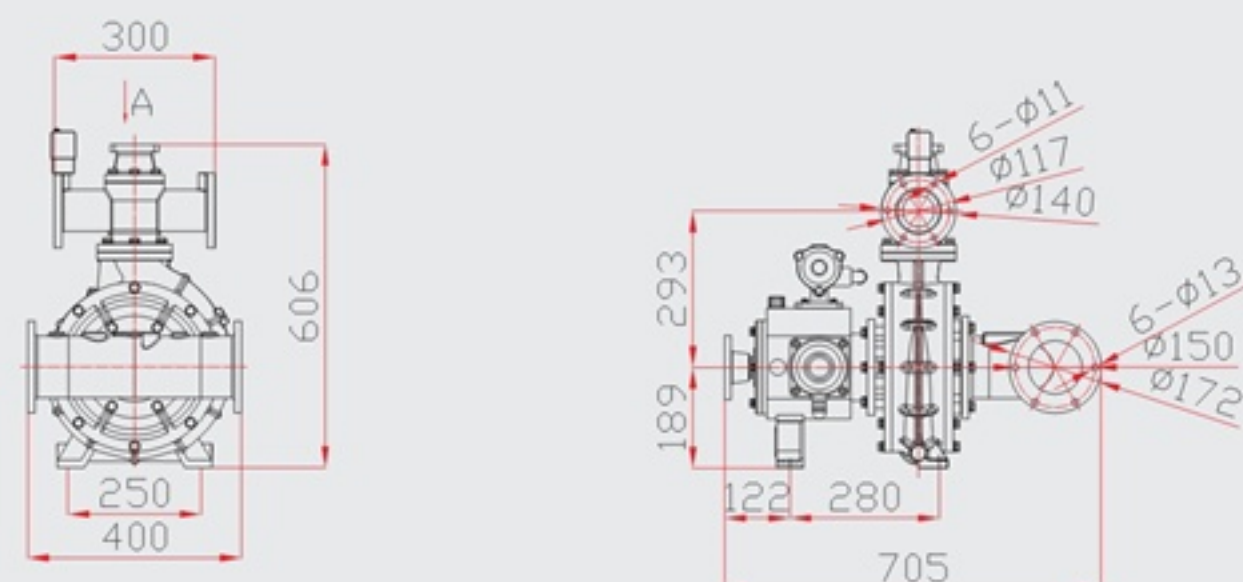


样式二 / Style two

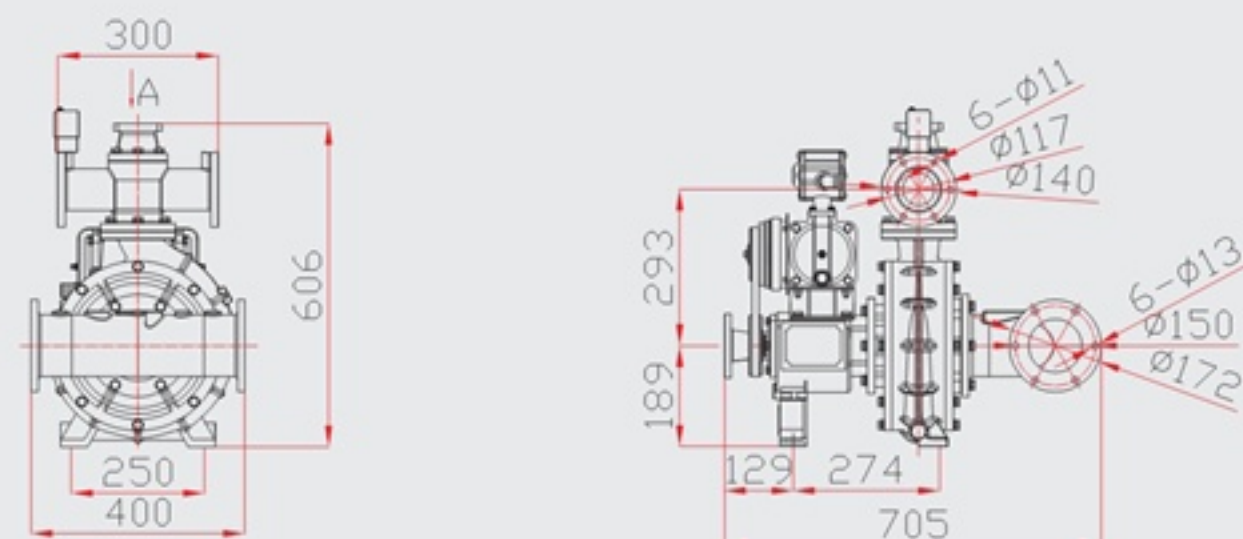


样式三 / Style three

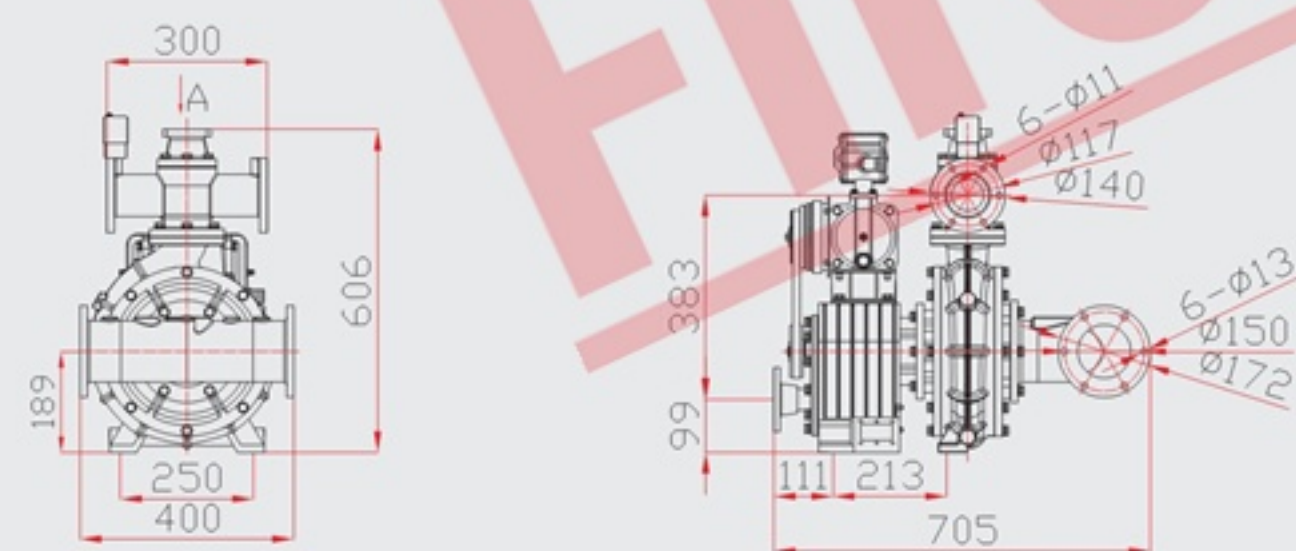


样式四 / Style four

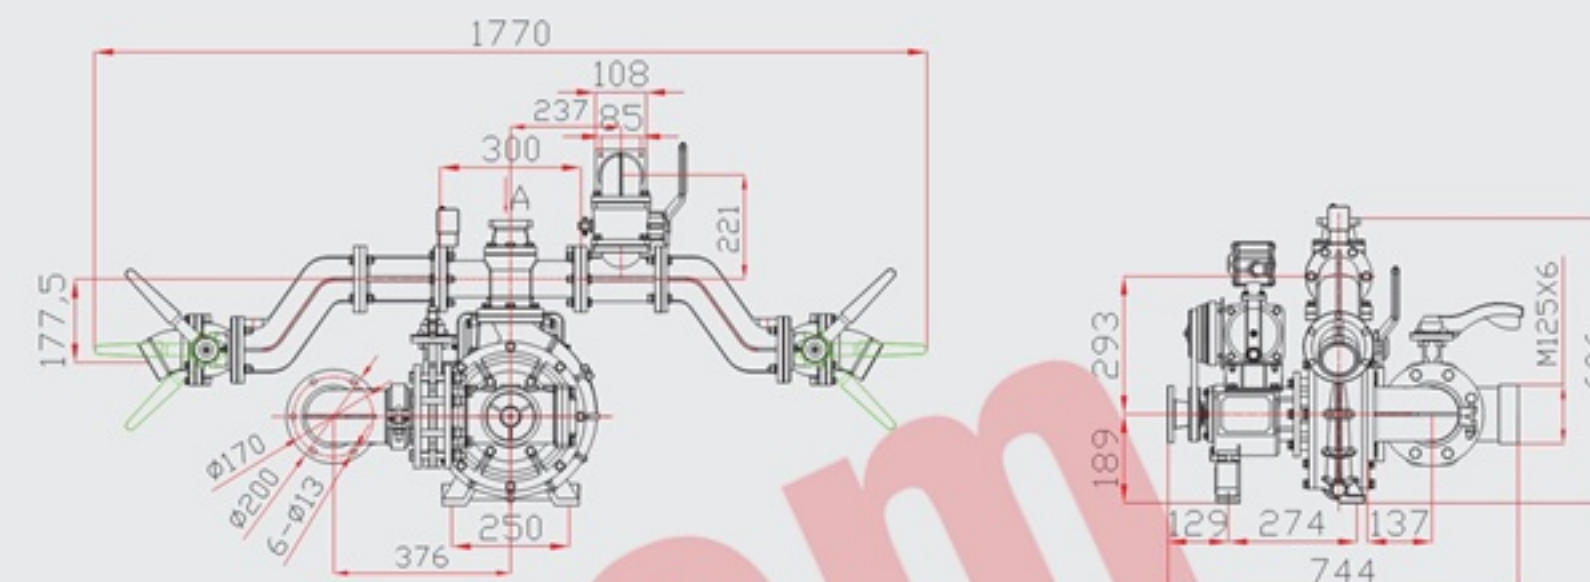

样式五 / Style five

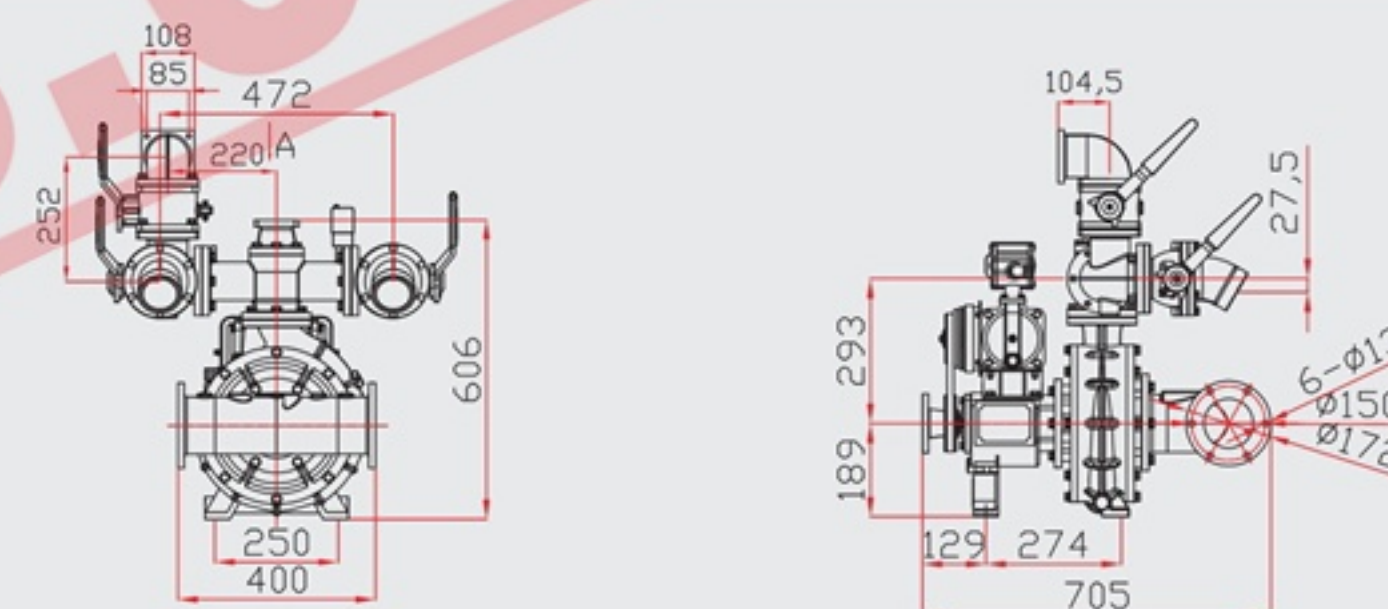

安装尺寸 / Installation dimension

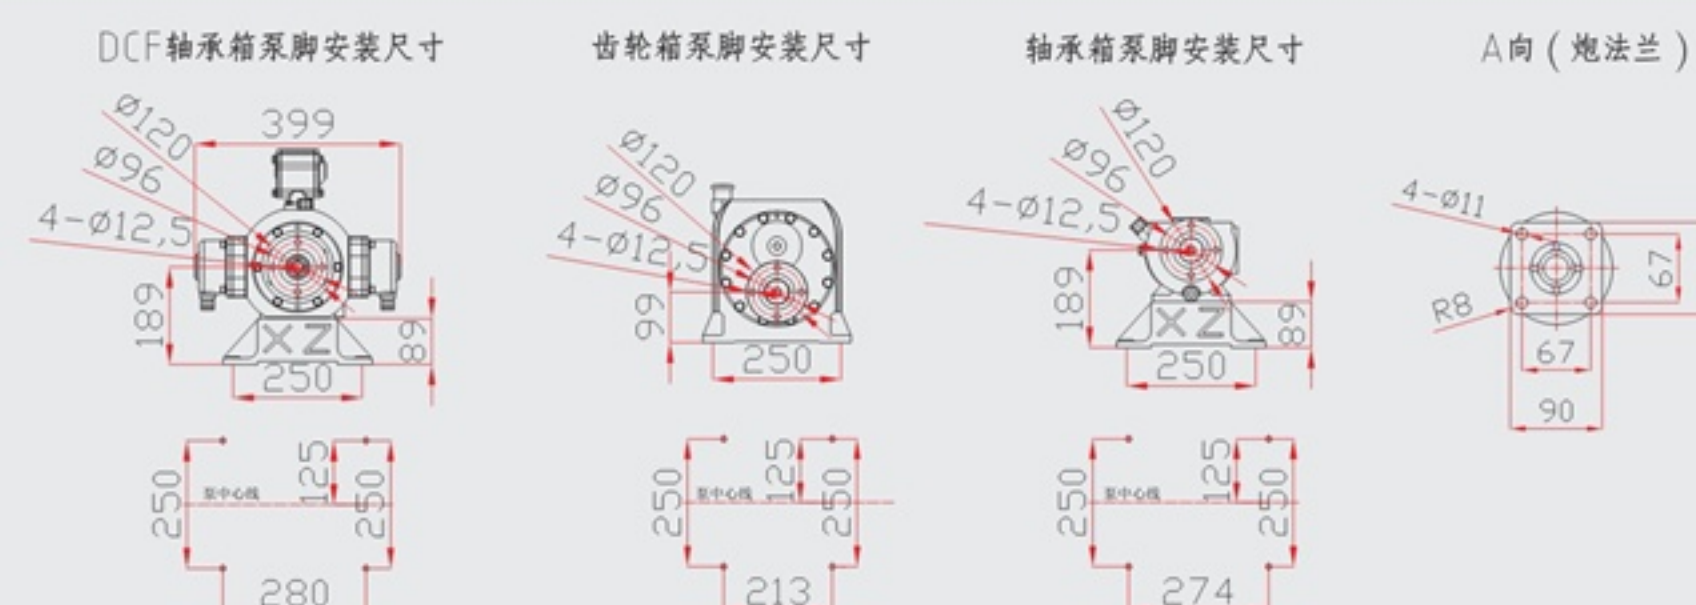

CB10/20-XZ

车用消防泵 / Vehicle fire pump

CB10/20-XZ低压车用消防泵结构采用单级离心水泵，水泵壳体使用硅黄铜材料耐腐蚀。水泵可使用油马达带动。产品具有运行稳定、结构紧凑、操作方便、性能可靠的特点。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.069、1.143、1.222、1.307、1.4、1.5。

The CB10/20-XZ low-pressure vehicle fire pump contains a single-stage centrifugal water pump, where the pump housing is made of the corrosion-resistant silicon brass. The pump can be driven by an oil motor. The product has the characteristics of stable operation, compact structure, convenient operation and reliable performance. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.069, 1.143, 1.222, 1.307, 1.4, 1.5.





产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	20	1.00	3309±50	36	3
2	17	1.00	3275±50	32	3
3	15	1.00	3259±50	29	3

CB10/20-XZ 安装尺寸图

CB10/20-XZ Installation Dimension Drawing

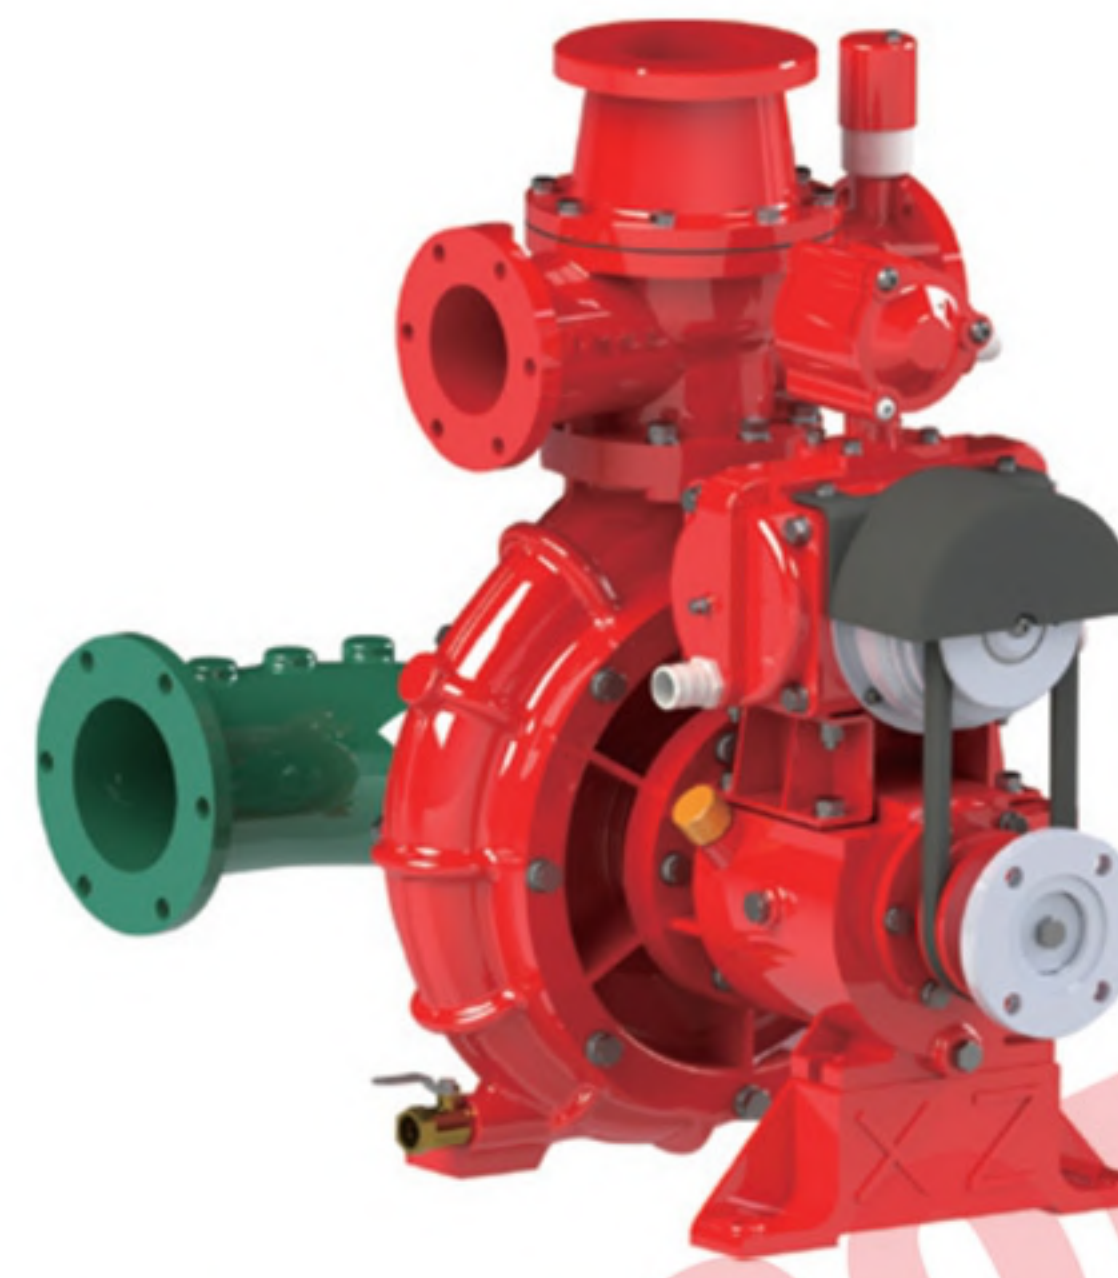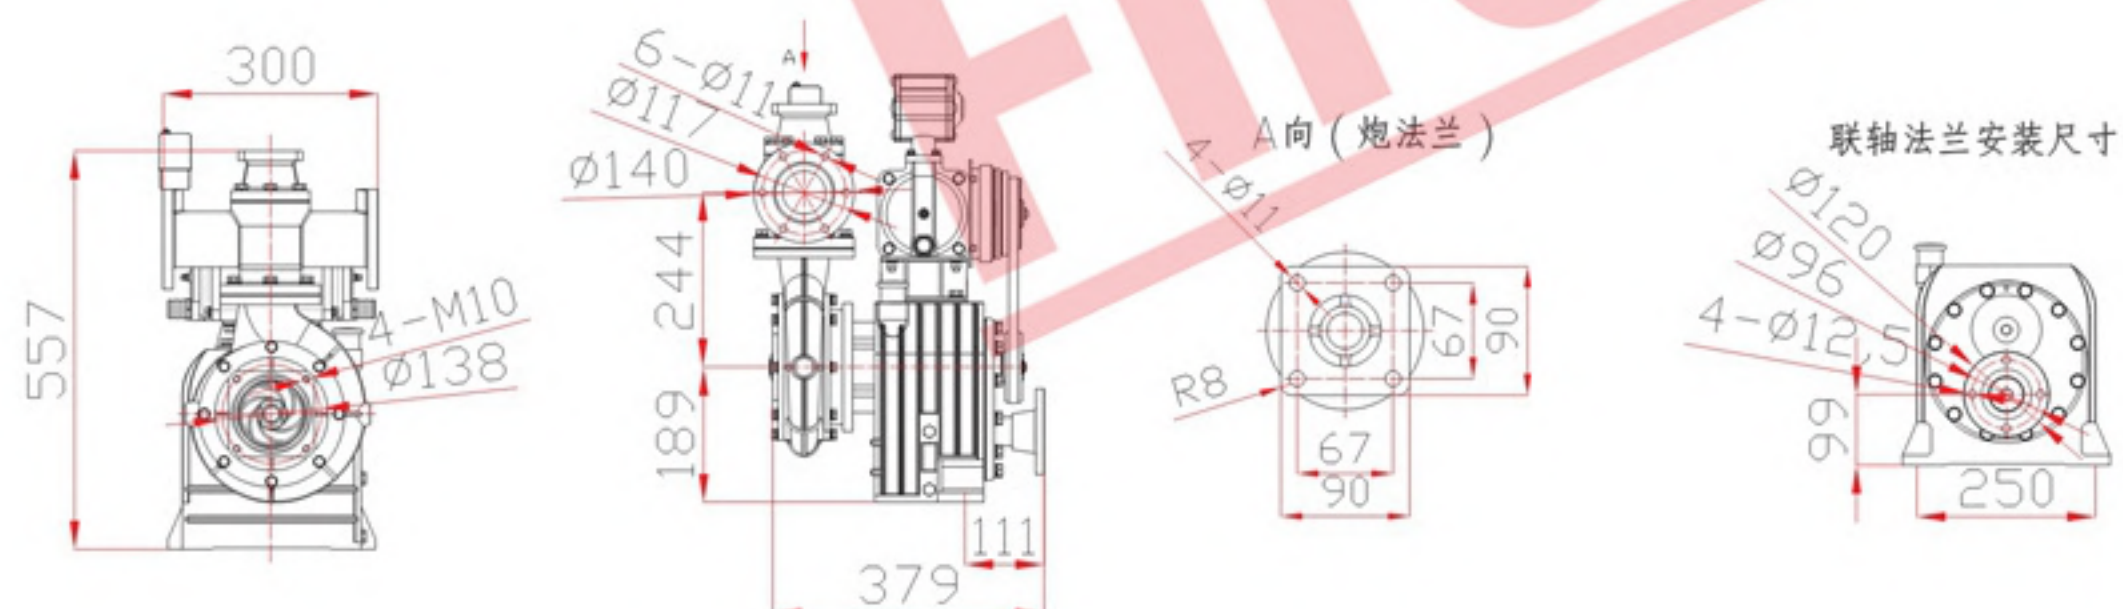

CB10/30-XZ

车用消防泵 / Vehicle fire pump

CB10/30-XZ低压车用消防泵结构采用单级离心水泵，采用两活塞引水装置，泵转动时带动引水装置，满足压力后引水装置自动脱离。产品运行稳定，质量可靠，可选配多种进水管路和出水管路。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.069、1.143、1.222、1.307、1.4、1.5。

The CB10/30-XZ low-pressure vehicle fire pump contains a single-stage centrifugal water pump, which adopts a two-piston water diversion device. When the pump rotates, it drives the diversion device which will automatically disengage when the pressure requirement is met. The product runs stably and has reliable quality. It can be equipped with a variety of inlet and outlet pipes. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.069, 1.143, 1.222, 1.307, 1.4, 1.5.

产品性能参数 / PRODUCT PERFORMANCE PARAMETERS


工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	30	1.00	3045±50	48	3
2	21	1.30	3365±50	52	3
3	15	1.00	2992±50	34	7




CB10/30-XZ 安装尺寸图

CB10/30-XZ Installation Dimension Drawing

样式一 / Style one

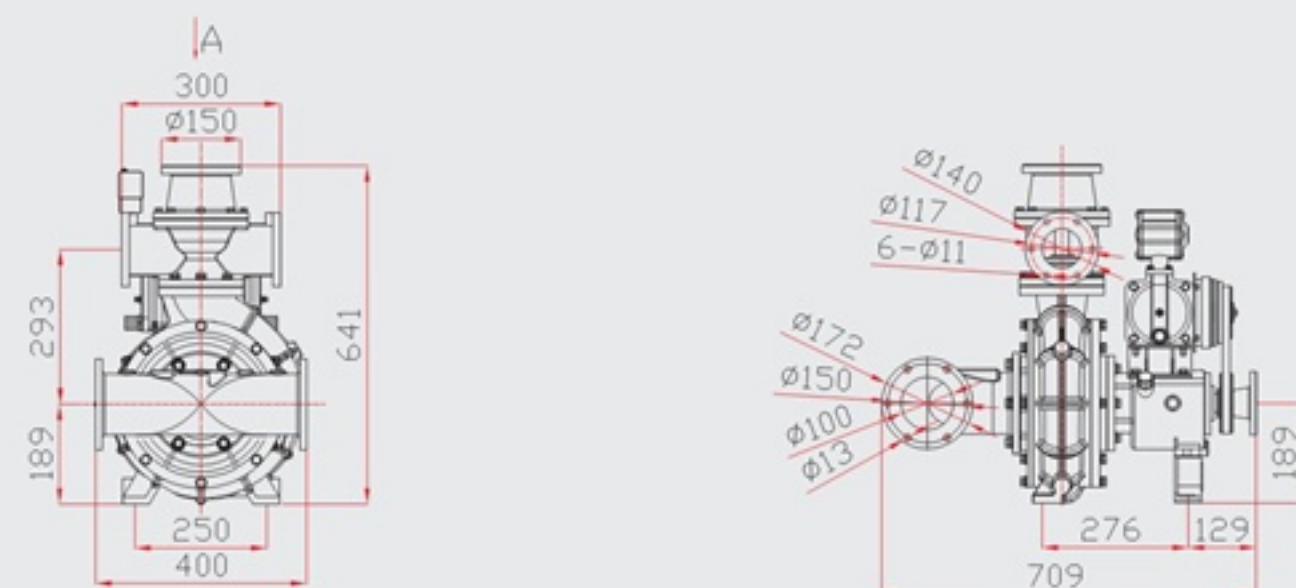


样式二 / Style two

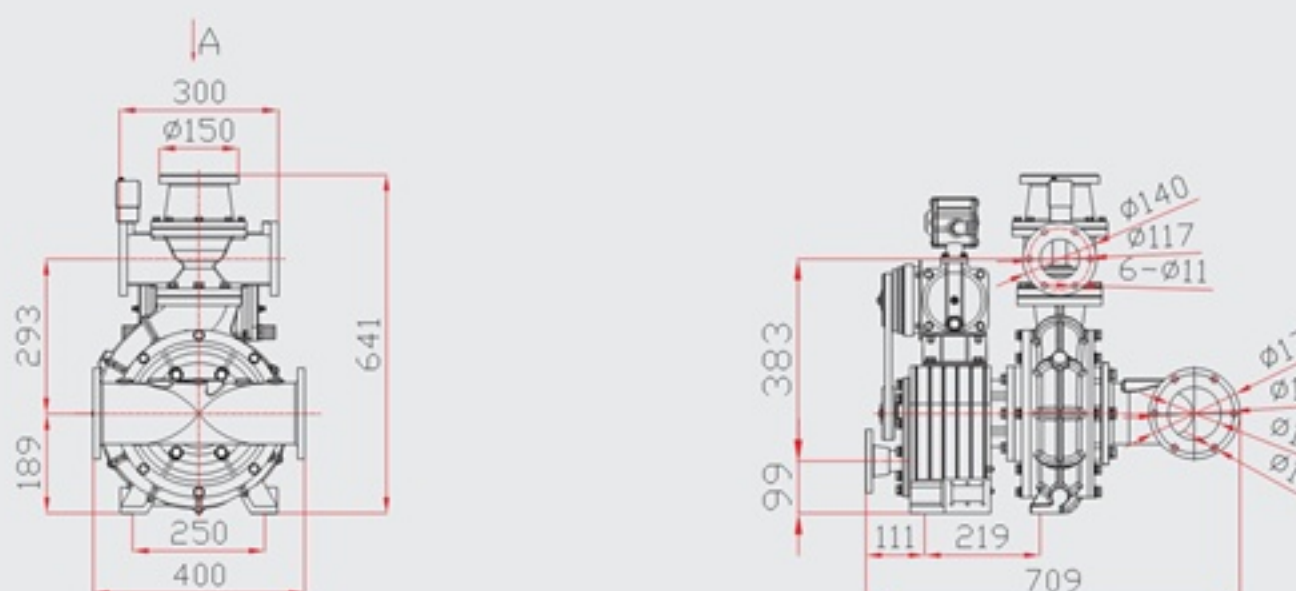


样式三 / Style three




样式四 / Style four

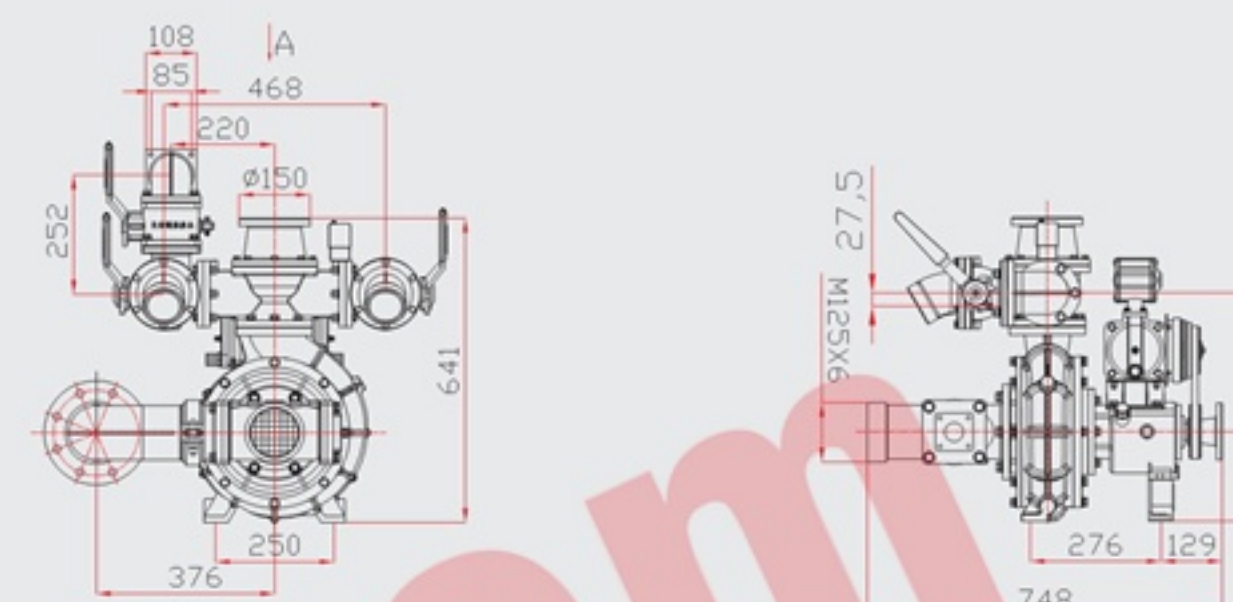



样式五 / Style five

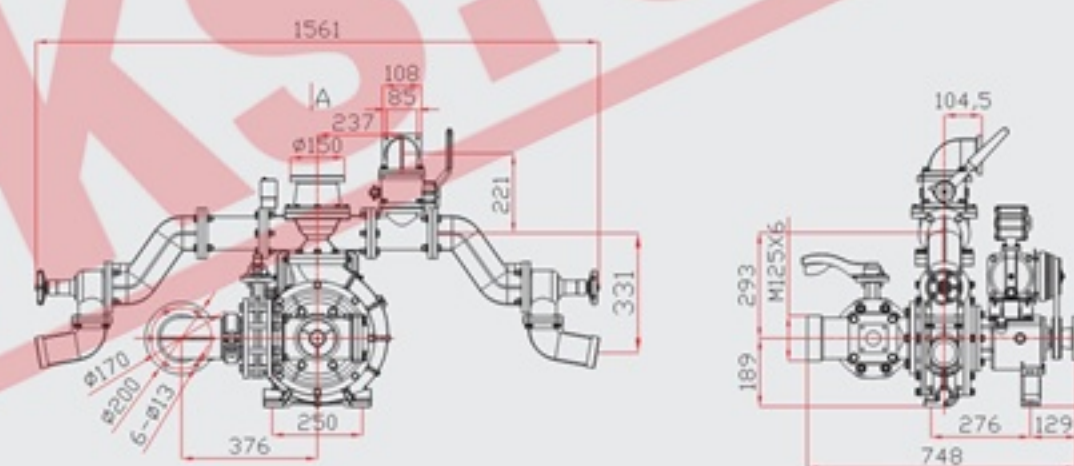

样式六 / Style six

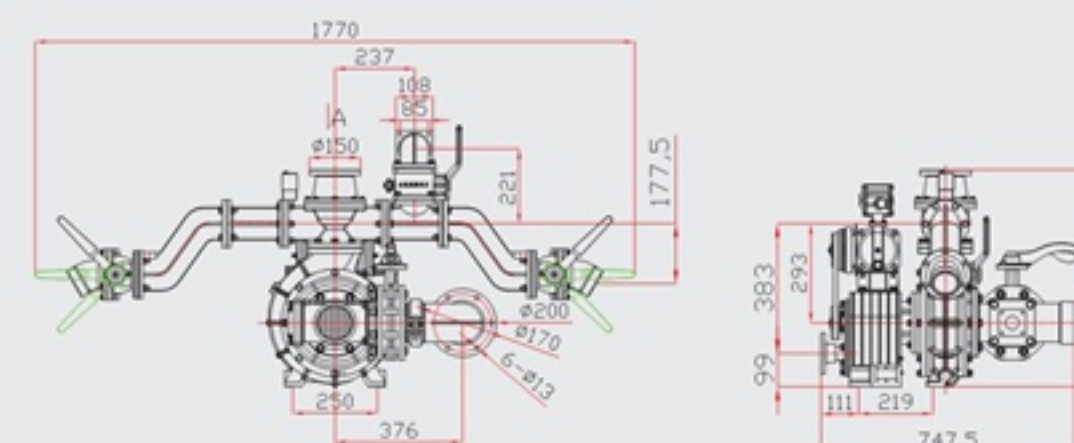

安装尺寸 / Installation dimension

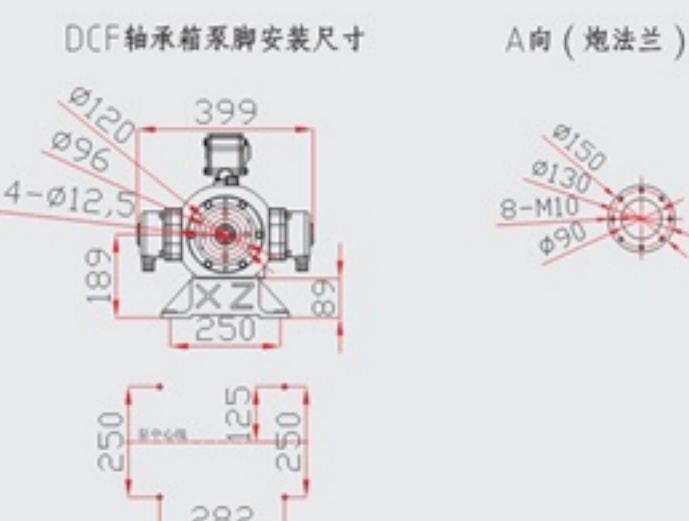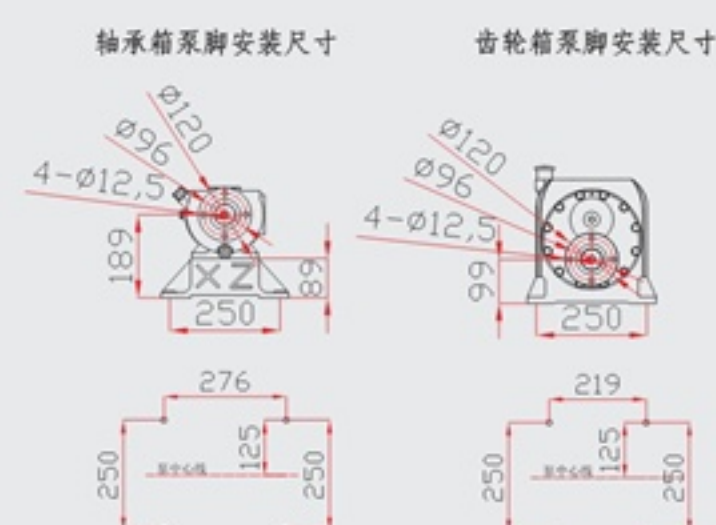



CB10/40-XZ

车用消防泵 / Vehicle fire pump

CB10/40-XZ低压车用消防泵结构采用单级离心水泵，采用两活塞引水装置，泵转动时带动引水装置，满足压力后引水装置自动脱离。产品性能优良、结构紧凑、操作简单、维护方便。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.069、1.143、1.222、1.307、1.4、1.5。

The CB10/40-XZ low-pressure vehicle fire pump contains a single-stage centrifugal water pump, which adopts a two-piston water diversion device. When the pump rotates, it drives the diversion device which will automatically disengage when the pressure requirement is met. The product has the characteristics of high performance, compact structure, easy operation and convenient maintenance. It has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.069, 1.143, 1.222, 1.307, 1.4, 1.5.


产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	40	1.00	3135±50	60	3
2	28	1.30	3390±50	61	3
3	20	1.00	3010±50	39	7


CB10/40-XZ 安装尺寸图

CB10/40-XZ Installation Dimension Drawing


样式一 / Style one

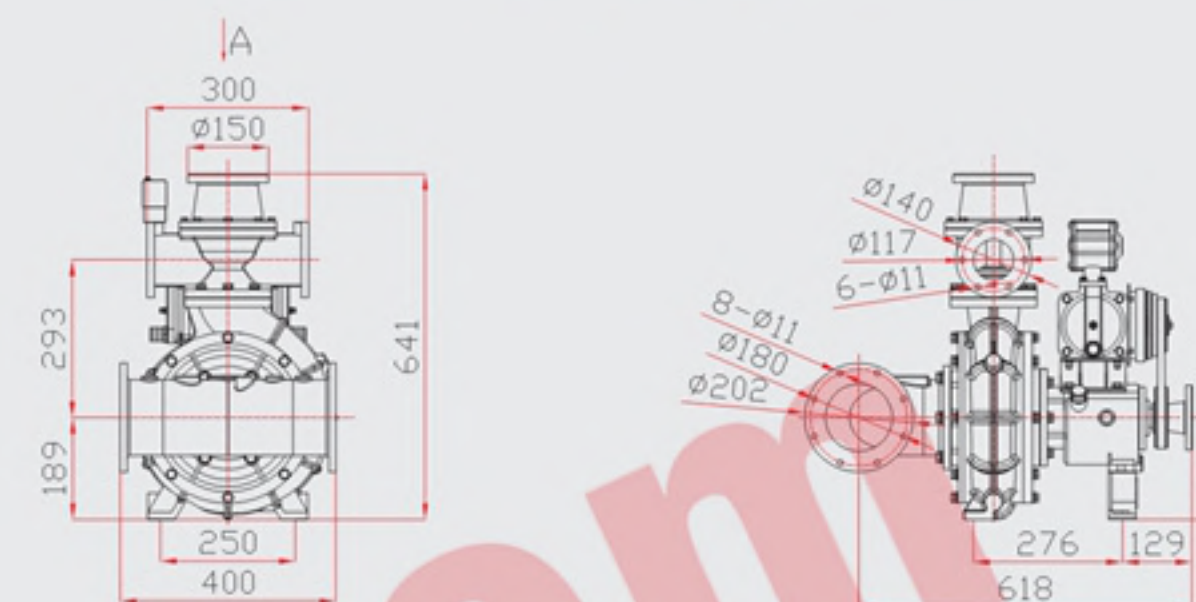

样式二 / Style two

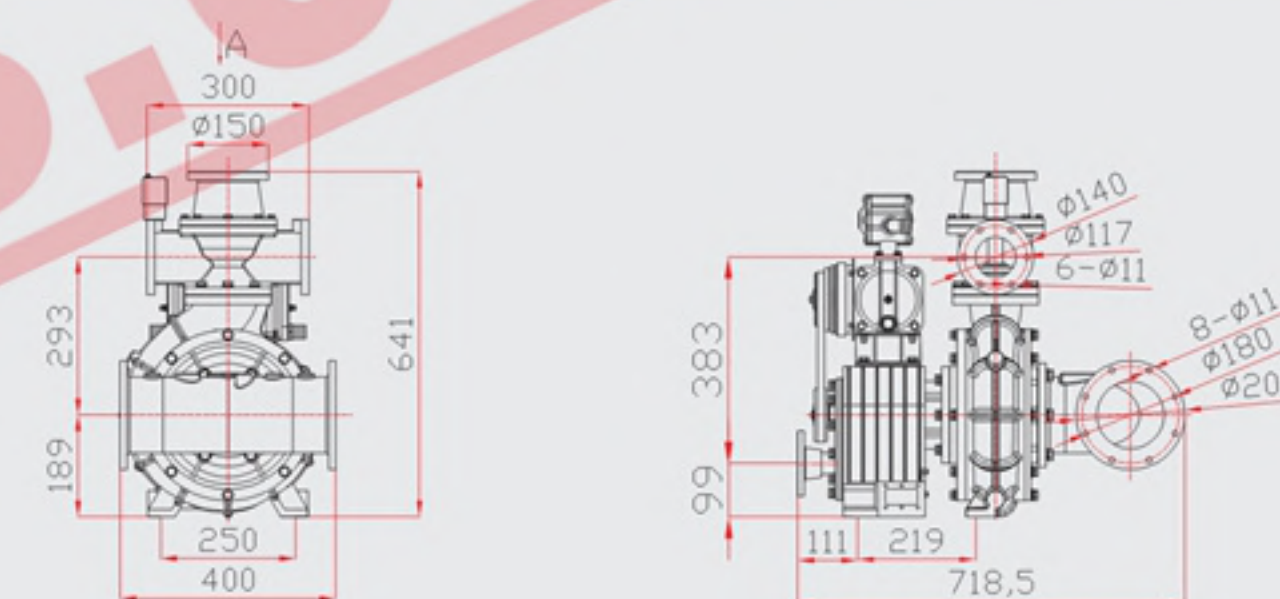


样式三 / Style three

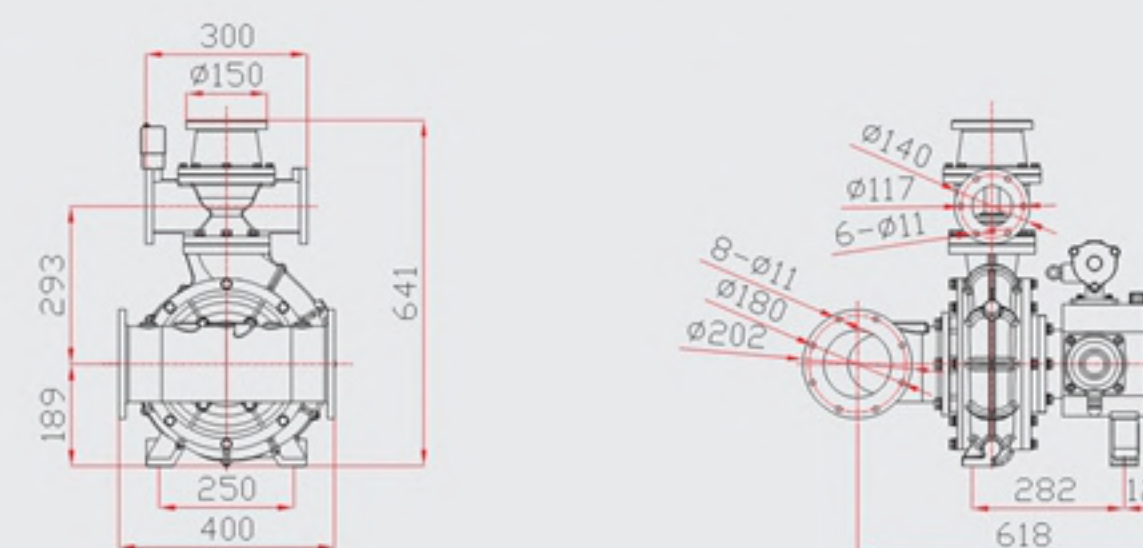


CB10/60-XZ 安装尺寸图

CB10/60-XZ Installation Dimension Drawing


样式一 / Style one

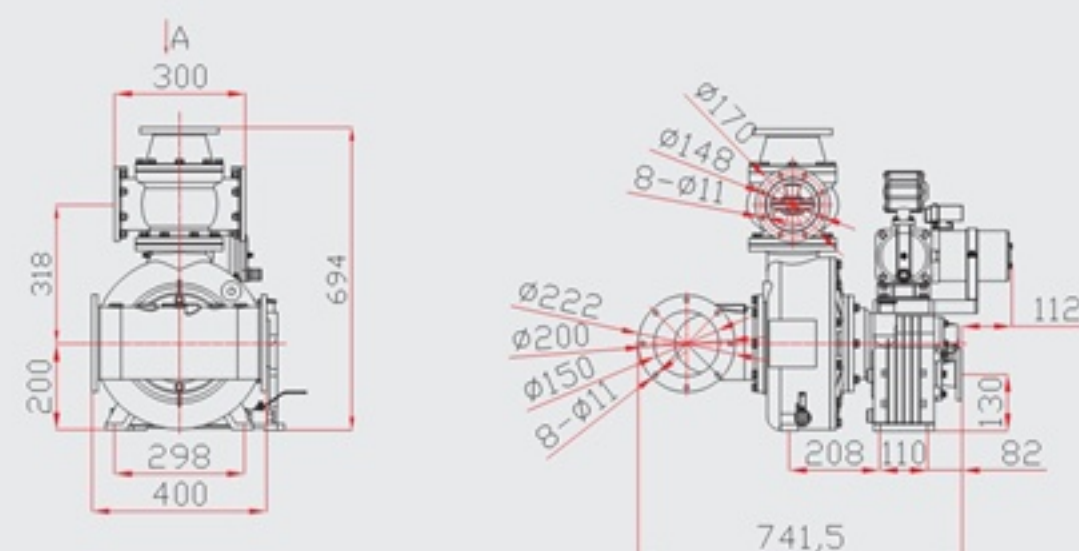


样式二 / Style two

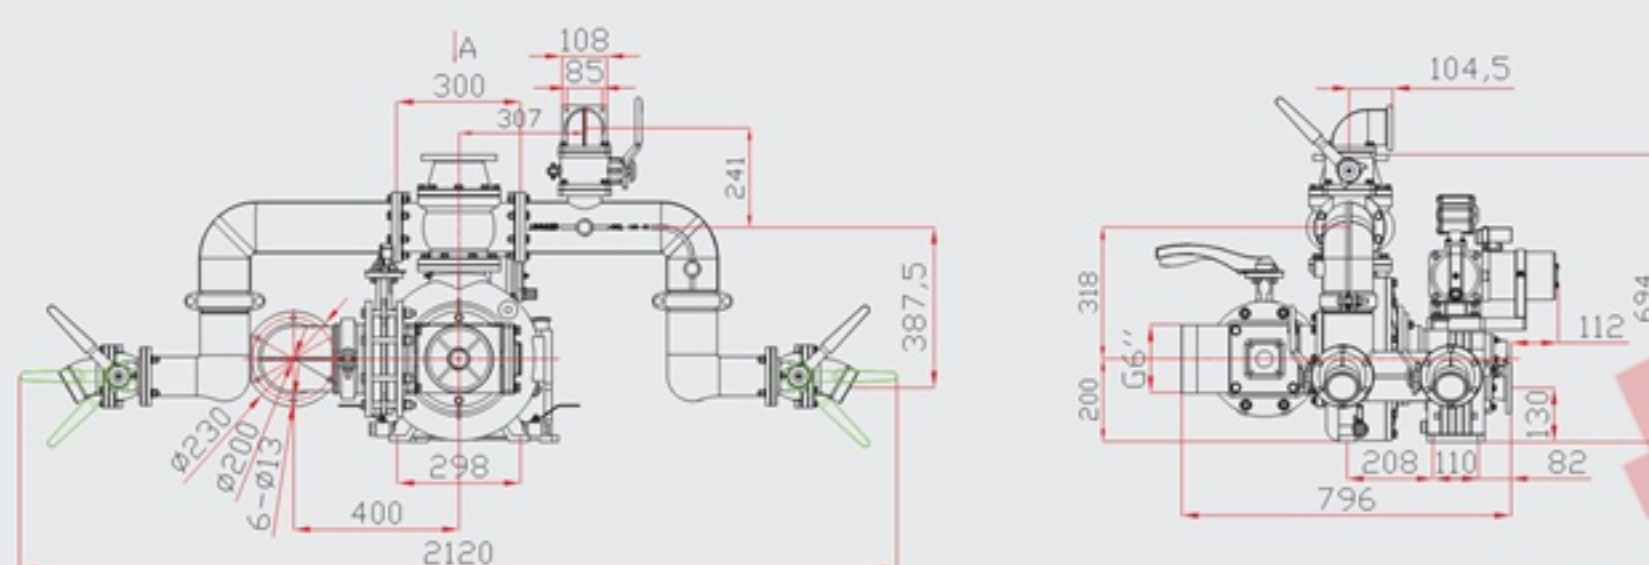


样式三 / Style three

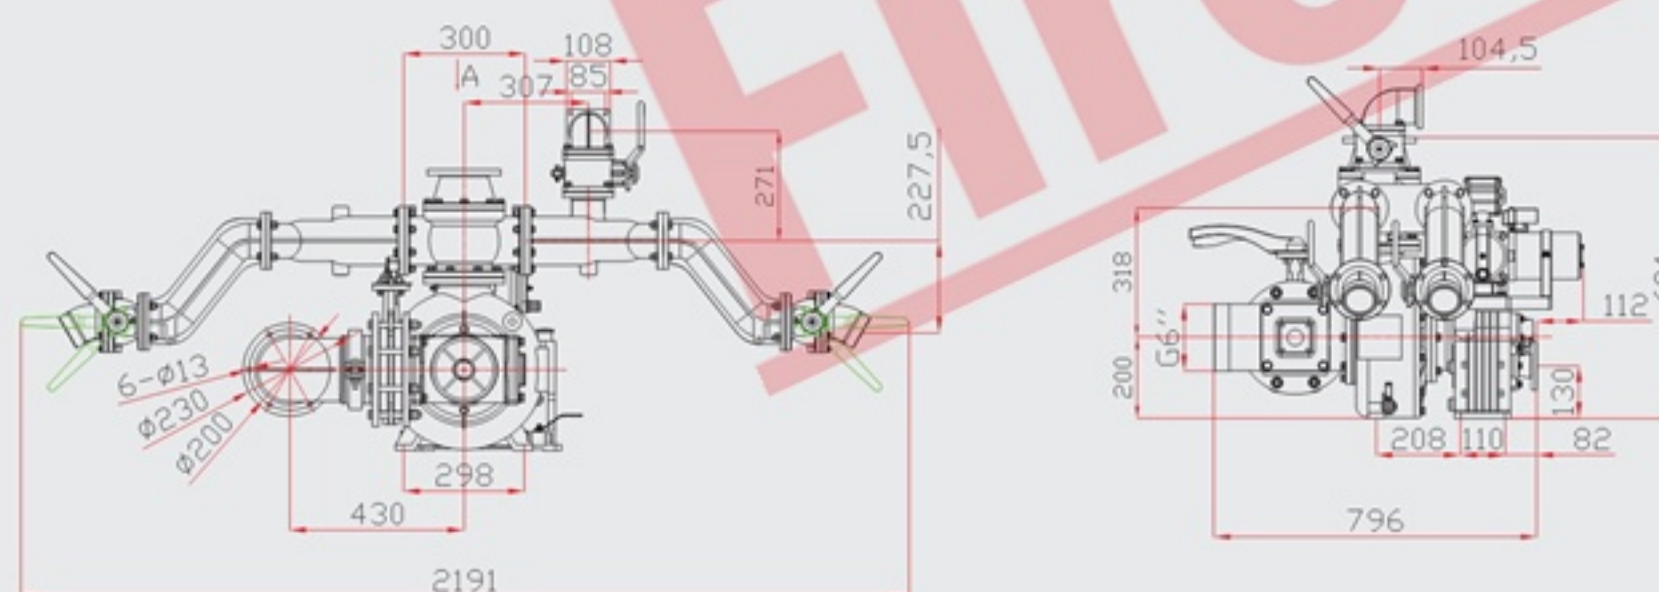


样式四 / Style four

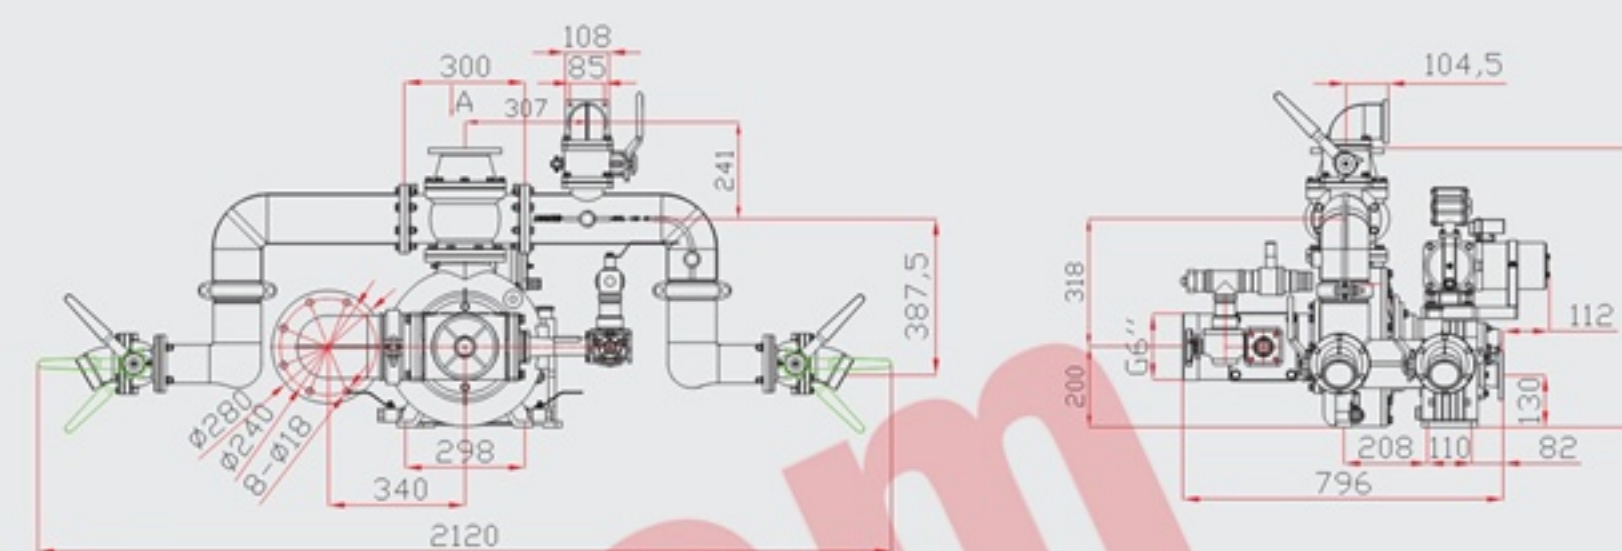

样式五 / Style five

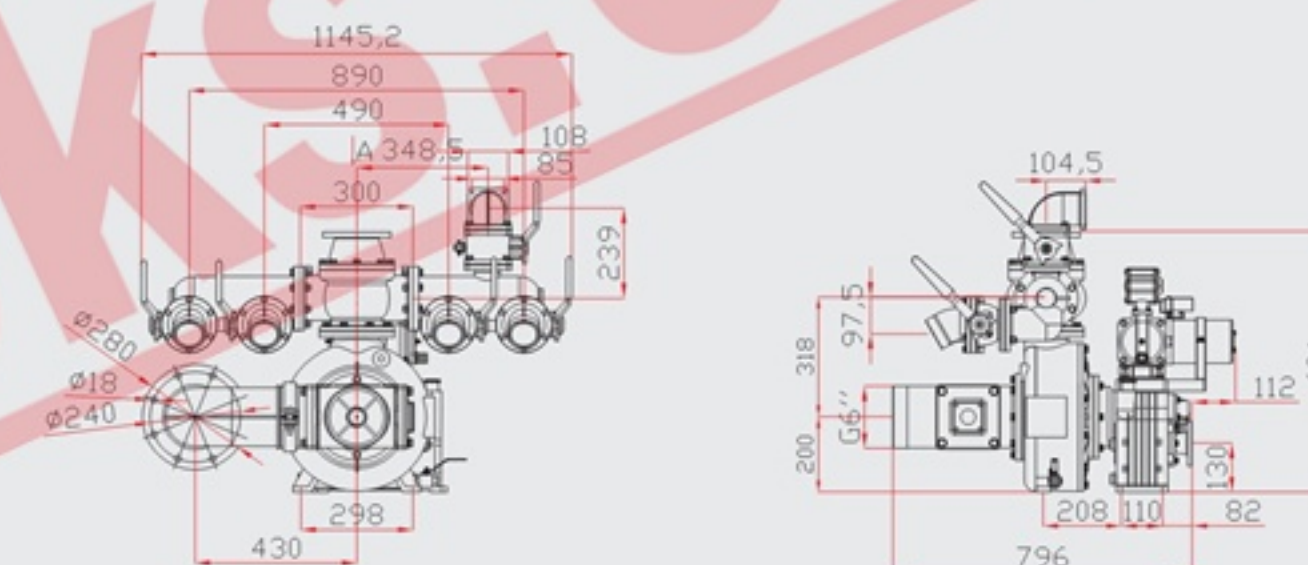


样式六 / Style six

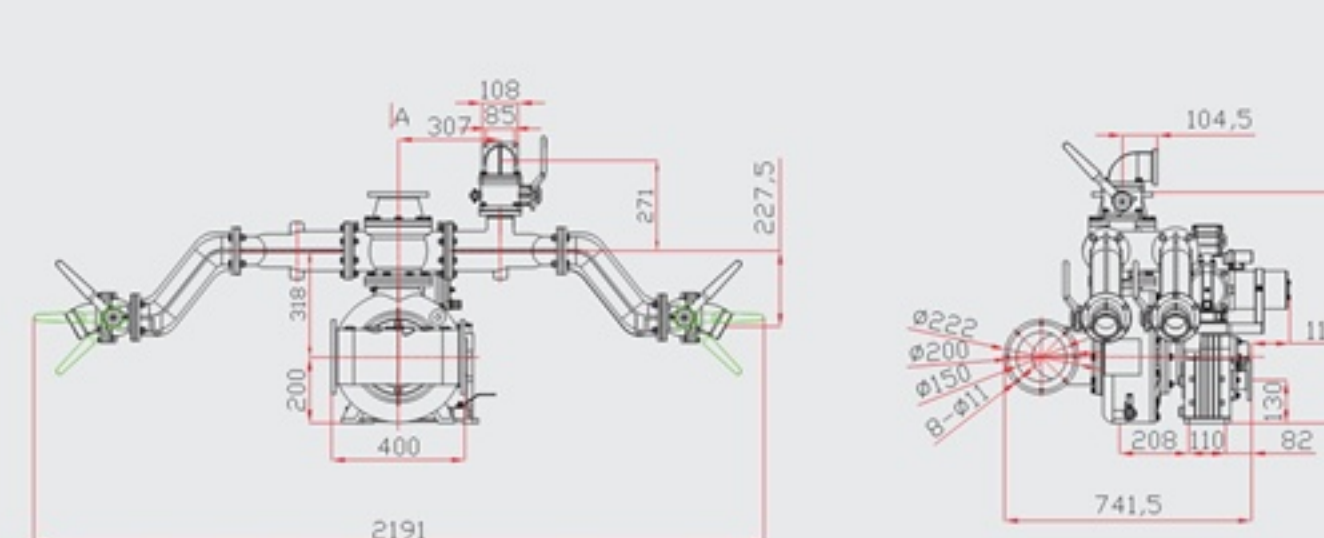

安装尺寸 / Installation dimension

联轴法兰安装尺寸

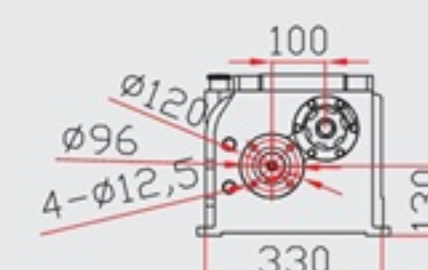

泵脚安装尺寸



A向 (炮法兰)




CB10/80-XZ低压车用消防泵引进国外先进技术，创新研发理念，采用双级叶轮，泵壳导叶一体式结构，出水均衡、稳定、可靠。泵引水装置可选择电动或皮带驱动，产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.033、1.178、1.259、1.346、1.44、1.541、1.652、1.772。

CB10/80-XZ low-pressure vehicle fire pump incorporates advanced foreign technologies and innovative research and development concepts. It adopts a two-stage impeller and the integrated pump shell/guide vane structure, which can produce balanced, stable and reliable water flow. The diversion device of the pump can be driven by electrically or through a belt. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.033, 1.178, 1.259, 1.346, 1.44, 1.541, 1.652, 1.772.

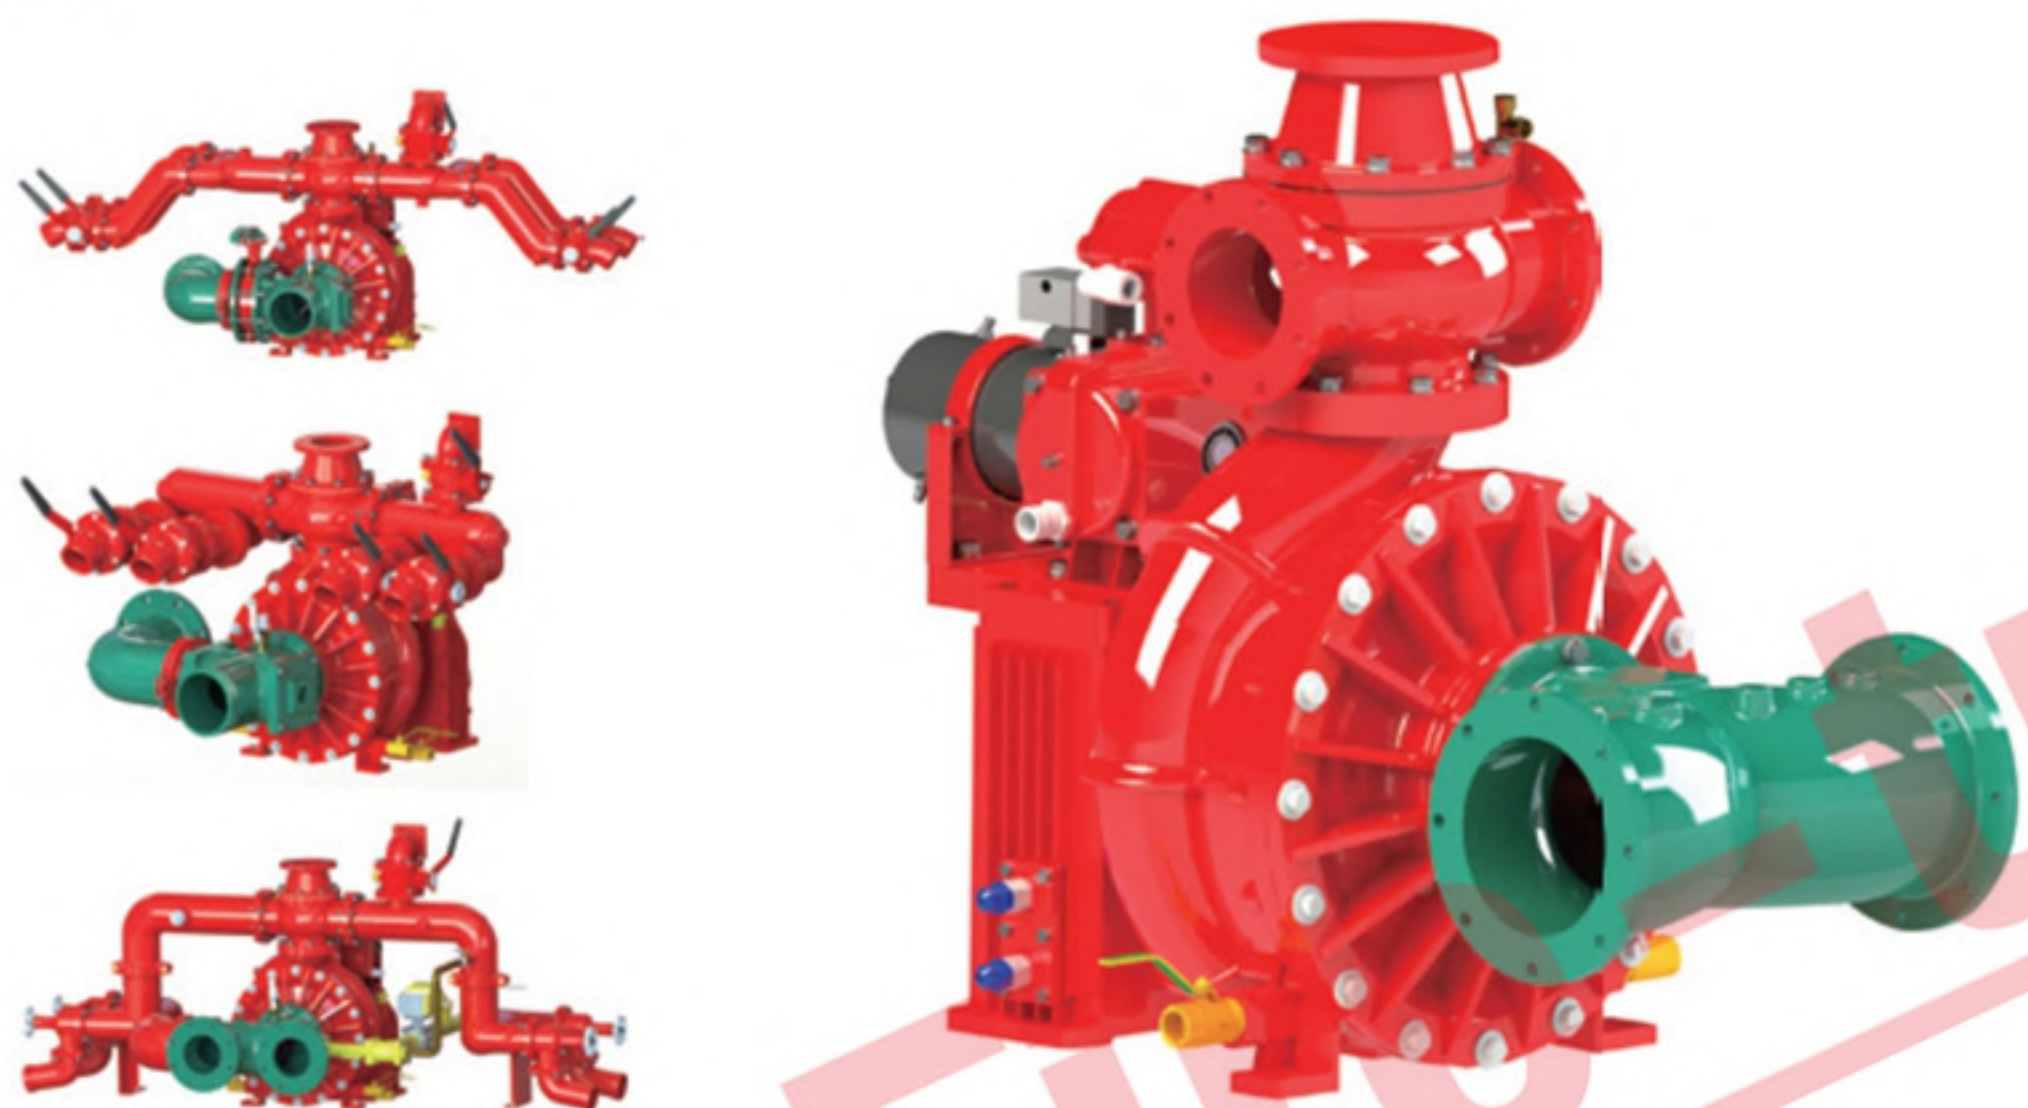

产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	80	1.00	2575±50	137	3
2	56	1.30	2650±50	130	3
3	40	1.00	2308±50	83	7




CB10/80-XZ 安装尺寸图

CB10/80-XZ Installation Dimension Drawing


样式一 / Style one




样式二 / Style two

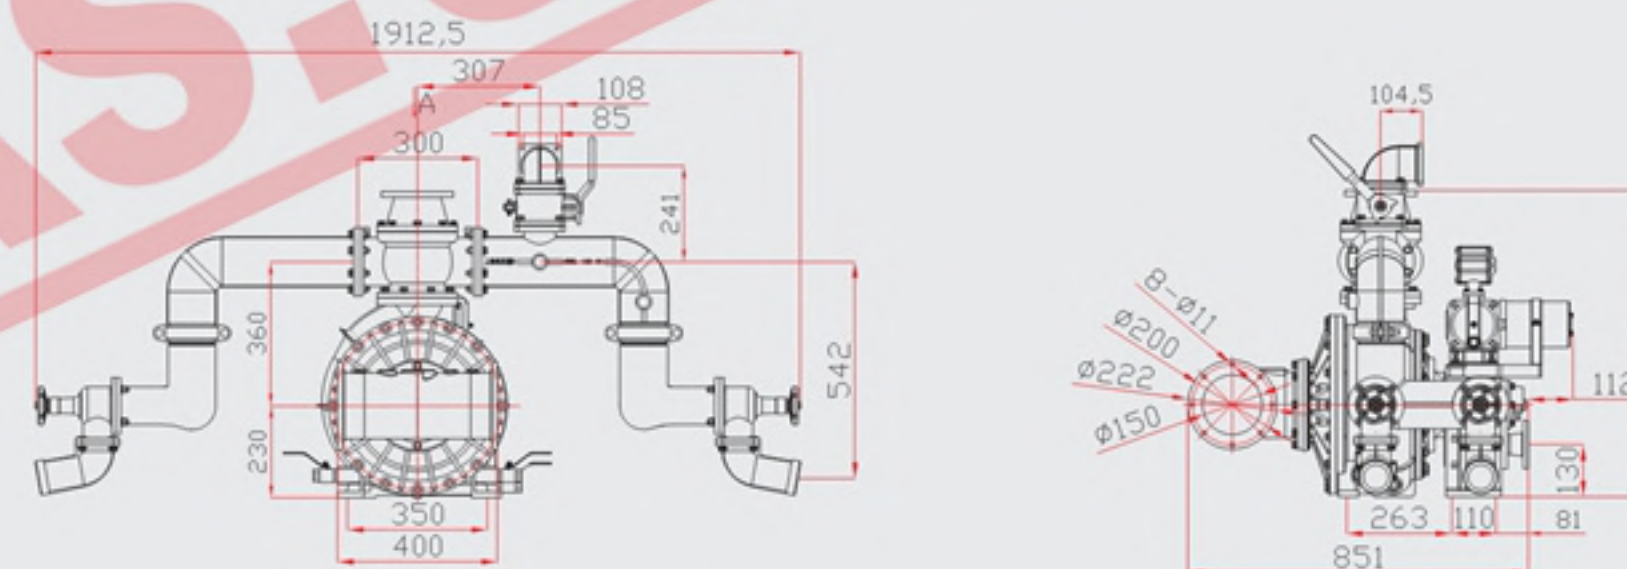


样式三 / Style three

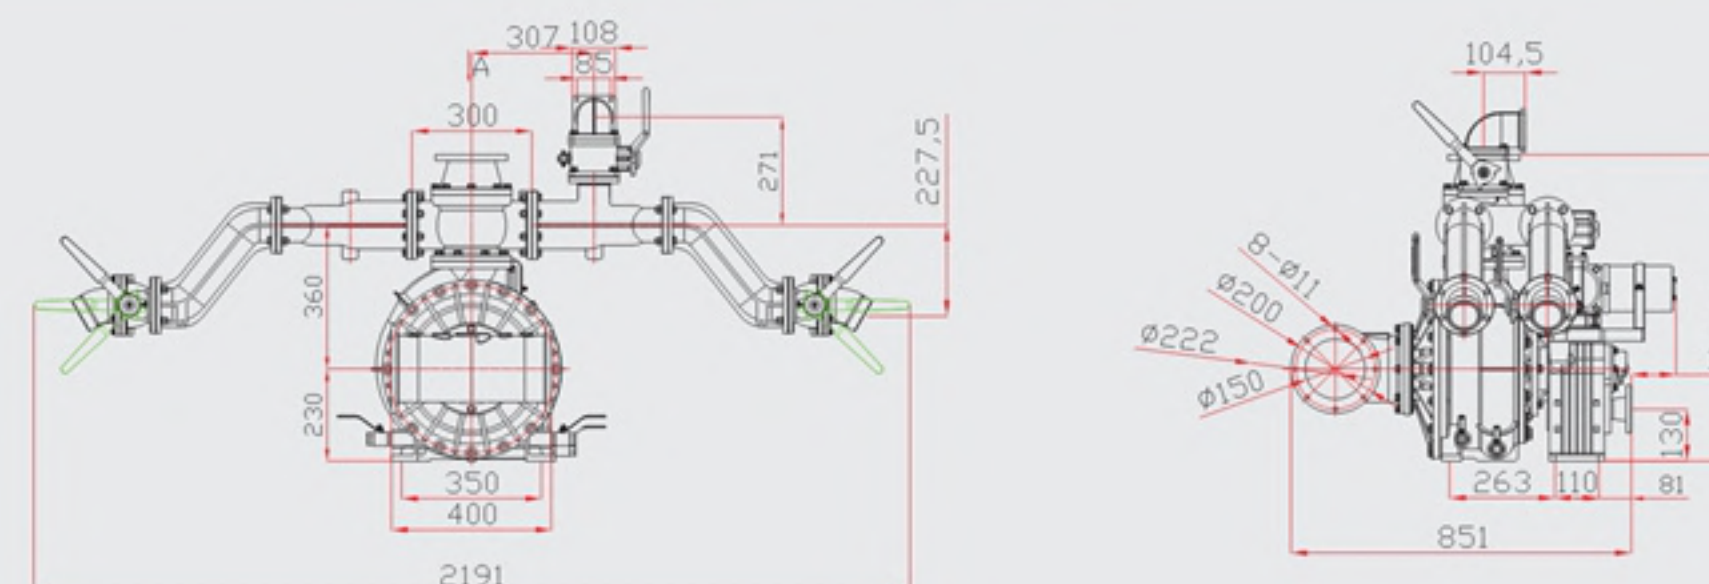


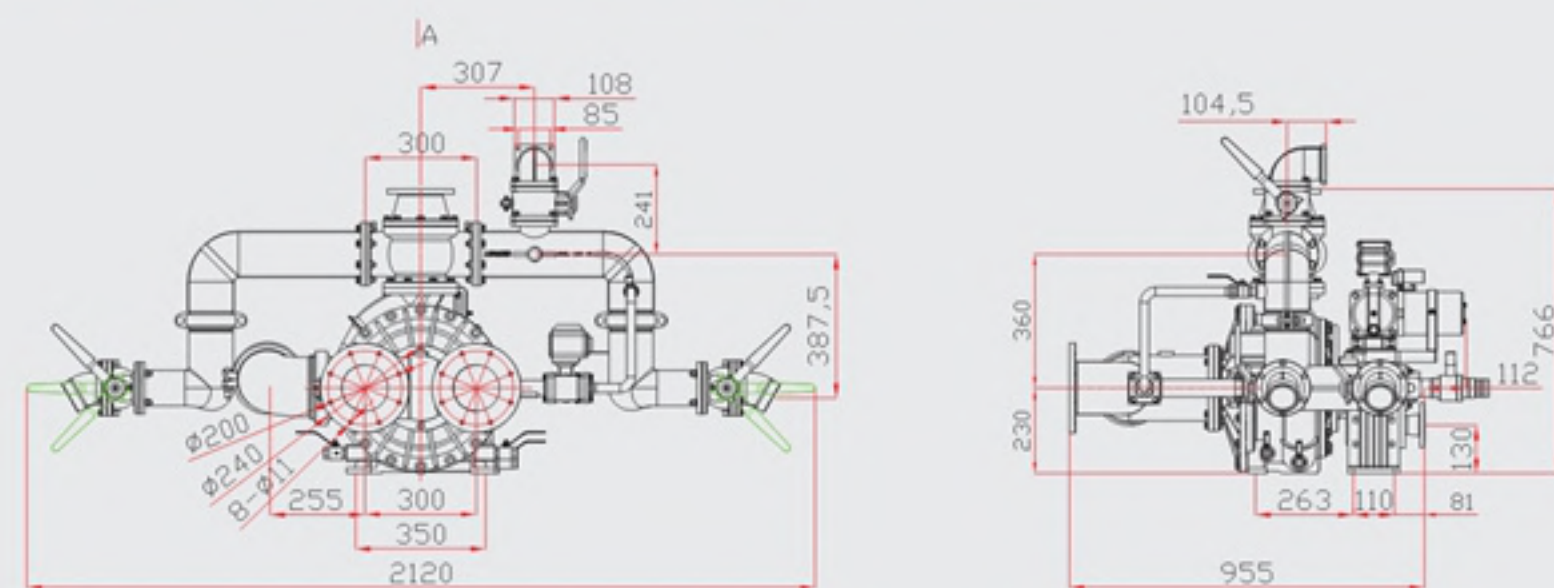

样式五 / Style five

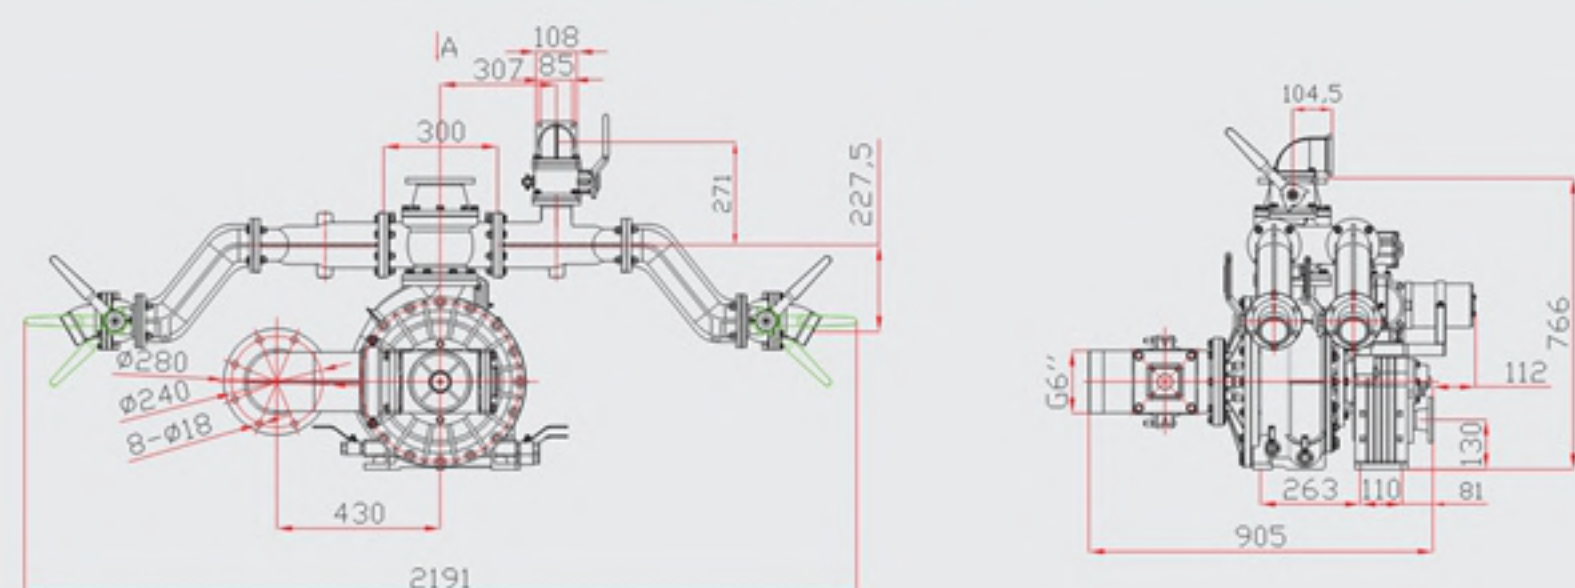

样式六 / Style six

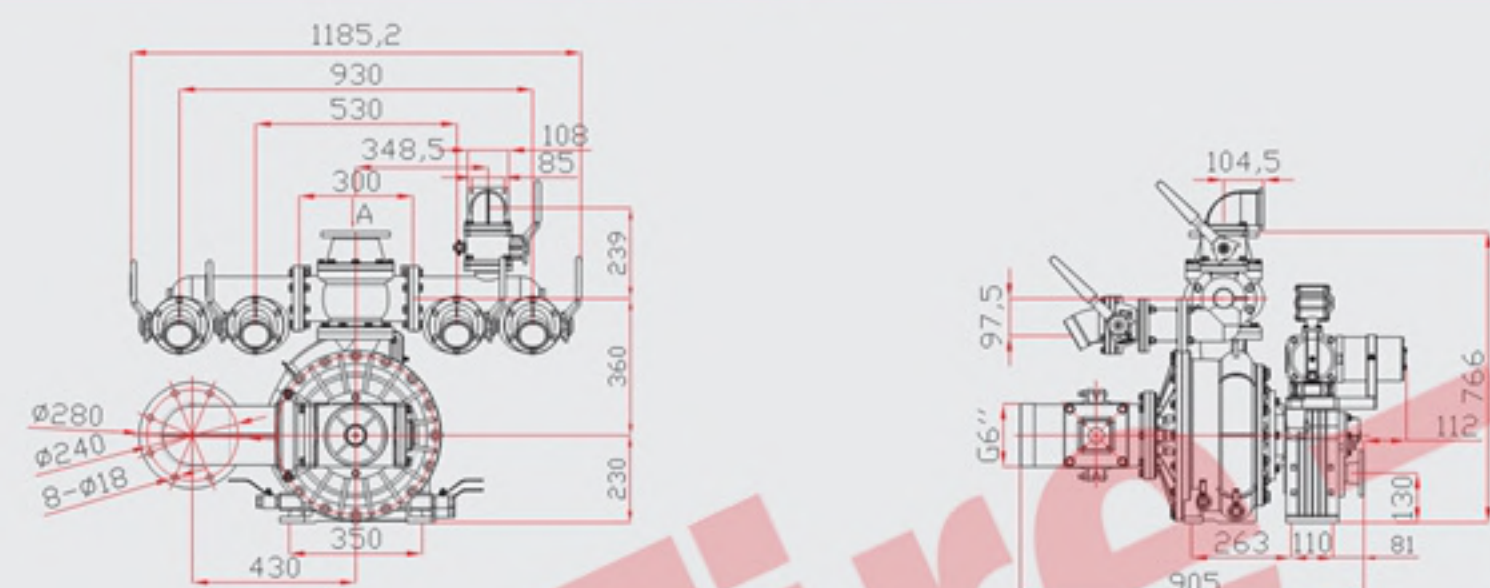

安装尺寸 / Installation dimension



CB16/60-XZ

车用消防泵 / Vehicle fire pump

CB16/60-XZ低压车用消防泵采用双级导叶离心结构,可选择电动活塞引水和皮带驱动活塞引水二种。该水泵可根据流量、转速、压力需求情况变化,与CB10/80同款。产品通过国家3C认证,经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比: 1.033、1.178、1.259、1.346、1.44、1.541、1.652、1.772。

The CB16/60-XZ low-pressure vehicle fire pump adopts a two-stage guide vane centrifugal structure, and is available in two alternatives namely the electric piston water diversion version and the belt drive piston water diversion version. The pump can be adjusted according to flow, RPM and pressure demand, and is of the same design as CB10/80. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.033, 1.178, 1.259, 1.346, 1.44, 1.541, 1.652, 1.772.


产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	60	1.6	2950±50	162.0	3
2	42	2.08	3280±50	180.0	3
3	30	1.6	2850±50	120.0	7


CB16/60-XZ 安装尺寸图

CB16/60-XZ Installation Dimension Drawing


样式一 / Style one

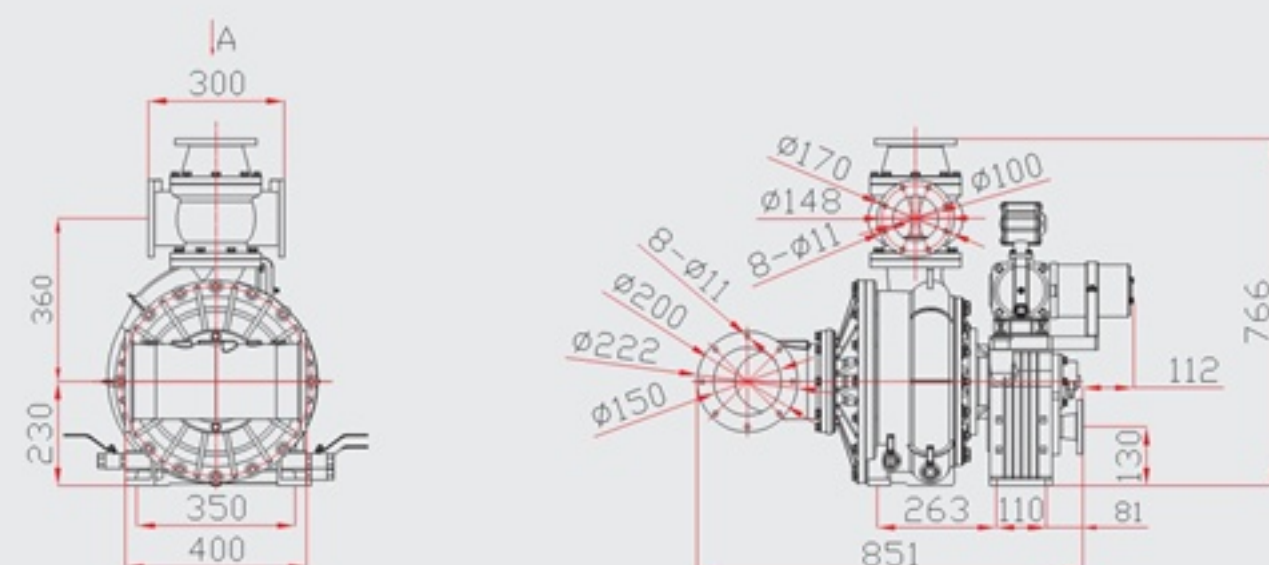

样式二 / Style two

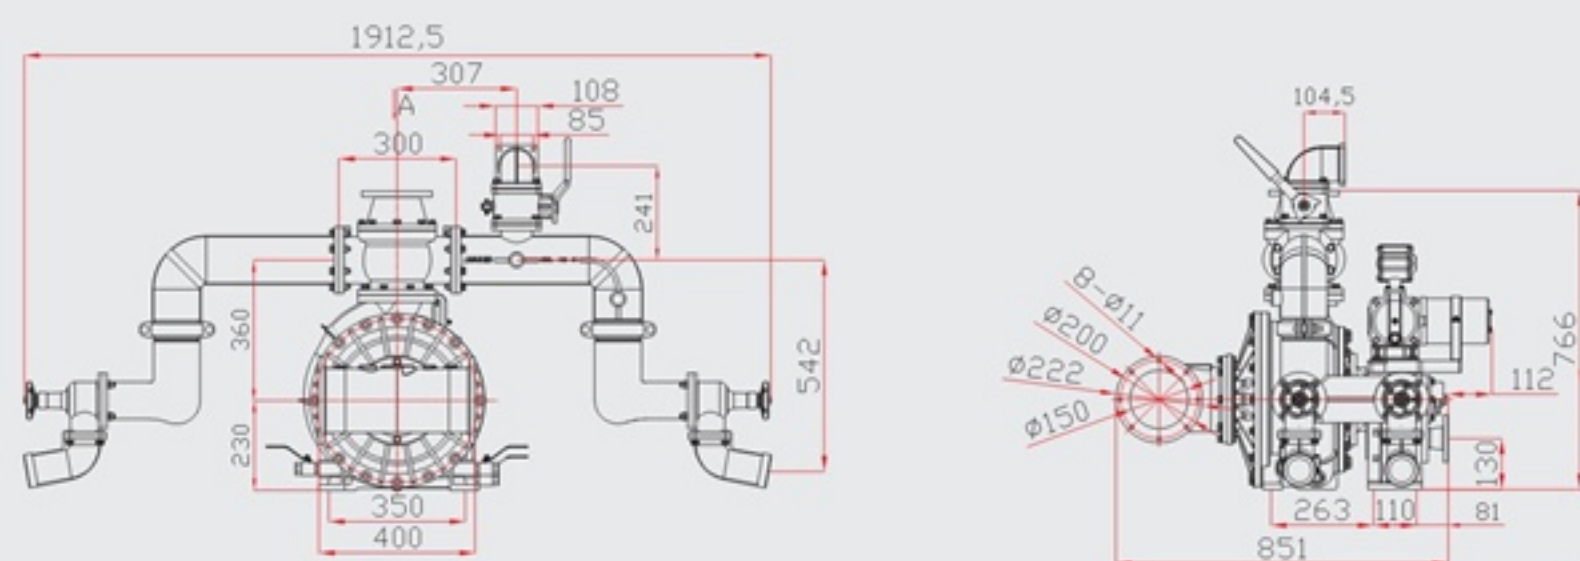


样式三 / Style three

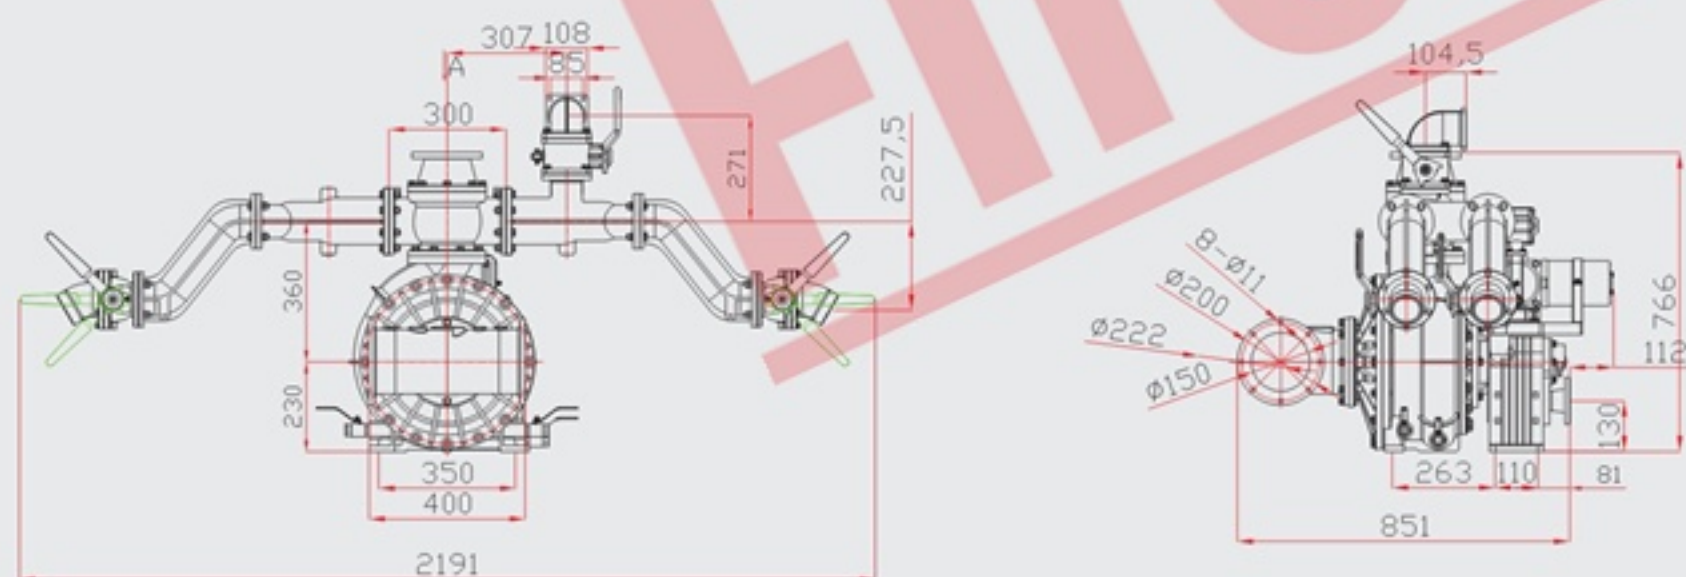


23


样式四 / Style four

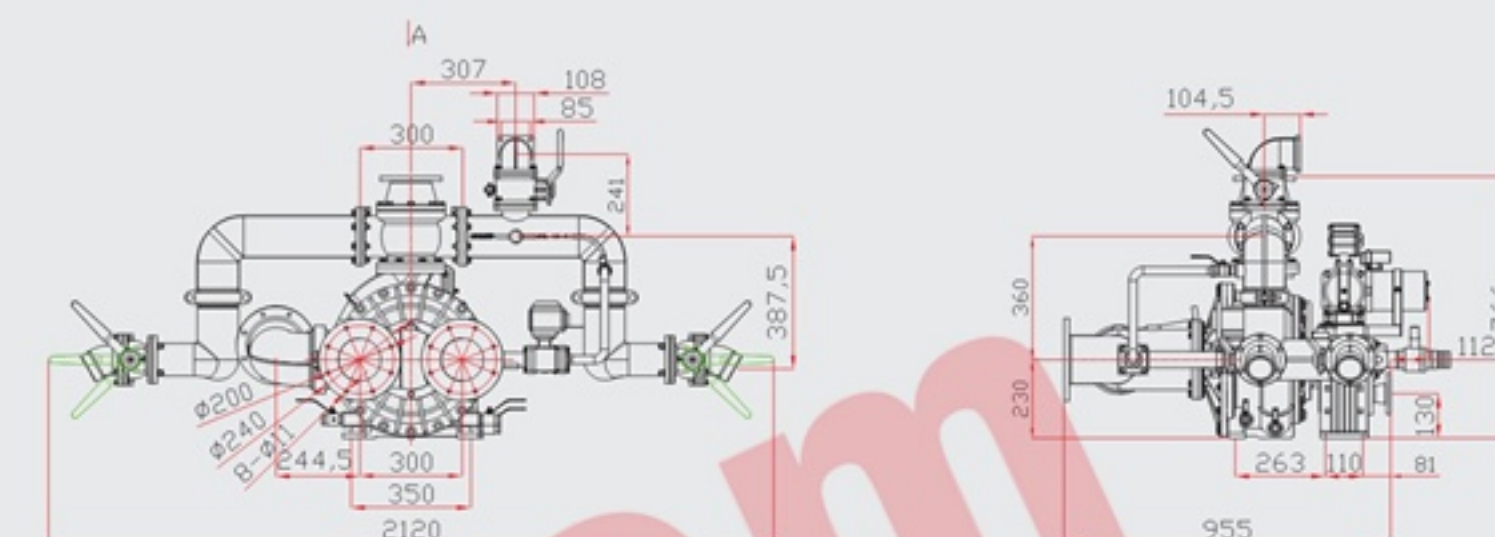

样式五 / Style five

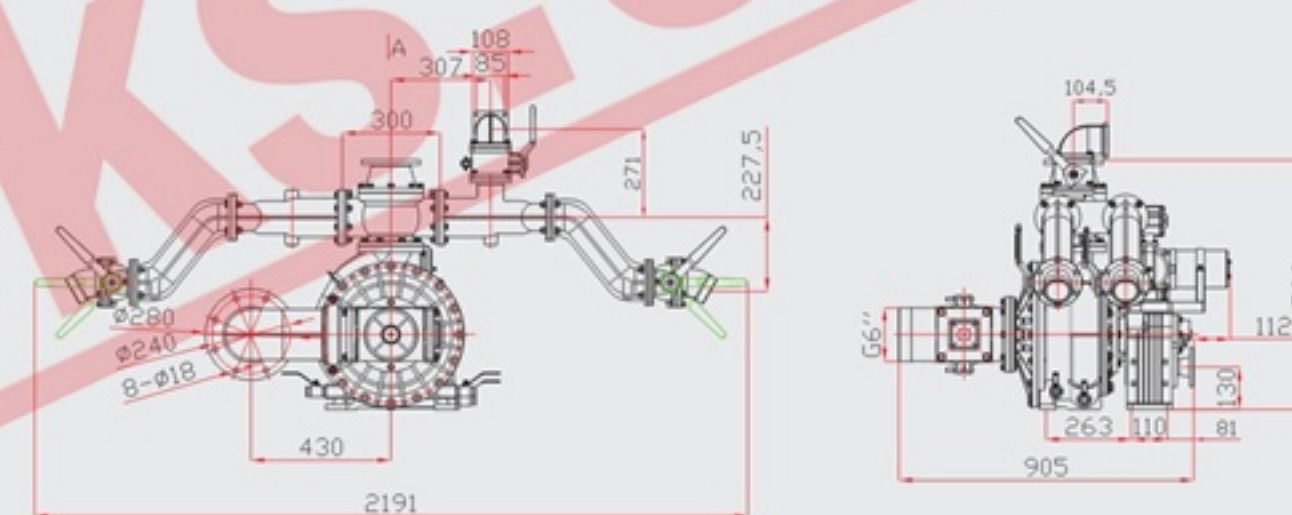


样式六 / Style six

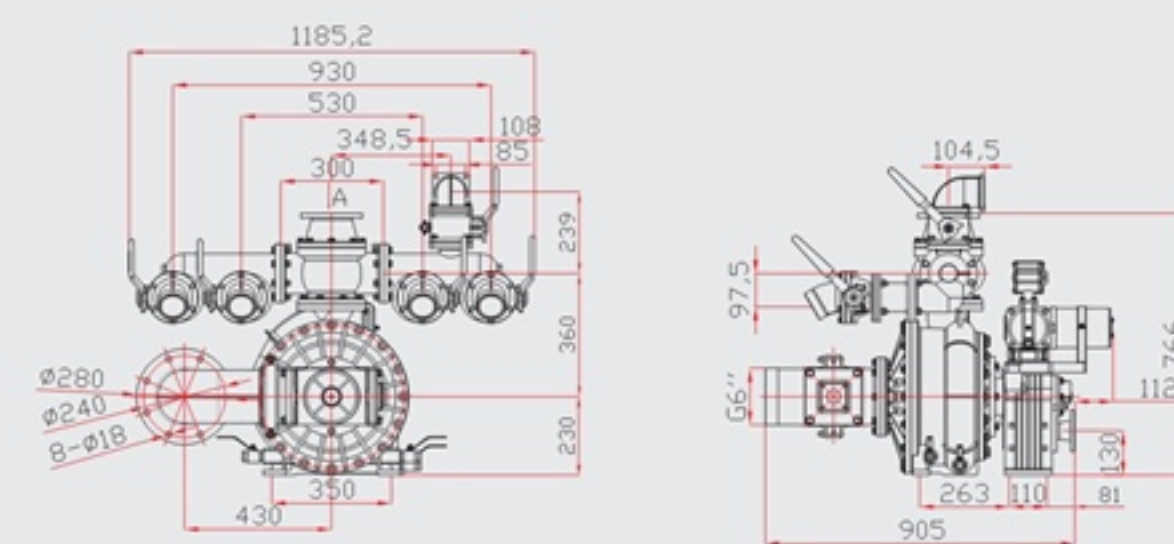


24

安装尺寸 / Installation dimension

联轴法兰安装尺寸

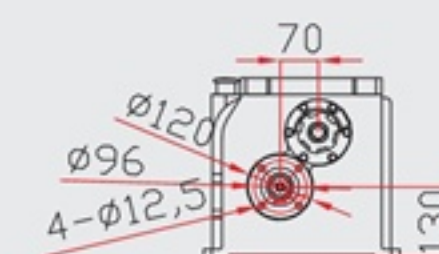

泵脚安装尺寸

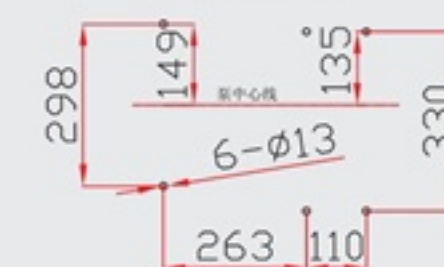

A向 (炮法兰)





CB10/100-XZ

车用消防泵 / Vehicle fire pump

CB10/100-XZ低压车用消防泵引进国外先进技术，是上海震旦消防器材公司转入我公司产品，我公司结合国内标准改制。该水泵采用双级导叶离心结构，转速低、稳定性高、质量可靠，引水采用电动四活塞。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.033、1.178、1.259、1.346、1.44、1.541、1.652、1.772。

CB10/100-XZ low-pressure vehicle fire pump incorporates advanced foreign technologies. It is a product transferred to us by Shanghai Zhendan Fire-fighting Equipment Co., Ltd. and modified by us in accordance with domestic standards. The pump adopts a two-stage guide vane centrifugal structure which is low in RPM, high in stability and quality. For water diversion, it uses an electric four-piston mechanism. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.033, 1.178, 1.259, 1.346, 1.44, 1.541, 1.652, 1.772.


产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	100	1.00	2179±50	167	3
2	70	1.30	2280±50	166	3
3	50	1.00	1978±50	115	7


CB10/100-XZ 安装尺寸图

CB10/100-XZ Installation Dimension Drawing


样式一 / Style one

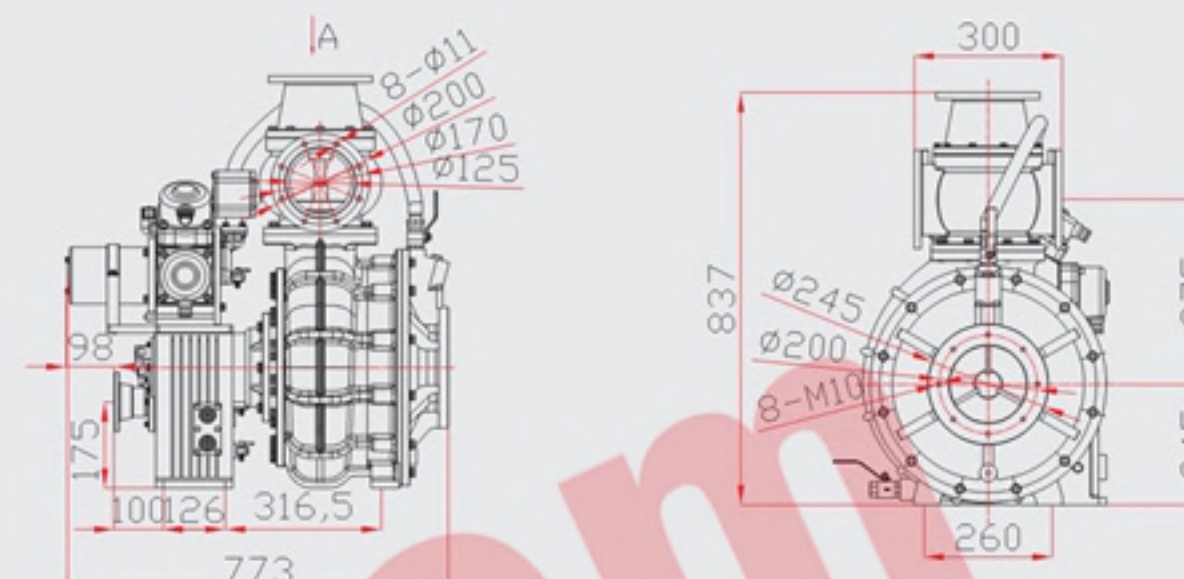

样式二 / Style two

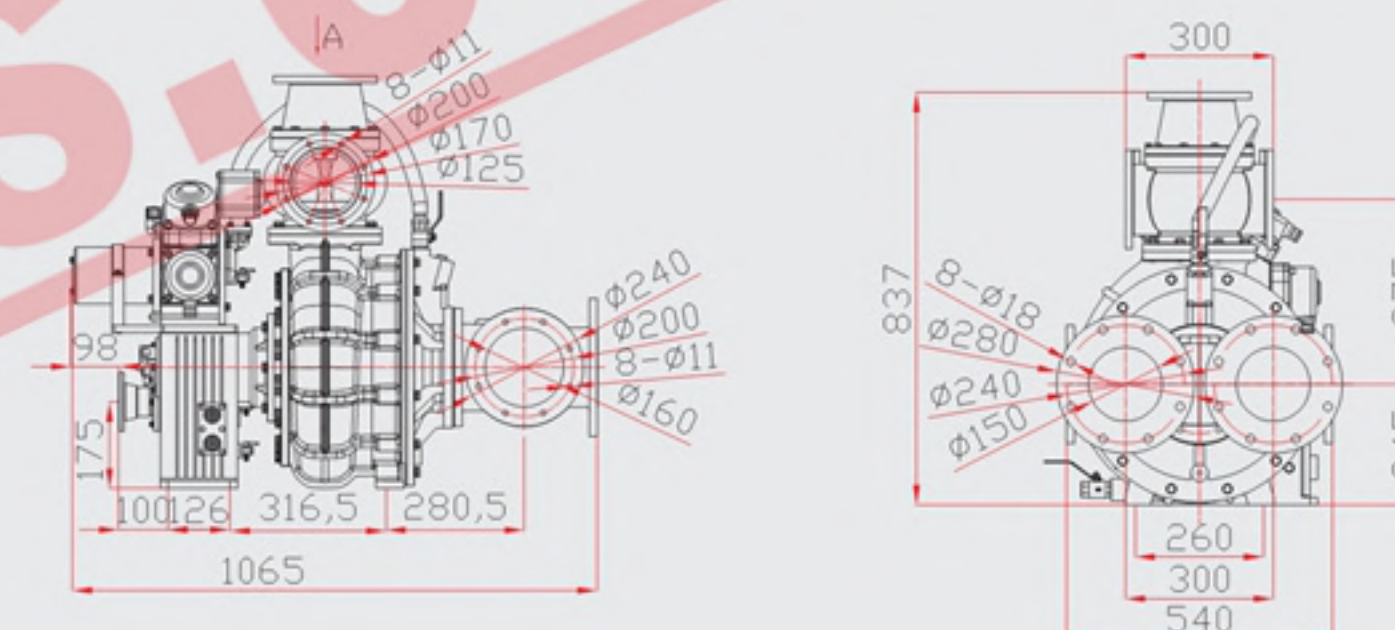

安装尺寸 / Installation dimension

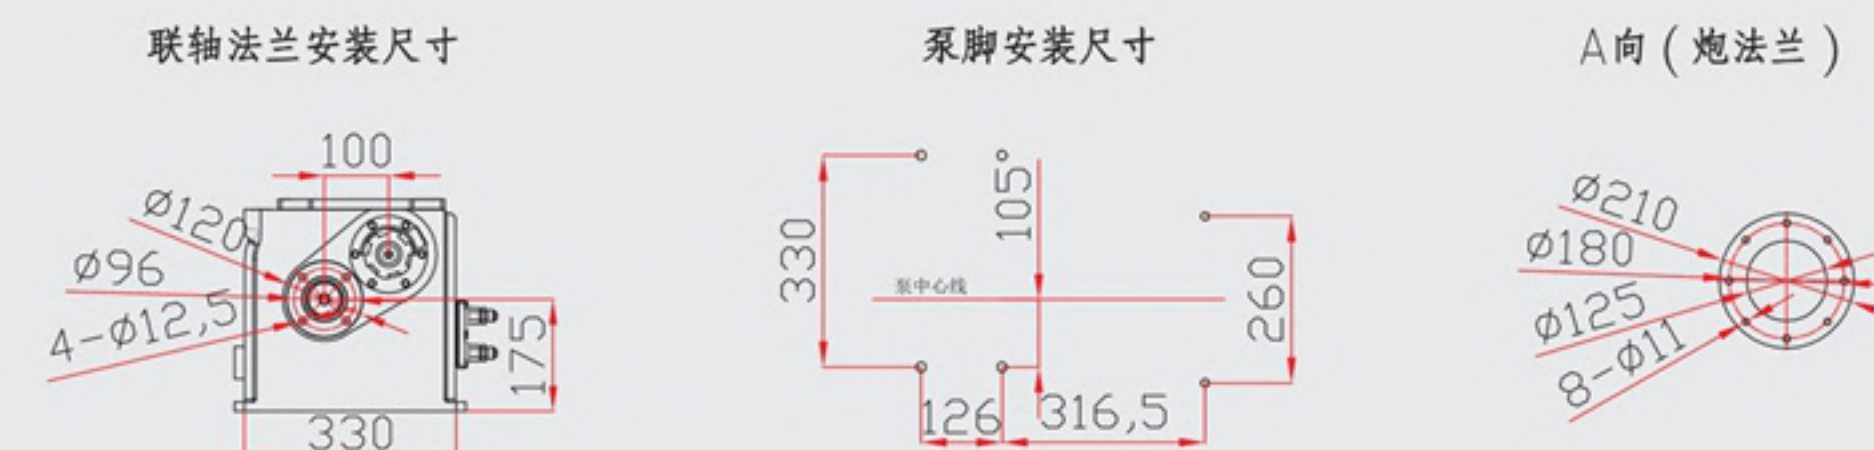



CB20•10/15•30-XZ

车用消防泵 / Vehicle fire pump

CB20•10/15•30-XZ中低压车用消防泵，中压和低压均采用泵壳导叶一体式结构，具有出水均衡、稳定、可靠等特点。可根据技术参数联用出水，中低压转换可选择手动或气动二种。该水泵是雄真设计的理想产品。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.033、1.178、1.259、1.346、1.44、1.541、1.652、1.772。

CB20•10/15•30-XZ medium-and-low pressure vehicle fire pump uses an pump-shell/ guide-vane integrated structure for both the medium and low pressure mode, which has the characteristics of balanced discharge, stable operation and high reliability. An outlet pipe can be used in combination according to the technical parameters, and the conversion between the medium and low pressure modes can be either manual or pneumatic. The pump is an ideal product designed by Xiongzhen, which has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.033, 1.178, 1.259, 1.346, 1.44, 1.541, 1.652, 1.772.




产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	30	1.00	3139±50	72	3
2	15	2.00	3263±50	86	3
3	15	1.00	3102±50	59	7
联用 Combination	低压 Low pressure	15	1.00	97	3
	中压 Medium pressure	10	2.00		


CB20•10/15•30-XZ 安装尺寸图

CB20•10/15•30-XZ Installation Dimension Drawing


样式一 / Style one

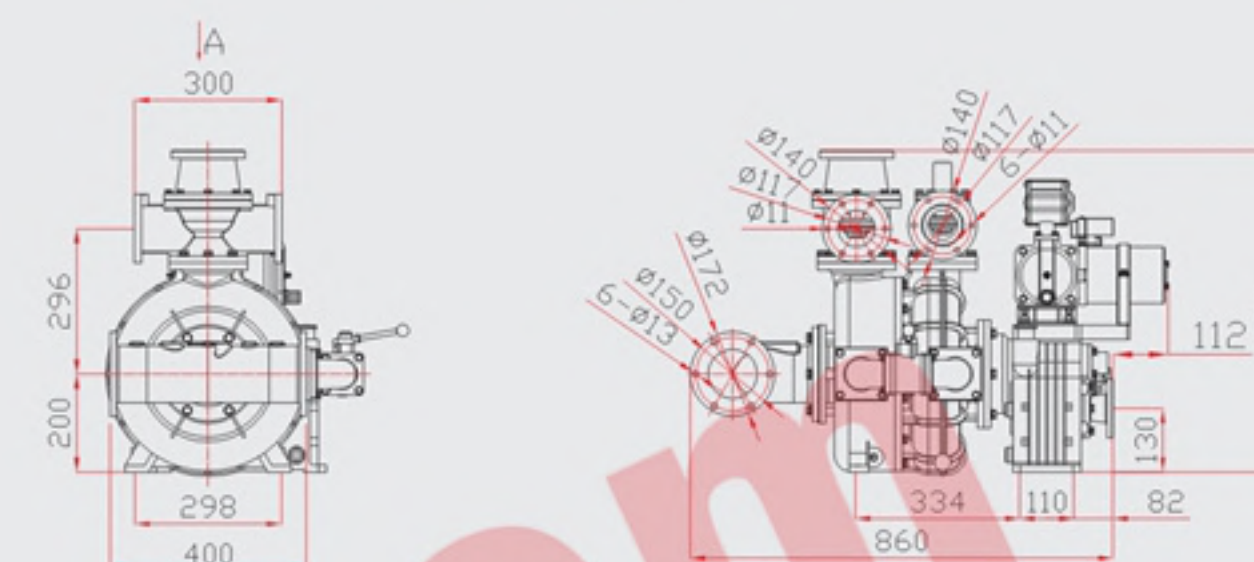

样式二 / Style two

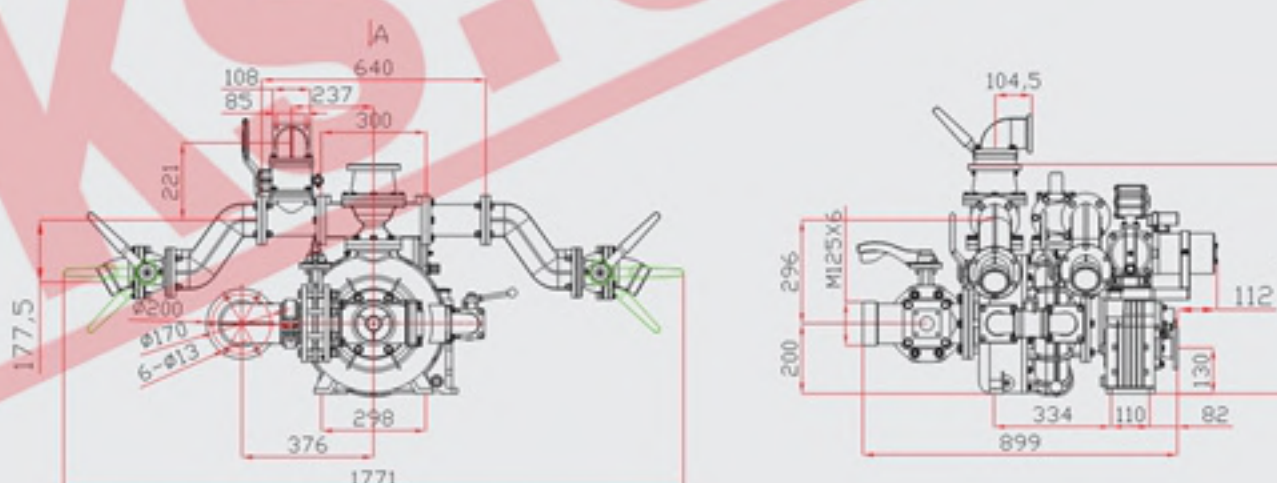


样式三 / Style three

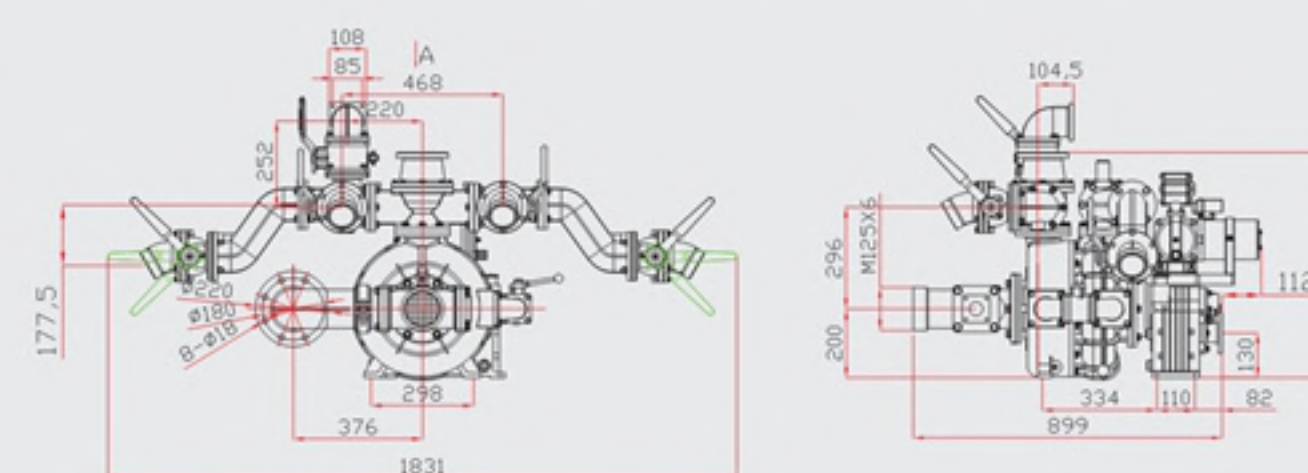

安装尺寸 / Installation dimension


联轴法兰安装尺寸

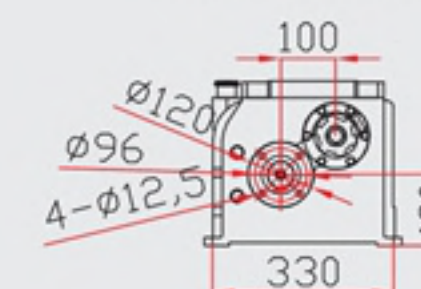

泵脚安装尺寸



A向 (炮法兰)

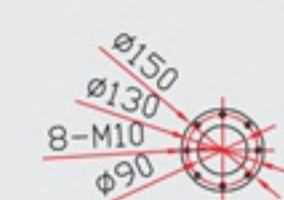

CB20•10/20•40-XZ

车用消防泵 / Vehicle fire pump

CB20•10/20•40-XZ中低压车用消防泵，活塞引水可选择电动或皮带轮驱动，进水管路和出水管路根据客户使用需求选择选择。中低压可同时使用或分低压和中压使用。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.033、1.178、1.259、1.346、1.44、1.541、1.652、1.772。

CB20•10/20•40-XZ medium-and-low pressure vehicle fire pump can choose between electric motor or pulley drive for piston diversion, and the inlet and outlet pipes can be selected according to customer demand and choice. Its medium and low pressure mode can be used simultaneously or individually. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.033, 1.178, 1.259, 1.346, 1.44, 1.541, 1.652, 1.772.




产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	40	1.00	3192±50	84	3
2	20	2.00	3302±50	97	3
3	20	1.00	3116±50	63	7
联用 Combination	低压 Low pressure	25	1.00	102	3
	中压 Medium pressure	15	2.00		


CB20•10/20•40-XZ 安装尺寸图

CB20•10/20•40-XZ Installation Dimension Drawing


样式一 / Style one

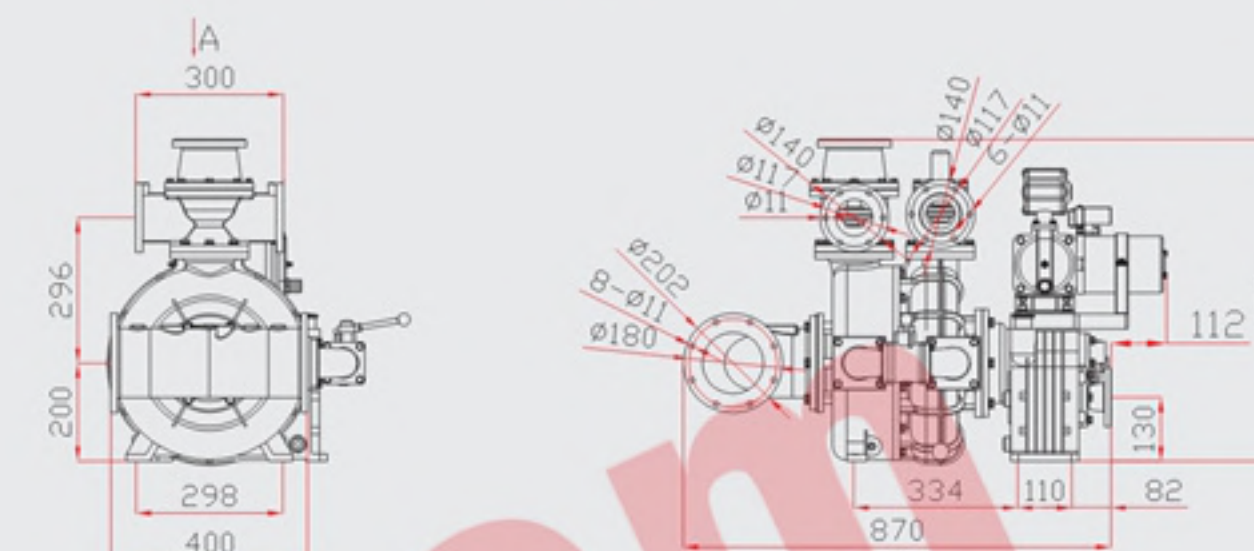

样式二 / Style two

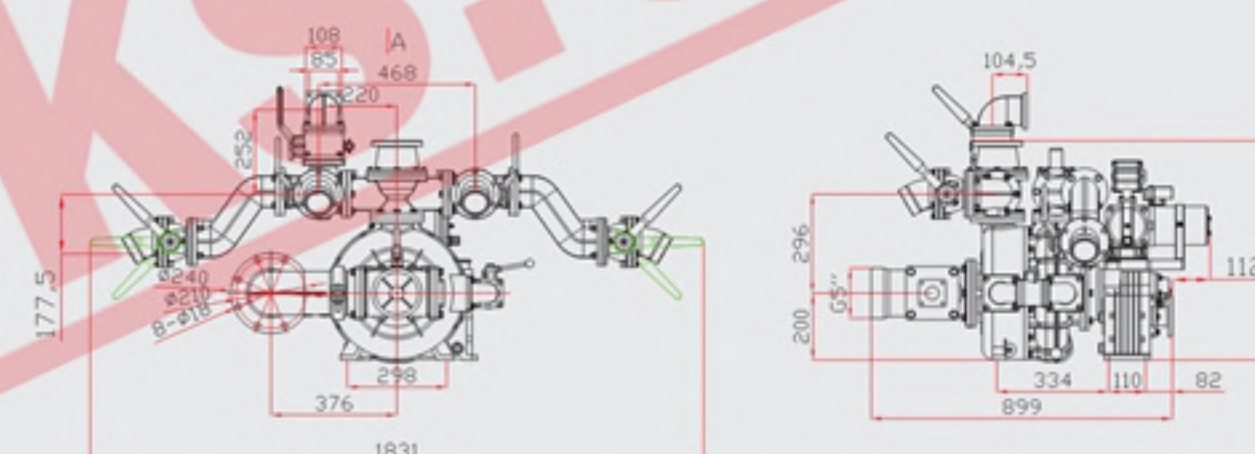


样式三 / Style three

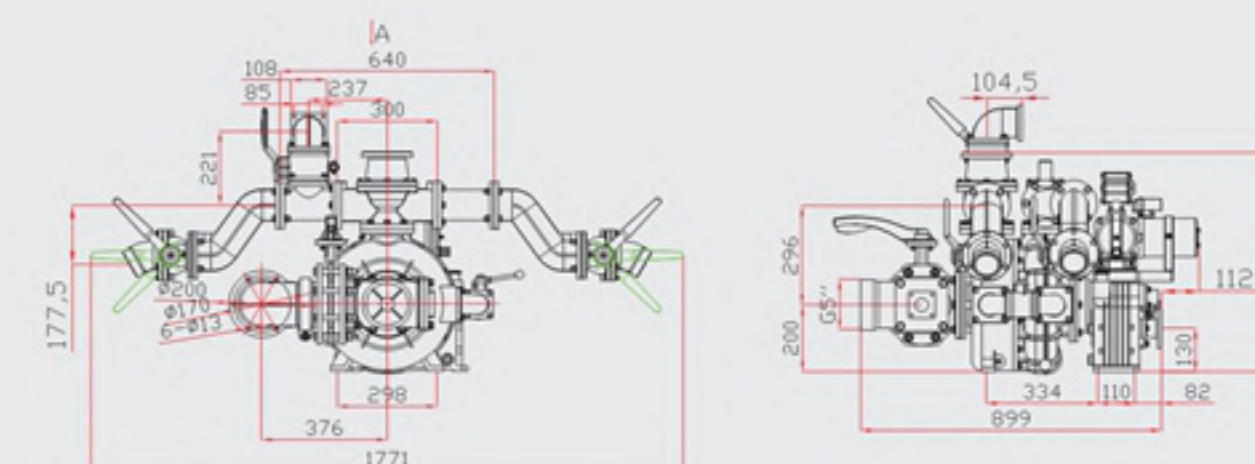

安装尺寸 / Installation dimension


联轴法兰安装尺寸

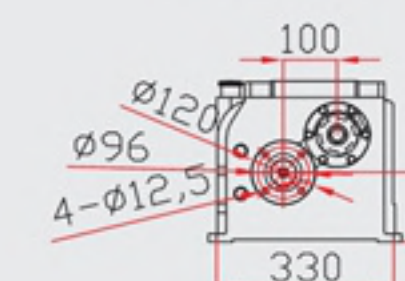

泵脚安装尺寸



A向 (炮法兰)

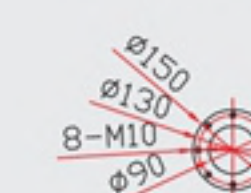

CB20•10/30•60-XZ

车用消防泵 / Vehicle fire pump

CB20•10/30•60-XZ中低压车用消防泵，可根据技术参数联用出水。活塞引水可选择电动和皮带轮驱动两种。泵采用低压止回阀，中压止回阀。在出水阀不关的情况下能引水。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.033、1.178、1.259、1.346、1.44、1.541、1.652、1.772。

CB20•10/30•60-XZ medium-and-low pressure vehicle fire pump can be used in combination with outlet pipes according to its technical parameters. Fir piston water diversion, it can choose between electric drive and pulley drive. The pump uses a low pressure check valve and a medium pressure check valve. It can divert water with the outlet valve open. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.033, 1.178, 1.259, 1.346, 1.44, 1.541, 1.652, 1.772.




产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	60	1.00	3251±50	113	3
2	30	2.00	3271±50	137	3
3	30	1.00	3090±50	80	7
联用 Combination	低压 Low pressure	35	1.00	135	3
	中压 Medium pressure	15	2.00		


CB20•10/30•60-XZ 安装尺寸图

CB20•10/30•60-XZ Installation Dimension Drawing


样式一 / Style one

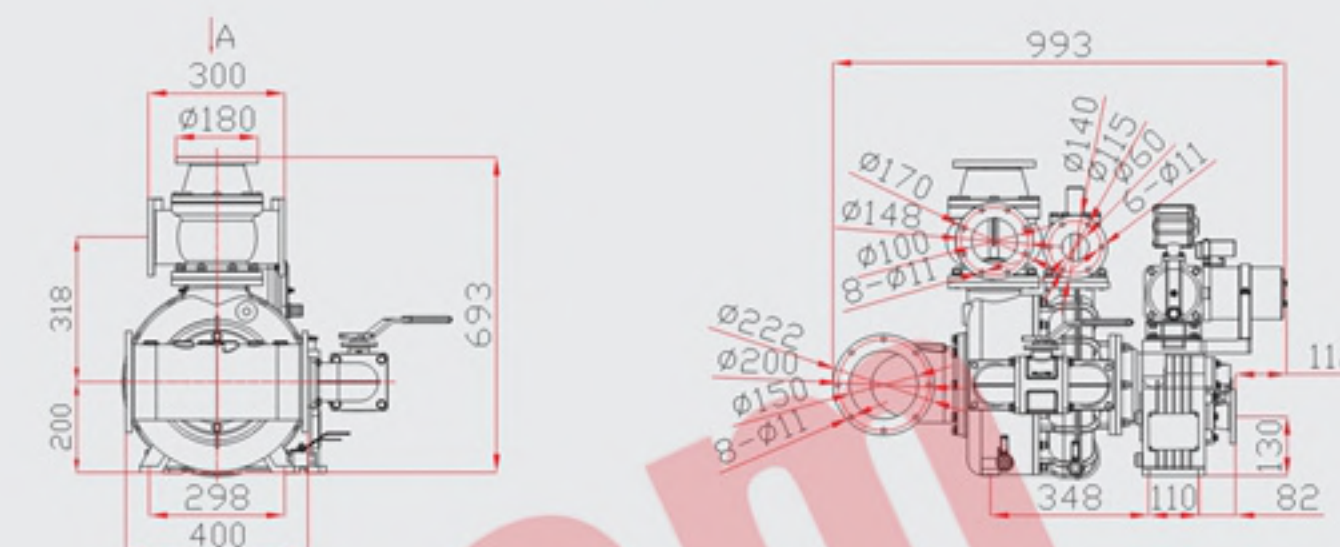

样式二 / Style two

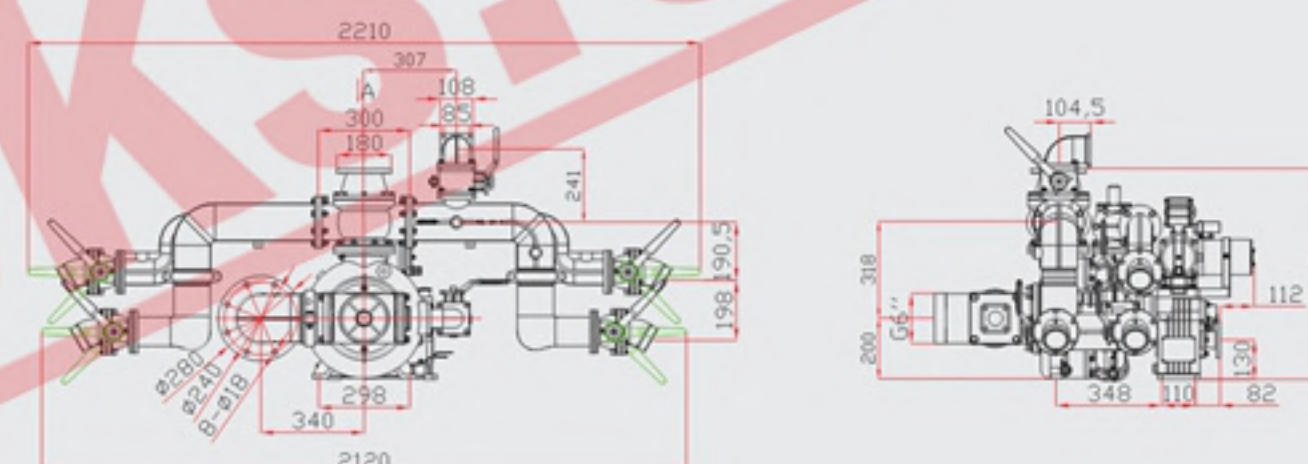


样式三 / Style three

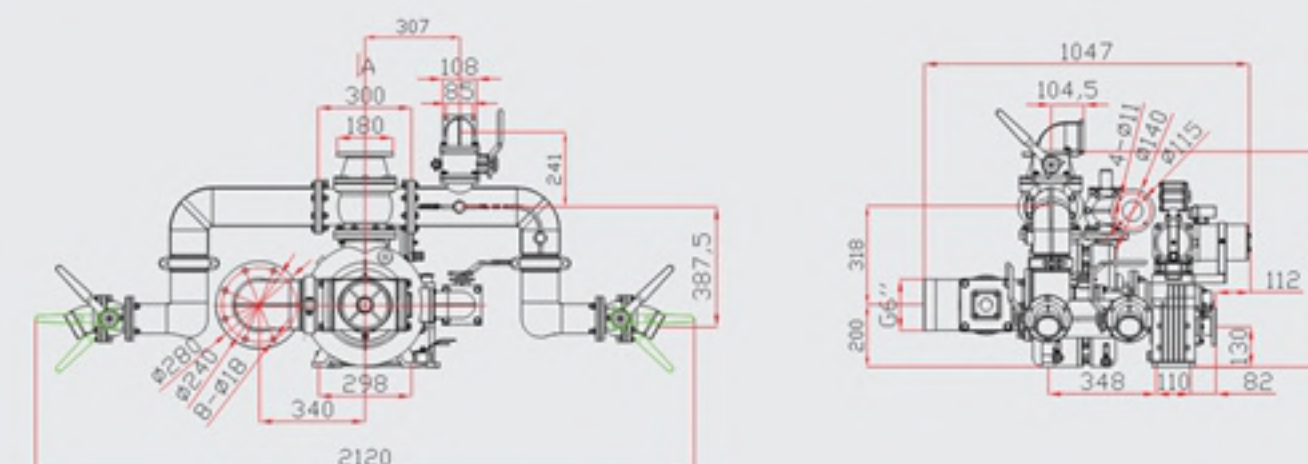


安装尺寸 / Installation dimension


联轴器法兰安装尺寸

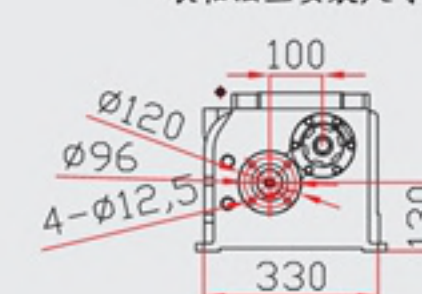


泵脚安装尺寸

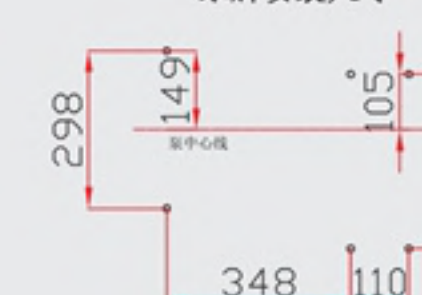

A向 (炮法兰)

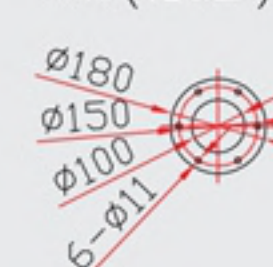

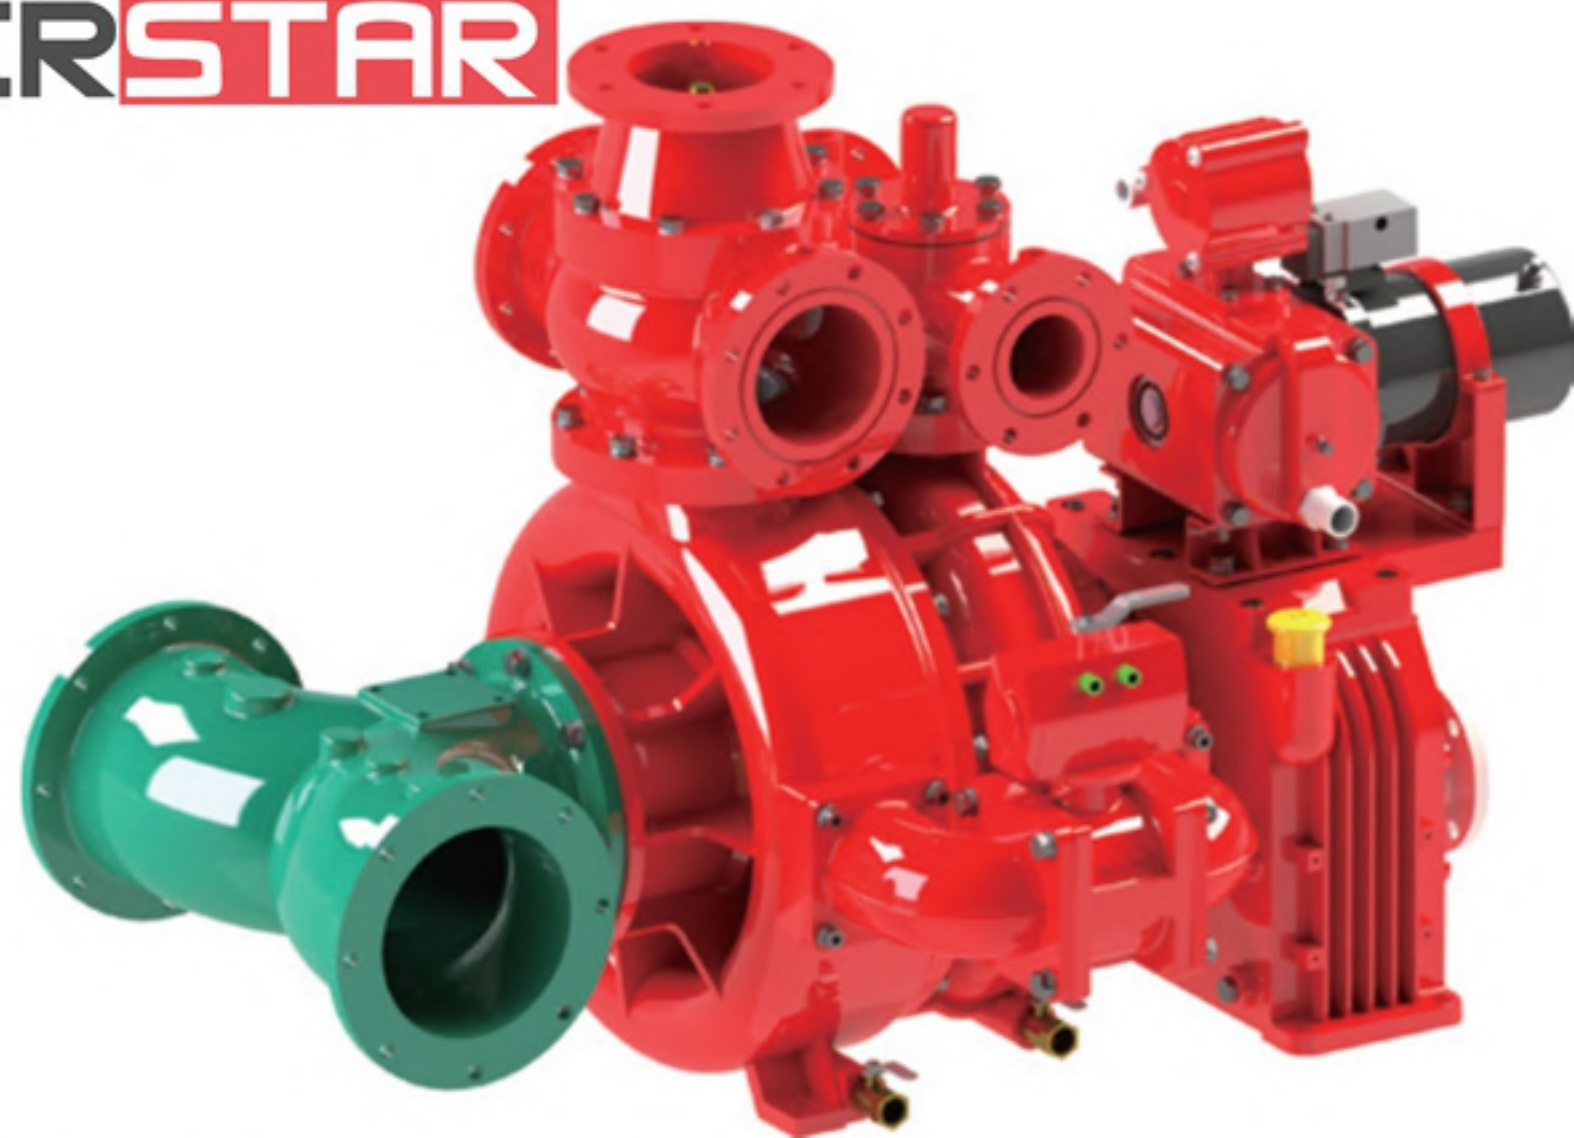

CB20•10/40•80-XZ

车用消防泵 / Vehicle fire pump

CB20•10/40•80-XZ中低压车用消防泵，泵采用导叶式离心结构，可靠耐用。可中低压联用也可分为低压和中压使用。中低压转换可选择气动或手动，进水管路和出水管路根据客户使用需求选择。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：1.033、1.178、1.259、1.346、1.44、1.541、1.652、1.772。

CB20•10/40•80-XZ medium-and-low pressure vehicle fire pump adopts the guide vane centrifugal structure, which is reliable and durable. It can be used for its medium and low pressure mode simultaneously or be divided into low pressure and medium pressure mode individually. The conversion between the medium and low pressure modes can be pneumatic or manual, and the inlet and outlet pipes can be selected according to customer demand. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.033, 1.178, 1.259, 1.346, 1.44, 1.541, 1.652, 1.772.




产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	80	1.00	3574±50	158	3
2	40	2.00	3439±50	155	3
3	40	1.00	3057±50	78	7
联用 Combination	低压 Low pressure	45	1.00	145	3
	中压 Medium pressure	20	2.00		


CB20•10/40•80-XZ 安装尺寸图

CB20•10/40•80-XZ Installation Dimension Drawing


样式一 / Style one

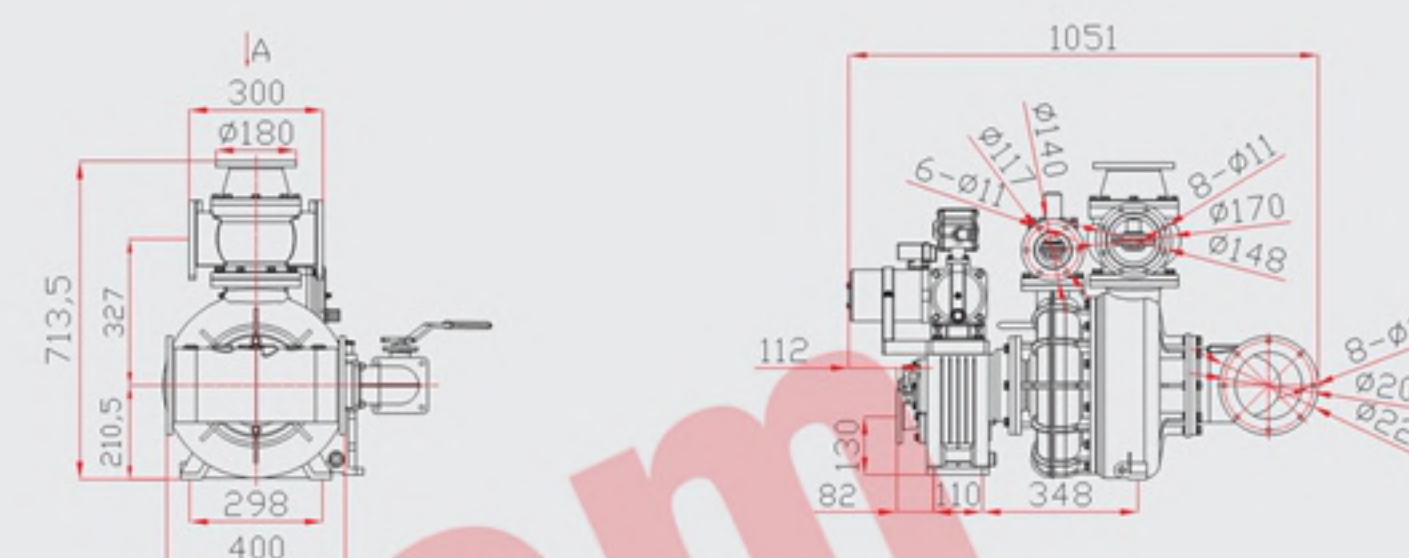

样式二 / Style two

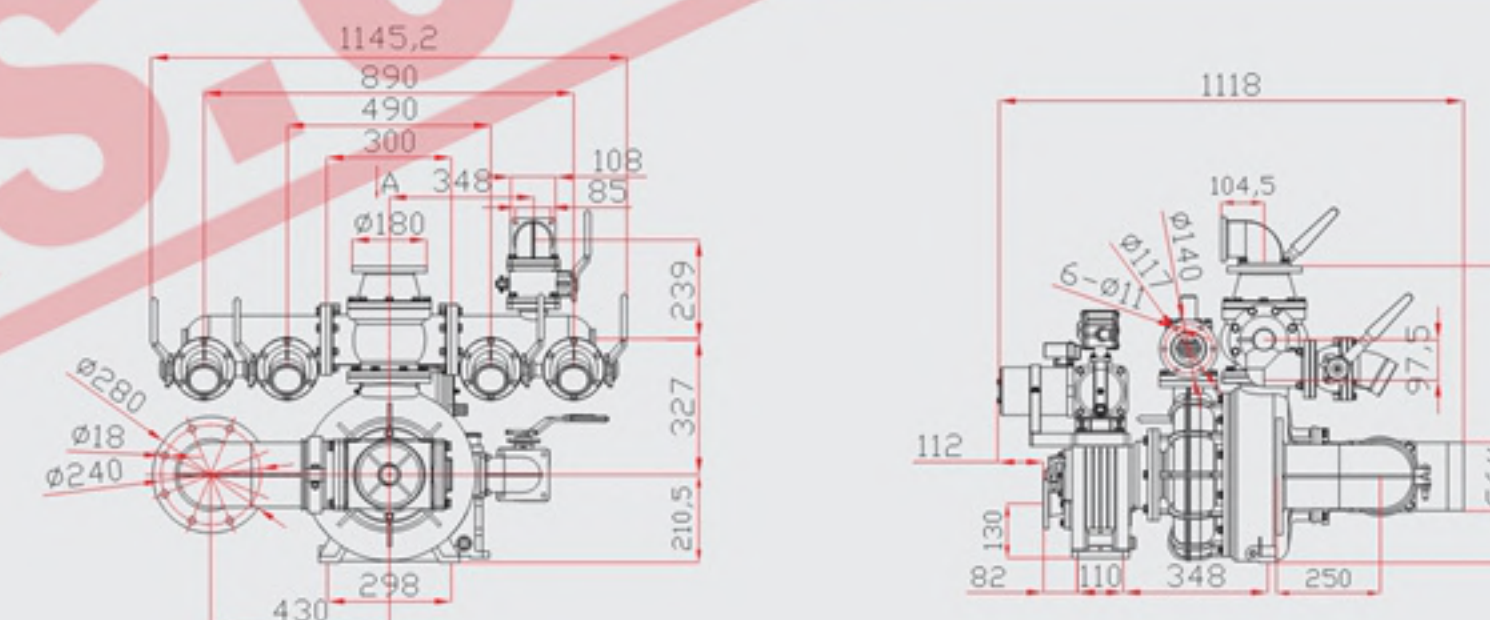


样式三 / Style three

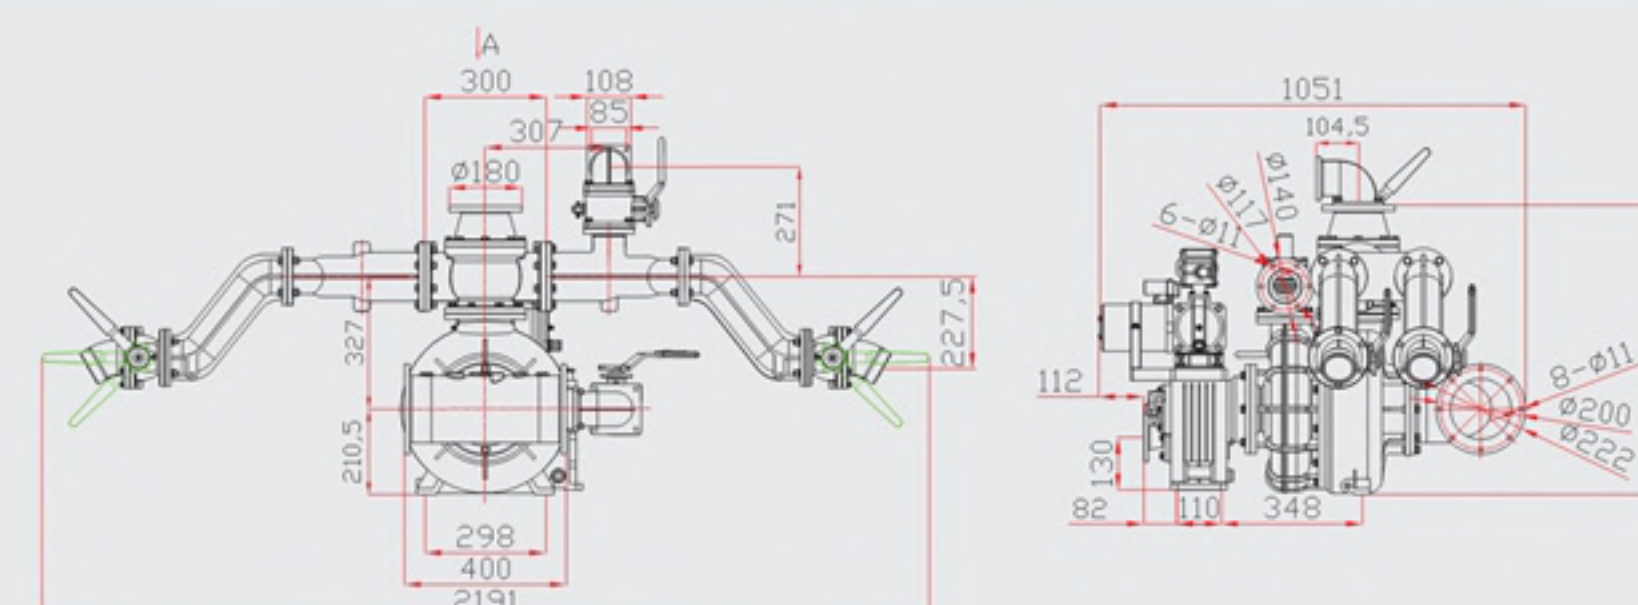

CB20•10/40•80-XZ 安装尺寸图


CB20•10/40•80-XZ Installation Dimension Drawing

样式四 / Style four

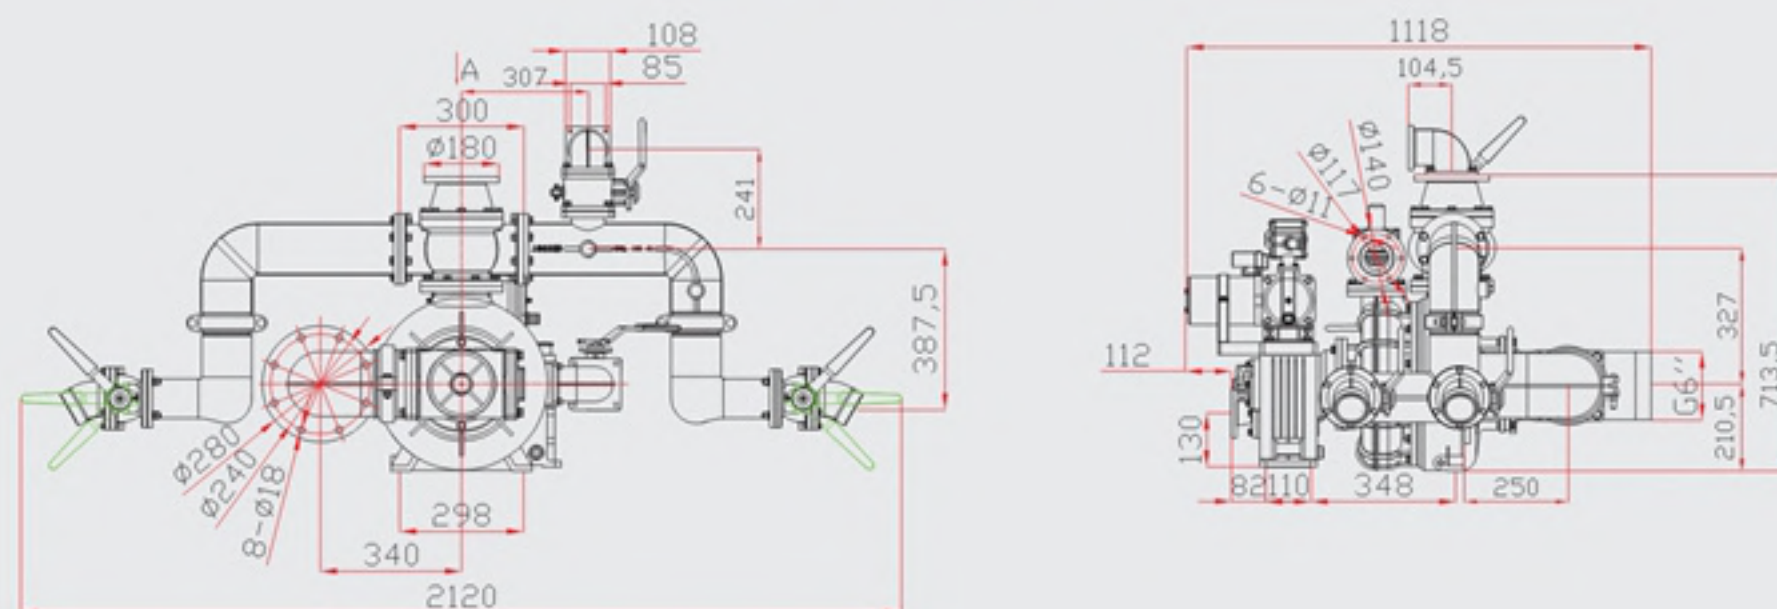


安装尺寸 / Installation dimension

联轴法兰安装尺寸

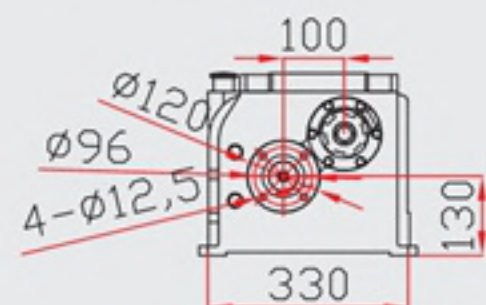

泵脚安装尺寸

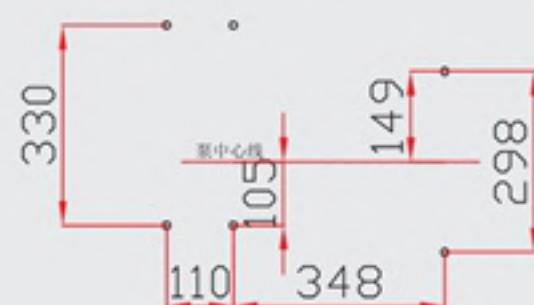

A向 (炮法兰)



CB40•10/7•50-XZ

车用消防泵 / Vehicle fire pump

CB40•10/7•50-XZ高低压车用消防泵, 采用国内外先进技术, 自主研发设计生产, 产品性能优良、结构紧凑、操作简单、维护方便。产品通过国家3C认证, 经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比: 1.033、1.178、1.259、1.346、1.44、1.541、1.652、1.772。

CB40•10/7•50-XZ high-and-low pressure vehicle fire pump adopts advanced domestic and foreign technologies and is independently designed, developed and manufactured. The product has excellent performance and compact structure, and is easy to operate and convenient to maintain. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.033, 1.178, 1.259, 1.346, 1.44, 1.541, 1.652, 1.772.


产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	50	1.00	3170±50	78	3
2	7	4.00	3500±50	122	3
3	20	1.00	3100±50	60	7
联用 Combination	低压 Low pressure	20	3550±50	135	3
	中压 Medium pressure	7			


CB40•10/7•50-XZ 安装尺寸图

CB40•10/7•50-XZ Installation Dimension Drawing


样式一 / Style one

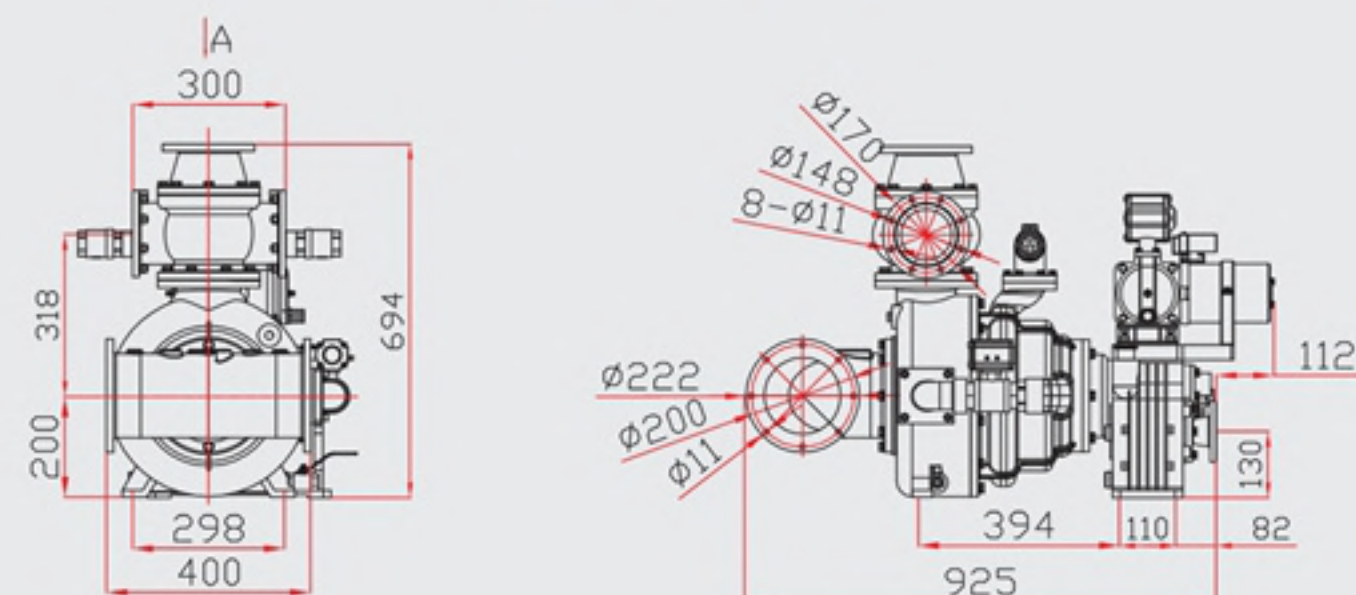


样式二 / Style two

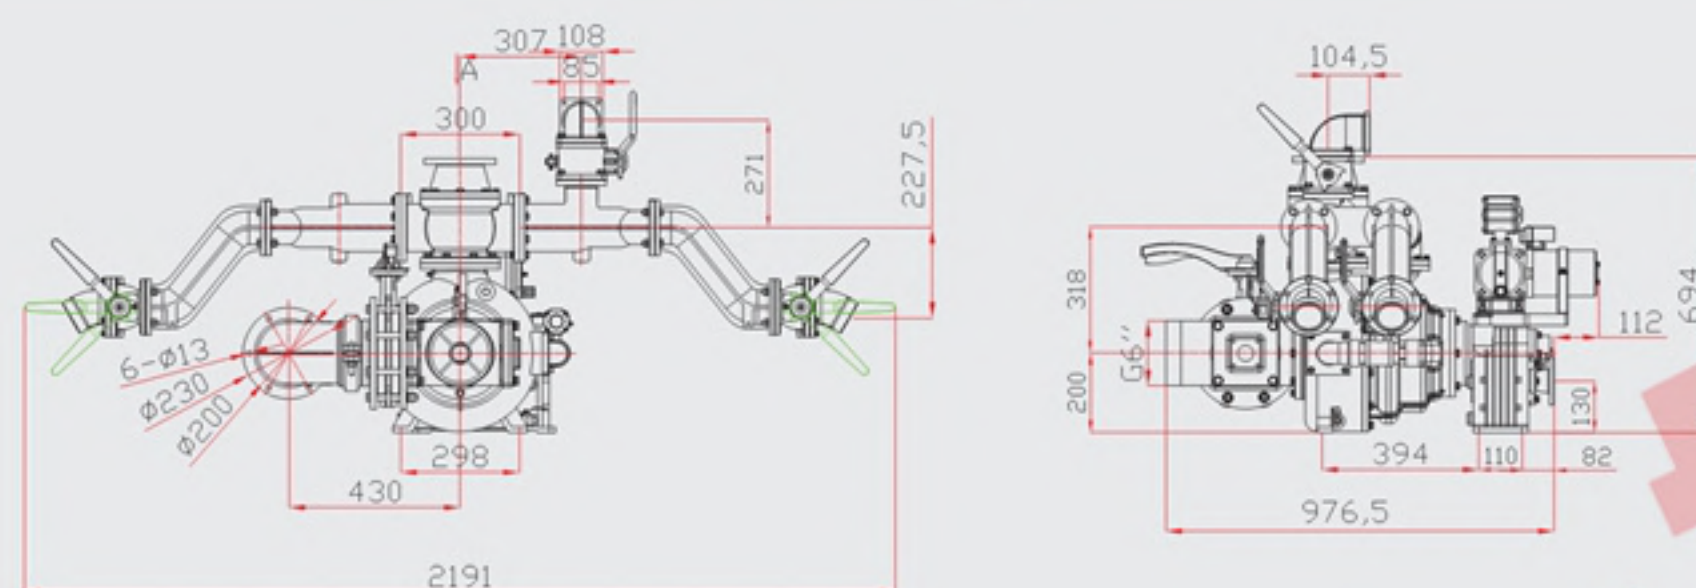

样式三 / Style three

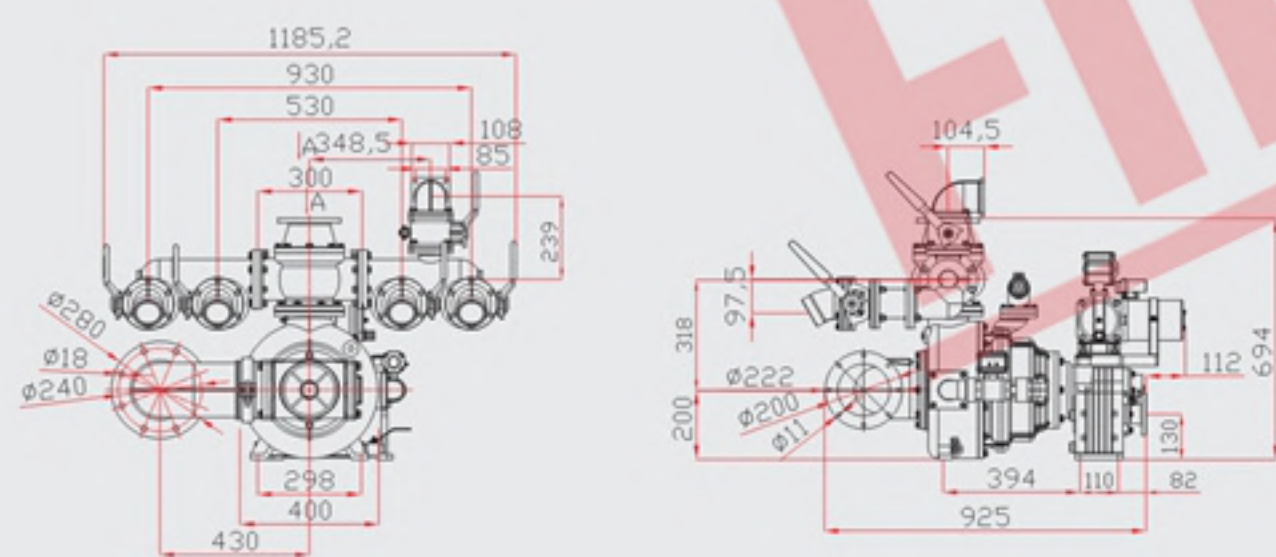

安装尺寸 / Installation dimension

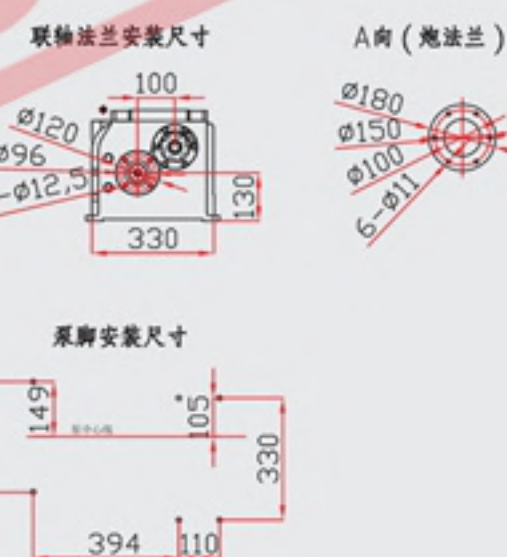

CB20/15-XZ

车用消防泵 / Vehicle fire pump

CB20/15-XZ中压车用消防泵采用双级叶轮泵壳导叶一体式结构,采用两活塞引水装置,泵转动时带动引水装置,满足压力后引水装置自动脱离。产品性能优良、结构紧凑、操作简单、维护方便。产品通过国家3C认证,经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比: 1.069、1.143、1.222、1.307、1.4、1.5。

The CB20/15-XZ medium pressure vehicle fire pump contains a two-stage guide vane and is of the pump-shell/ guide-vane integrated structure. It adopts a two-piston water diversion device. When the pump rotates, it drives the diversion device which will automatically disengage when the pressure requirement is met. The product has the characteristics of high performance, compact structure, easy operation and convenient maintenance. It has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.069, 1.143, 1.222, 1.307, 1.4, 1.5.


产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	30	1.00	2360±50	49	3
2	21	1.30	2502±50	49	3
3	15	1.00	2243±50	32	7
4	15	2.00	2850±50	68	3


CB20/15-XZ 安装尺寸图

CB20/15-XZ Installation Dimension Drawing

样式一 / Style one

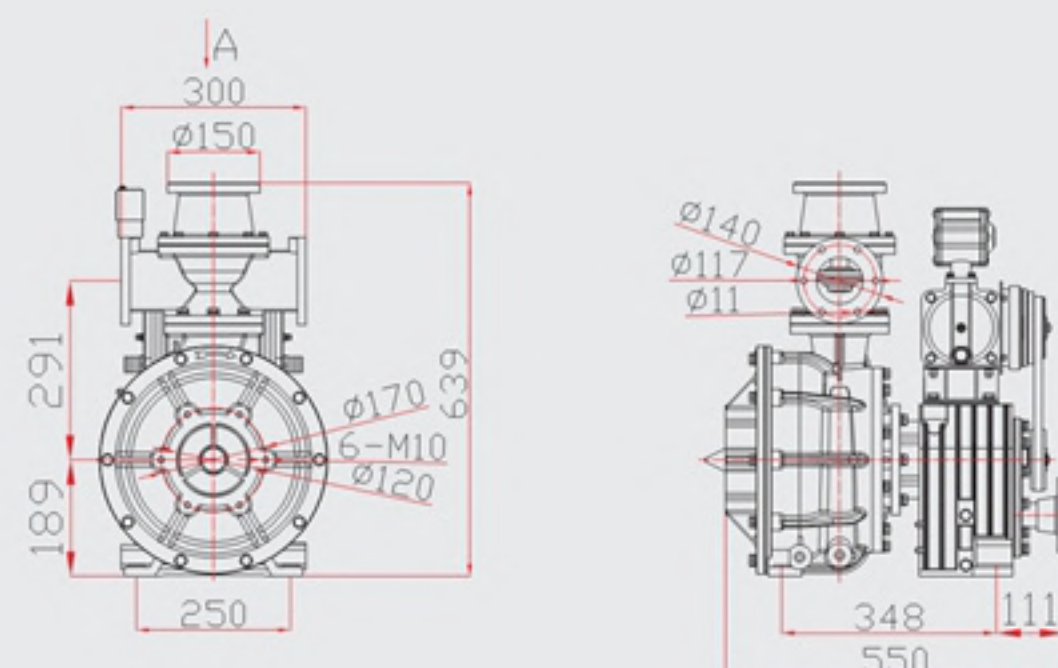


样式二 / Style two

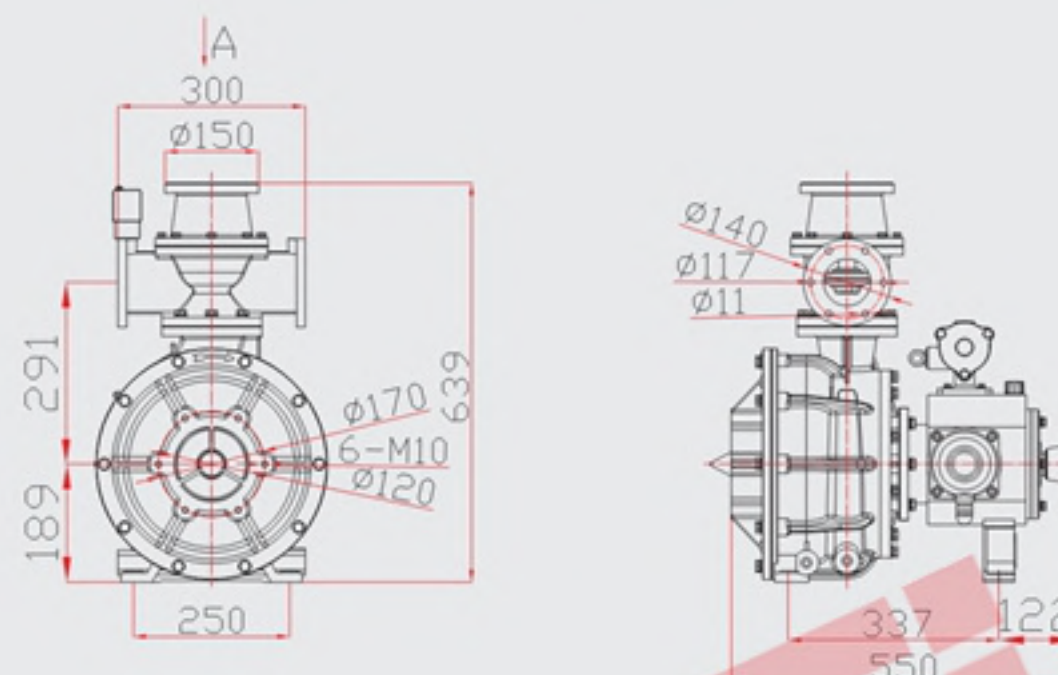


安装尺寸 / Installation dimension


齿轮箱泵脚安装尺寸

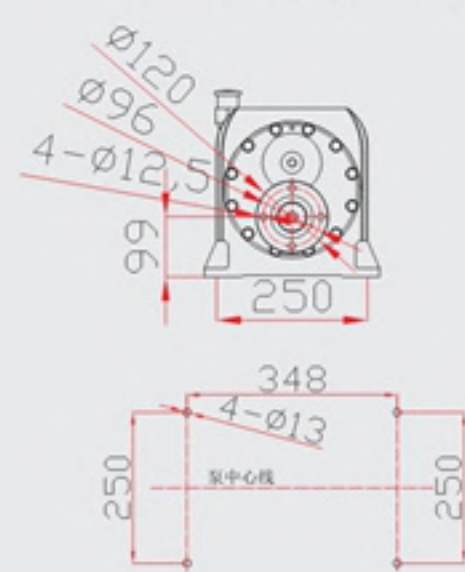

DCF轴承箱泵脚安装尺寸

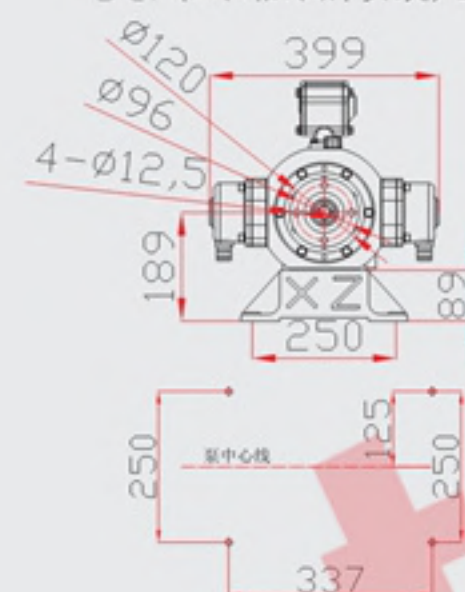

A向 (炮法兰)

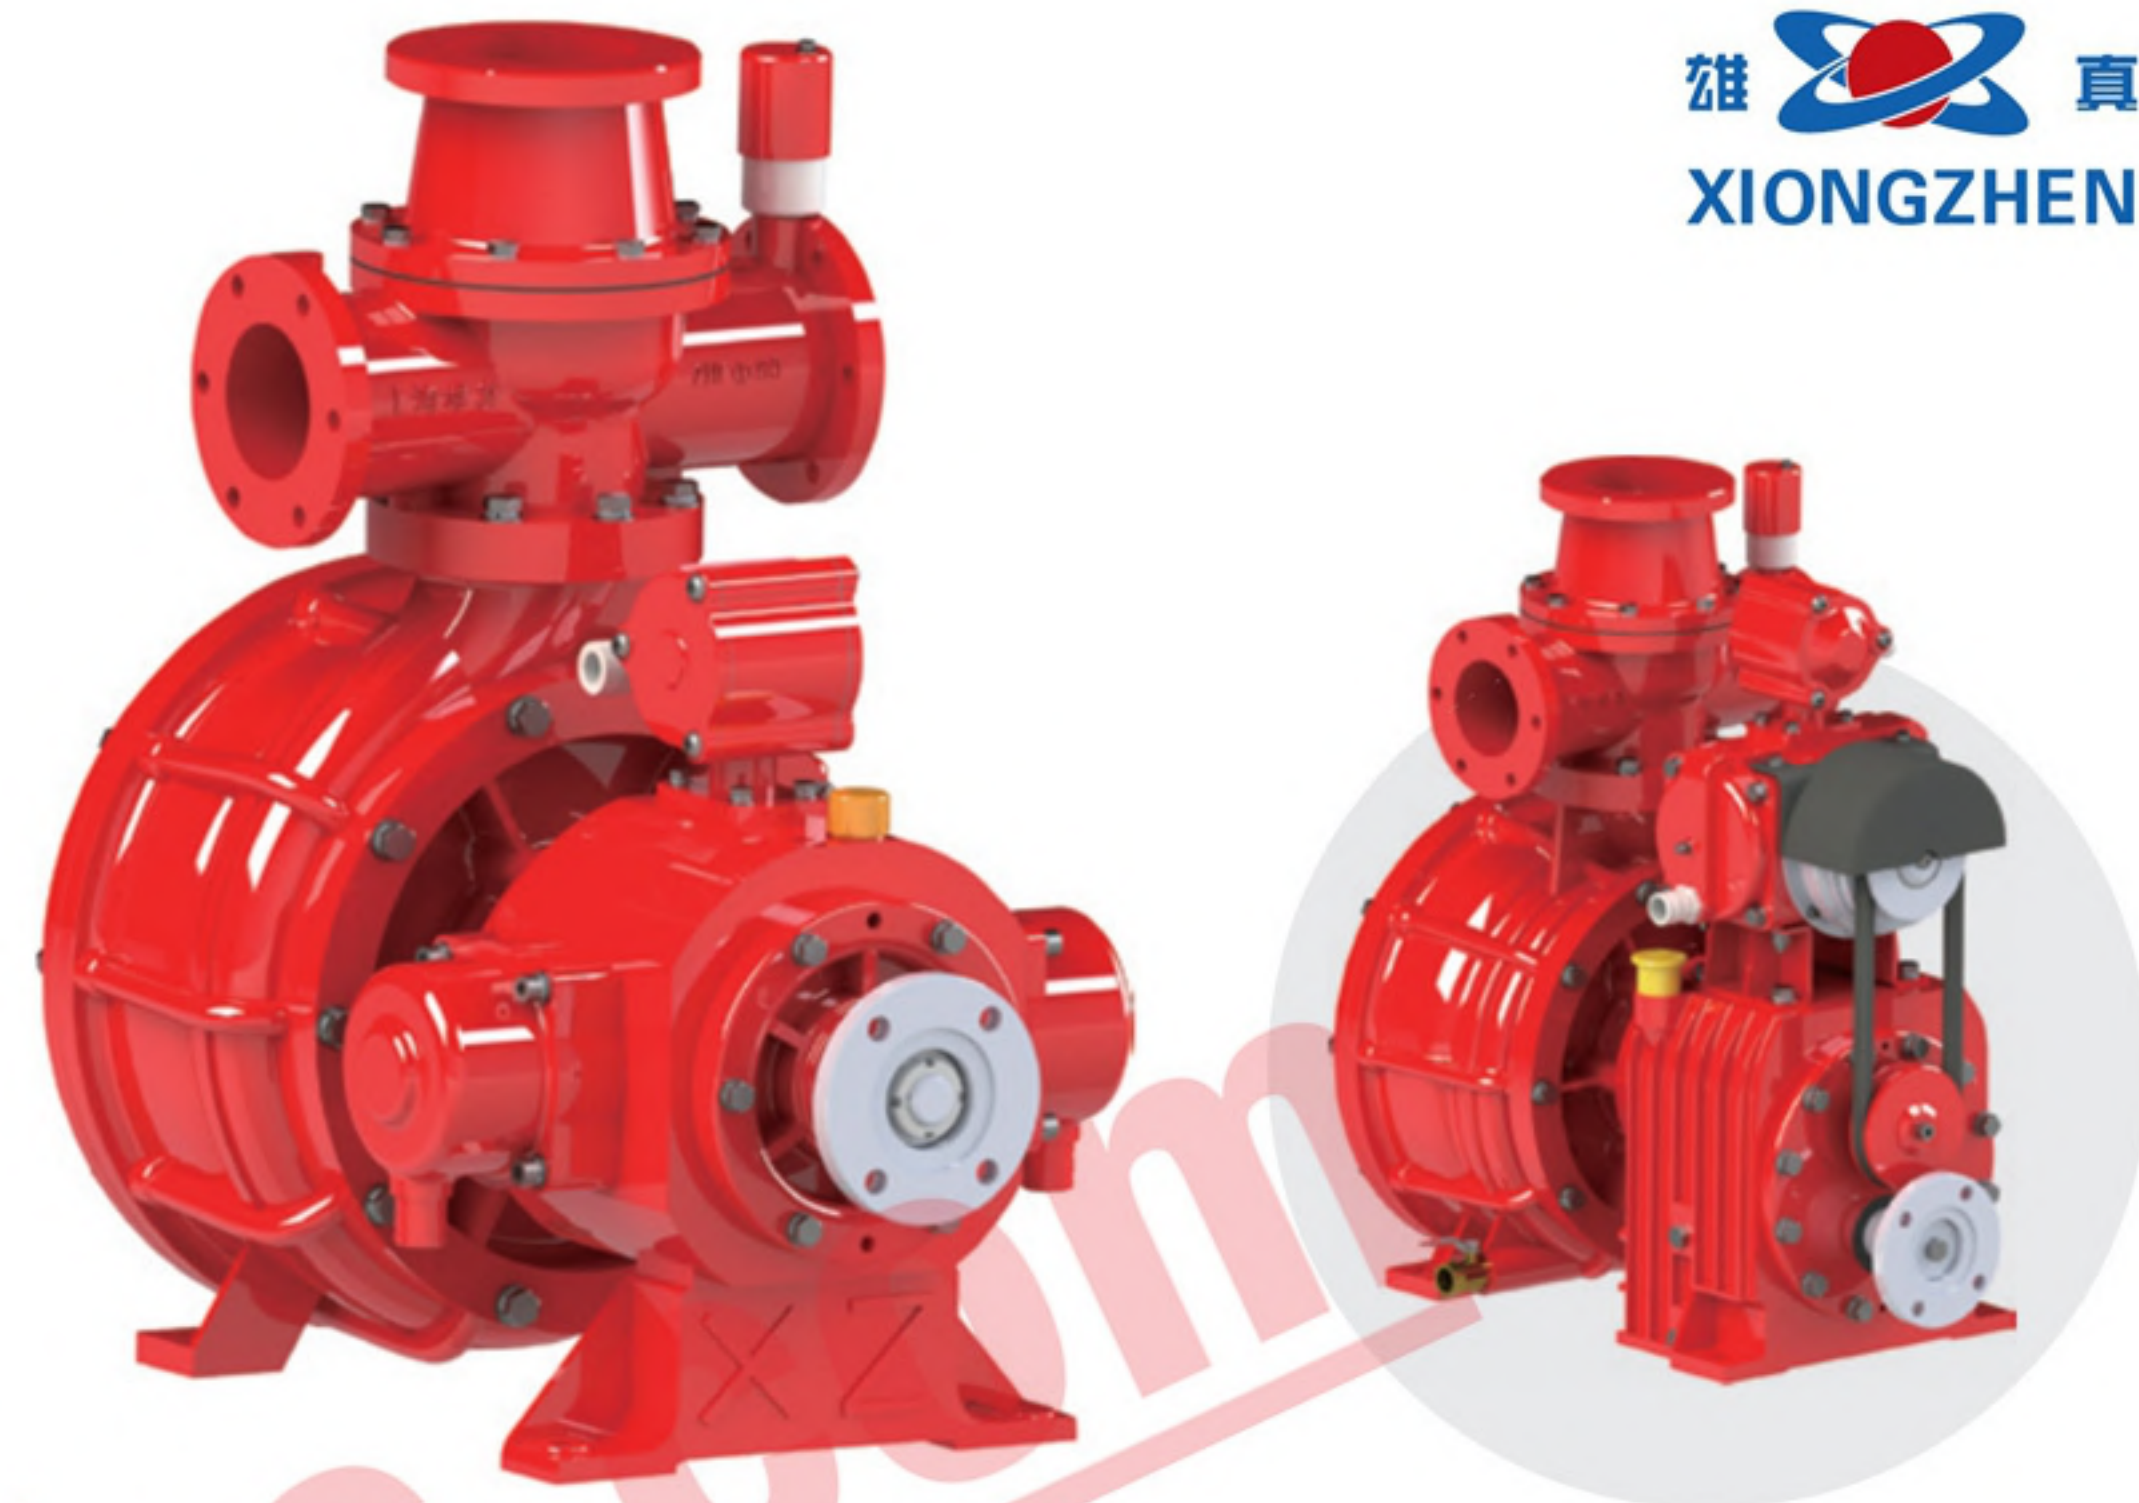

CB20/20-XZ

车用消防泵 / Vehicle fire pump

CB20/20-XZ中压车用消防泵采用双级叶轮泵壳导叶一体式结构,采用两活塞引水装置,泵转动时带动引水装置,满足压力后引水装置自动脱离。产品性能优良、结构紧凑、操作简单、维护方便。产品通过国家3C认证,经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比: 1.069、1.143、1.222、1.307、1.4、1.5。

The CB20/20-XZ medium pressure vehicle fire pump contains a two-stage guide vane and is of the pump-shell/ guide-vane integrated structure. It adopts a two-piston water diversion device. When the pump rotates, it drives the diversion device which will automatically disengage when the pressure requirement is met. The product has the characteristics of high performance, compact structure, easy operation and convenient maintenance. It has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.069, 1.143, 1.222, 1.307, 1.4, 1.5.


产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	20	2.0	2988±50	76	3
2	28	1.3	2568±50	60	3
3	40	1.0	2506±50	67	3
4	20	1.0	2246±50	35	7


CB20/20-XZ 安装尺寸图

CB20/20-XZ Installation Dimension Drawing

样式一 / Style one

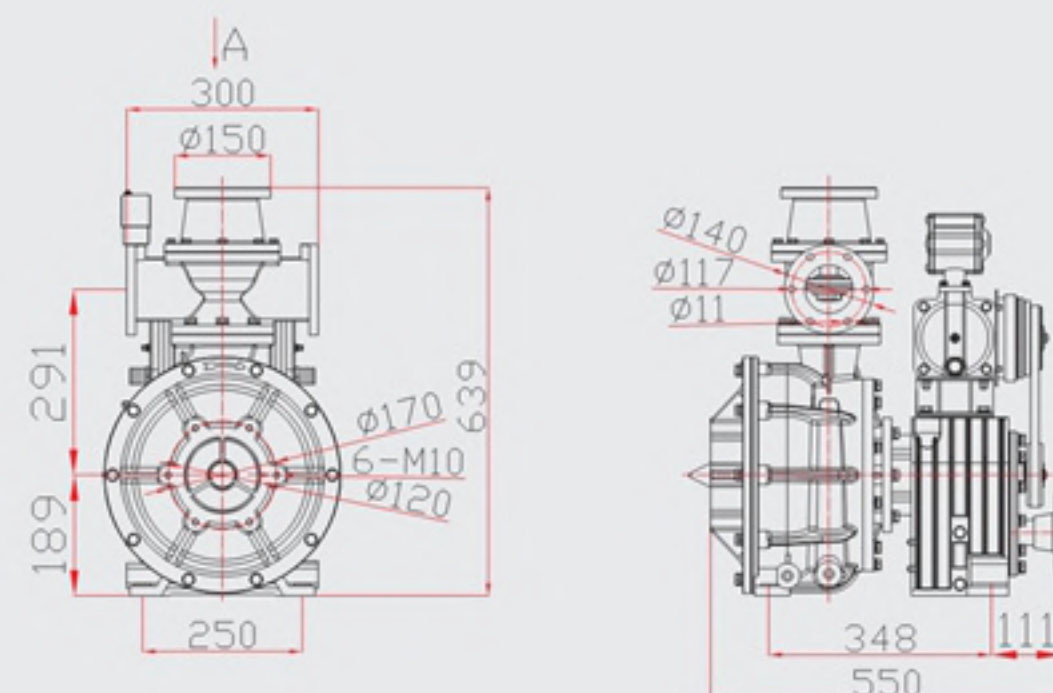


样式二 / Style two

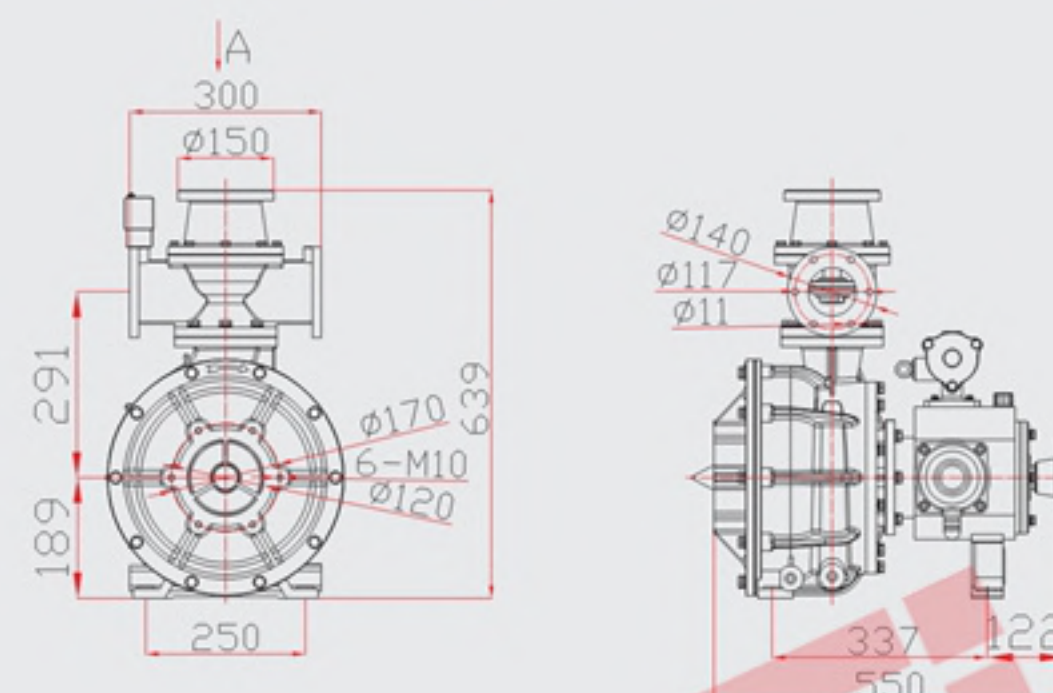


安装尺寸 / Installation dimension

齿轮箱泵脚安装尺寸

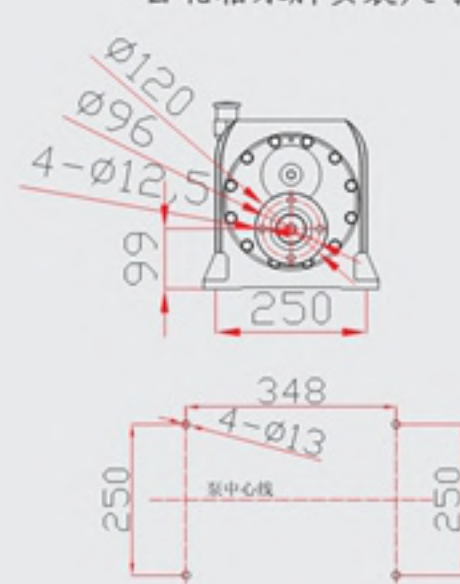

DCF轴承箱泵脚安装尺寸

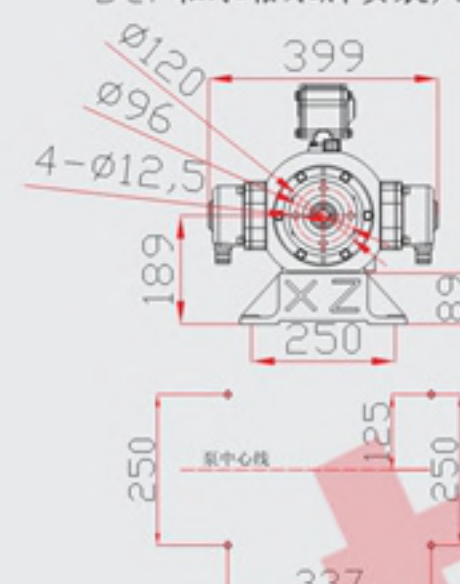

A向 (炮法兰)



CB20/30-XZ


车用消防泵 / Vehicle fire pump

CB20/30-XZ中压车用消防泵结构采用双级叶轮泵壳导叶一体式结构,采用两活塞引水装置,泵转动时带动引水装置,满足压力后引水装置自动脱离。产品性能优良、结构紧凑、操作简单、维护方便。产品通过国家3C认证,经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比: 1.033、1.178、1.259、1.346、1.44、1.541、1.652、1.772。

The CB20/30-XZ medium pressure vehicle fire pump contains a two-stage guide vane and is of the pump-shell/ guide-vane integrated structure. It adopts a two-piston water diversion device. When the pump rotates, it drives the diversion device which will automatically disengage when the pressure requirement is met. The product has the characteristics of high performance, compact structure, easy operation and convenient maintenance. It has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 1.033, 1.178, 1.259, 1.346, 1.44, 1.541, 1.652, 1.772.

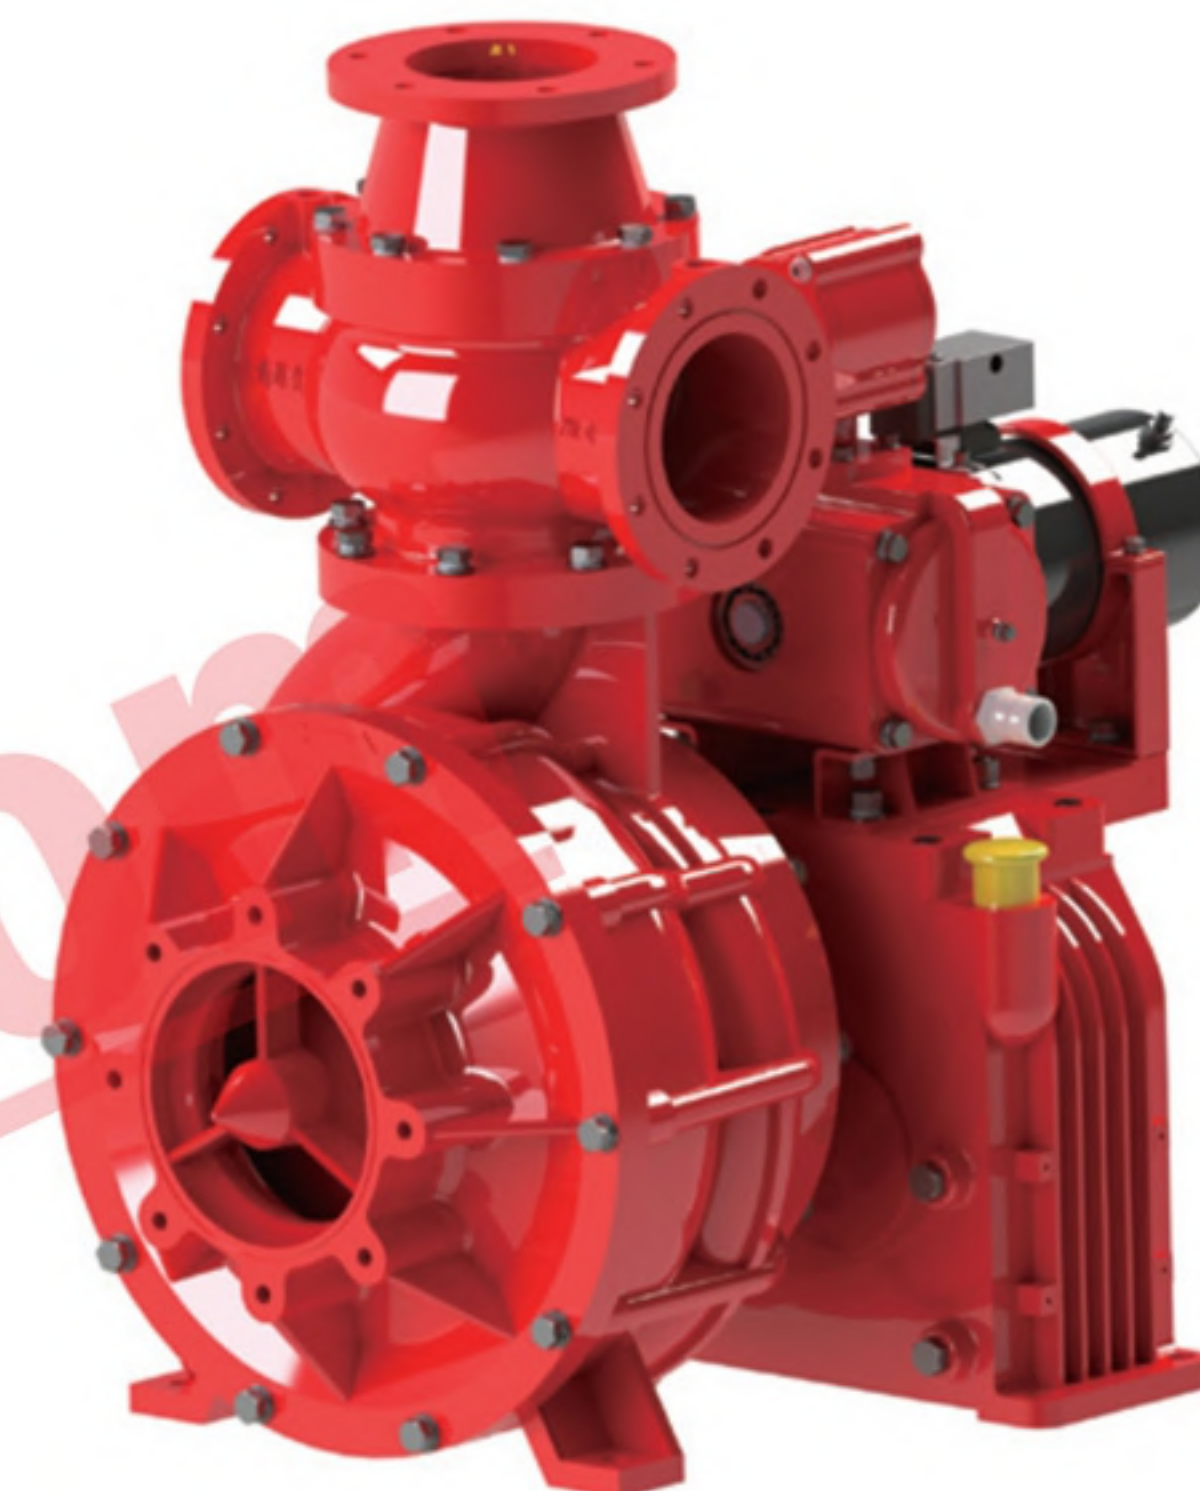


产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	60	1.0	2900±50	98	3
2	42	1.3	3250±50	106	3
3	30	1.0	2950±50	72	7
4	30	2.0	3150±51	116	3



CB20/30-XZ 安装尺寸图

CB20/30-XZ Installation Dimension Drawing

样式一 / Style one

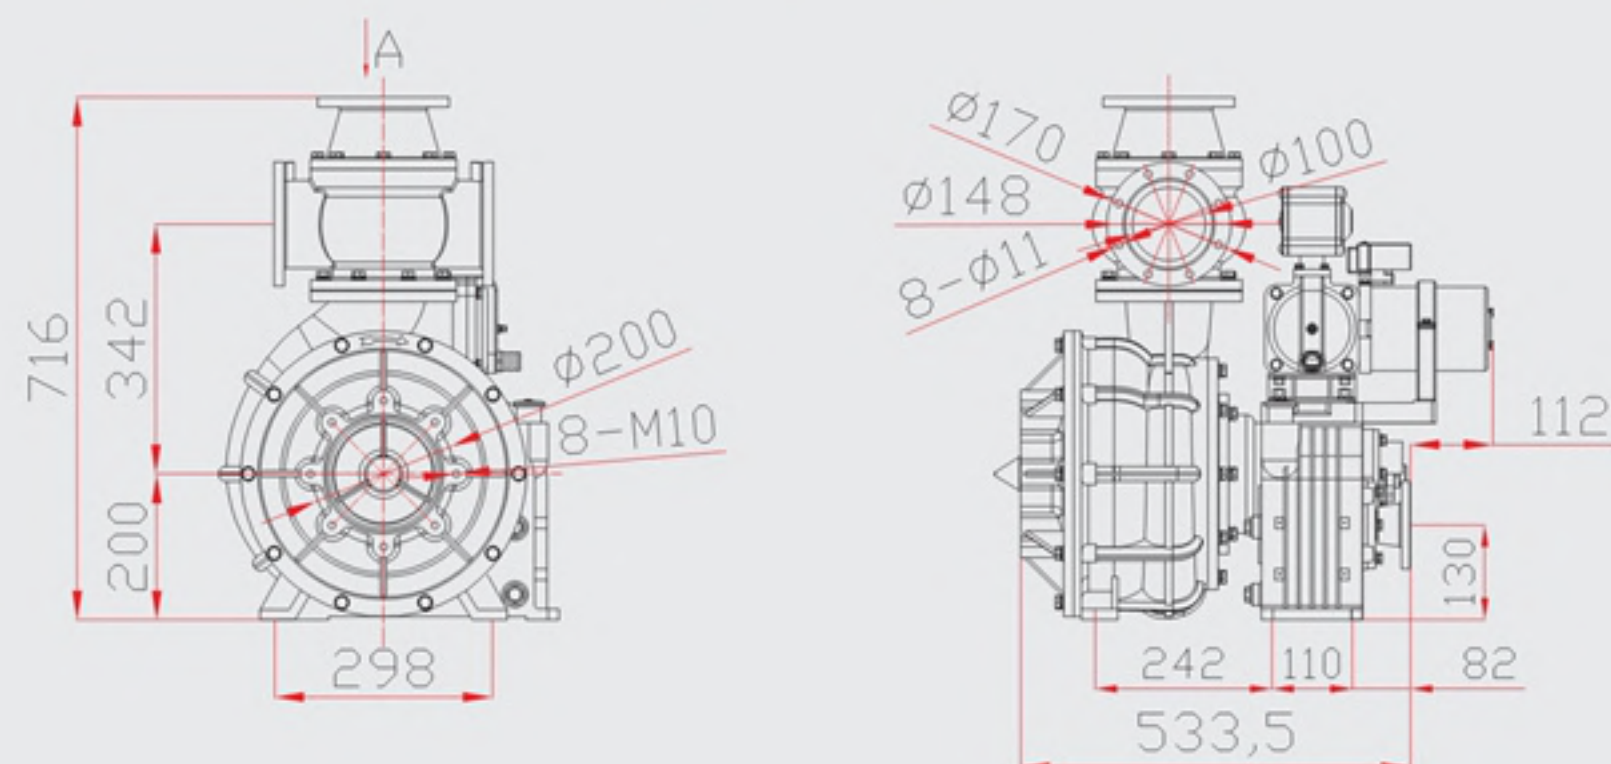

安装尺寸 / Installation dimension

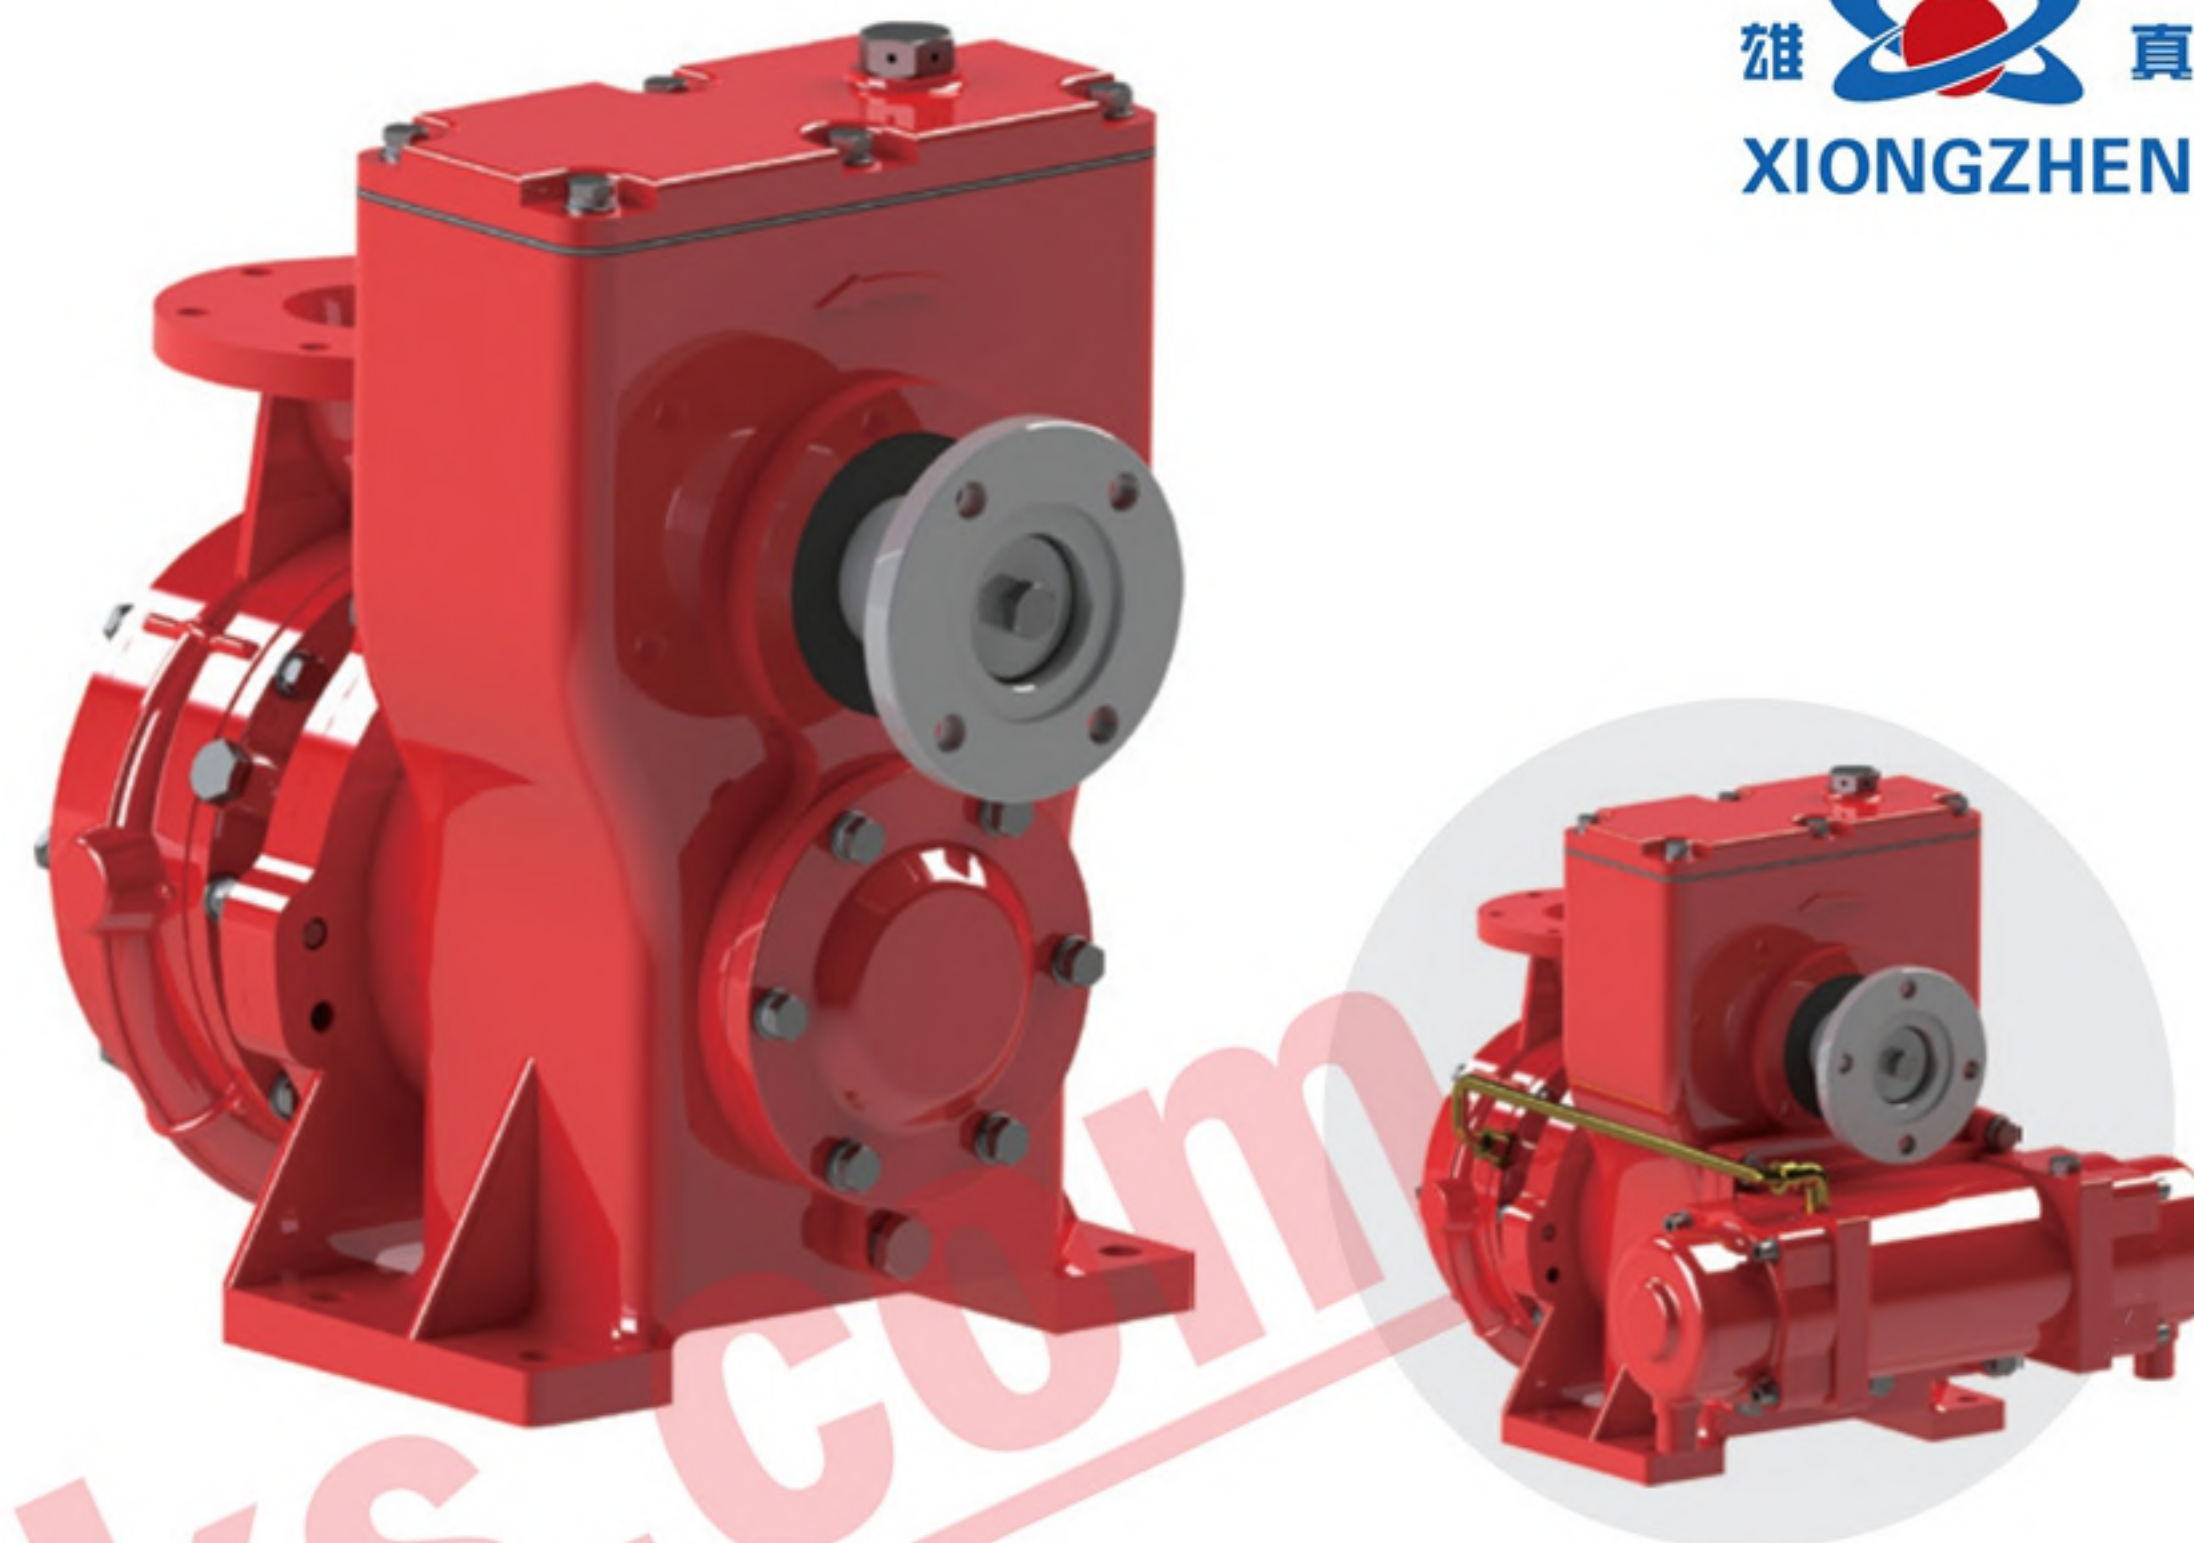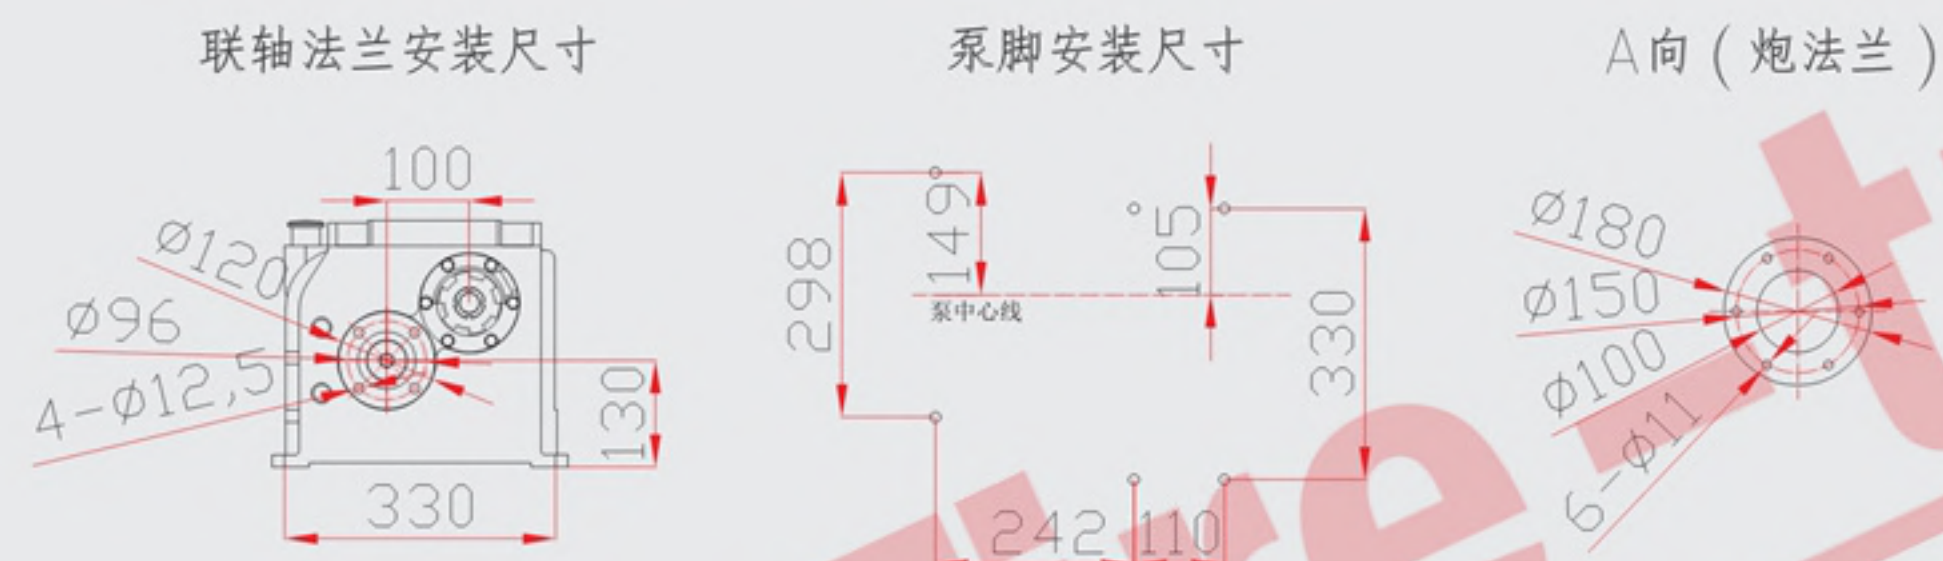

车用水泵

Vehicle pump

车用消防泵结构采用单级离心水泵，水泵壳体使用304不锈钢材料。性能与CB10/20-XZ相同，可在洒水车、消防车上使用。产品具有运行稳定、结构紧凑、操作方便、性能可靠的特点。产品通过国家3C认证，经国家消防装备质量监督检验中心检验。

齿轮箱可选择速比：3、2.23、1.47等。

The vehicle fire pump structure adopts a single-stage centrifugal water pump, and the housing of the pump is made of 304 stainless steel material. It performs the same as CB10/20-XZ, and can be used on sprinkler trucks and fire trucks. The product has the characteristics of stable operation, compact structure, convenient operation and reliable performance. The product has passed the Chinese 3C certification and has been inspected by the National Fire Equipment Quality Supervision and Inspection Center.

Optional speed ratios of the gearbox: 3, 2.23, 1.47, etc.


产品性能参数 / PRODUCT PERFORMANCE PARAMETERS

工况 Working Condition	流量(L/S) Flow	出口压力(MPa) Outlet Pressure	额定转速(r/min) Rated RPM	轴功率(Kw) Axial Power	吸深(m) Suction Depth
1	20	1.00	3309±50	36	3
2	17	1.00	3275±50	32	3
3	15	1.00	3259±50	29	3


车用洒水泵 安装尺寸图

Vehicle sprinkler pump, installation dimension drawing

样式一 / Style one

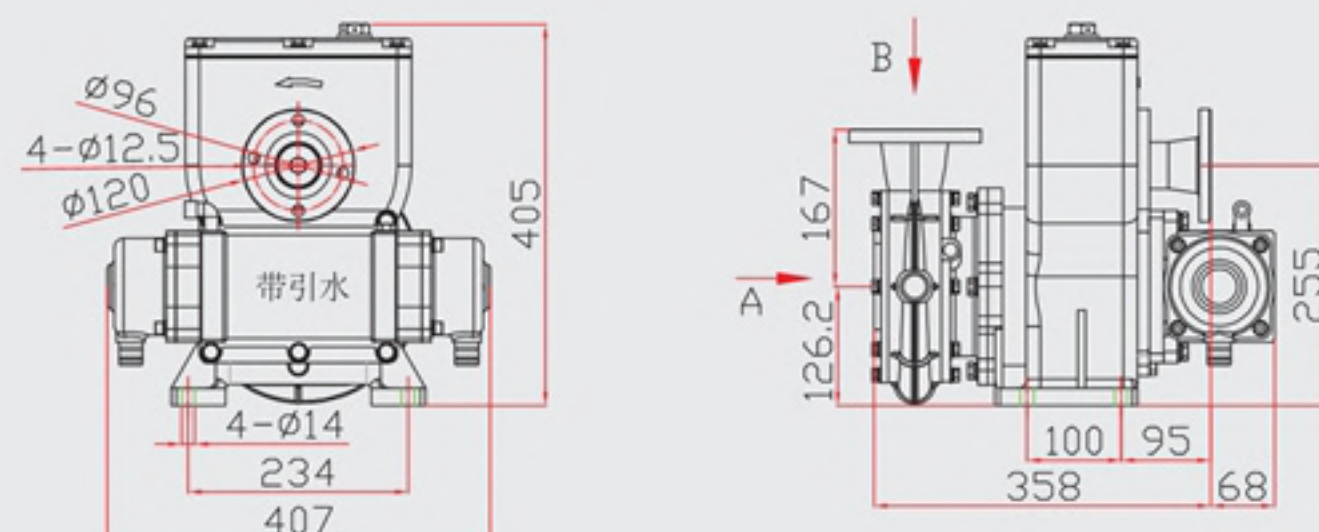

样式二 / Style two


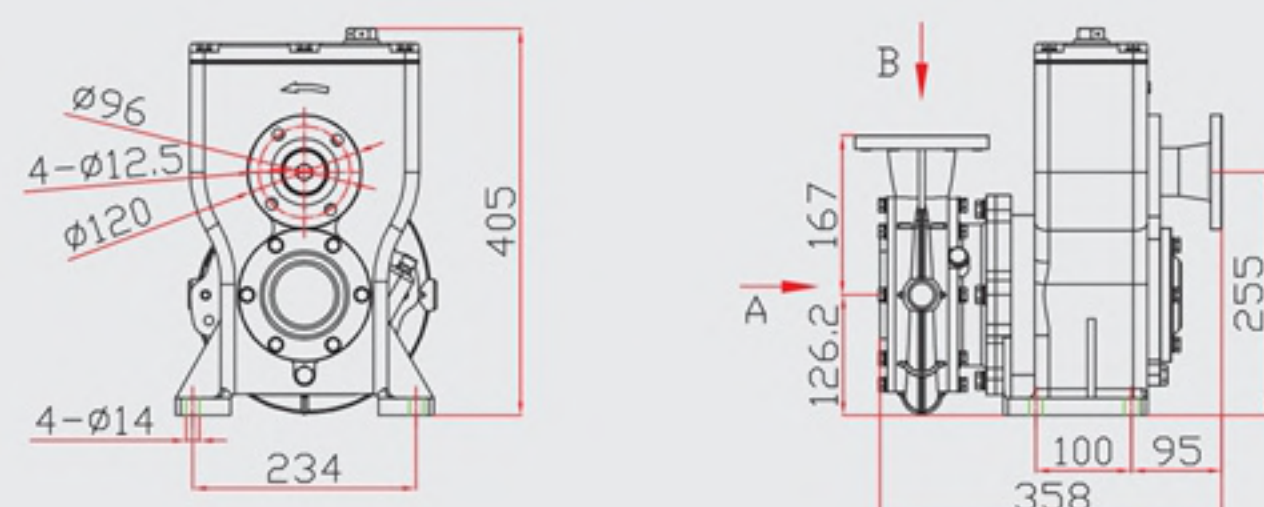


安装尺寸 / Installation dimension





两活塞引水器

Two-piston water diverter

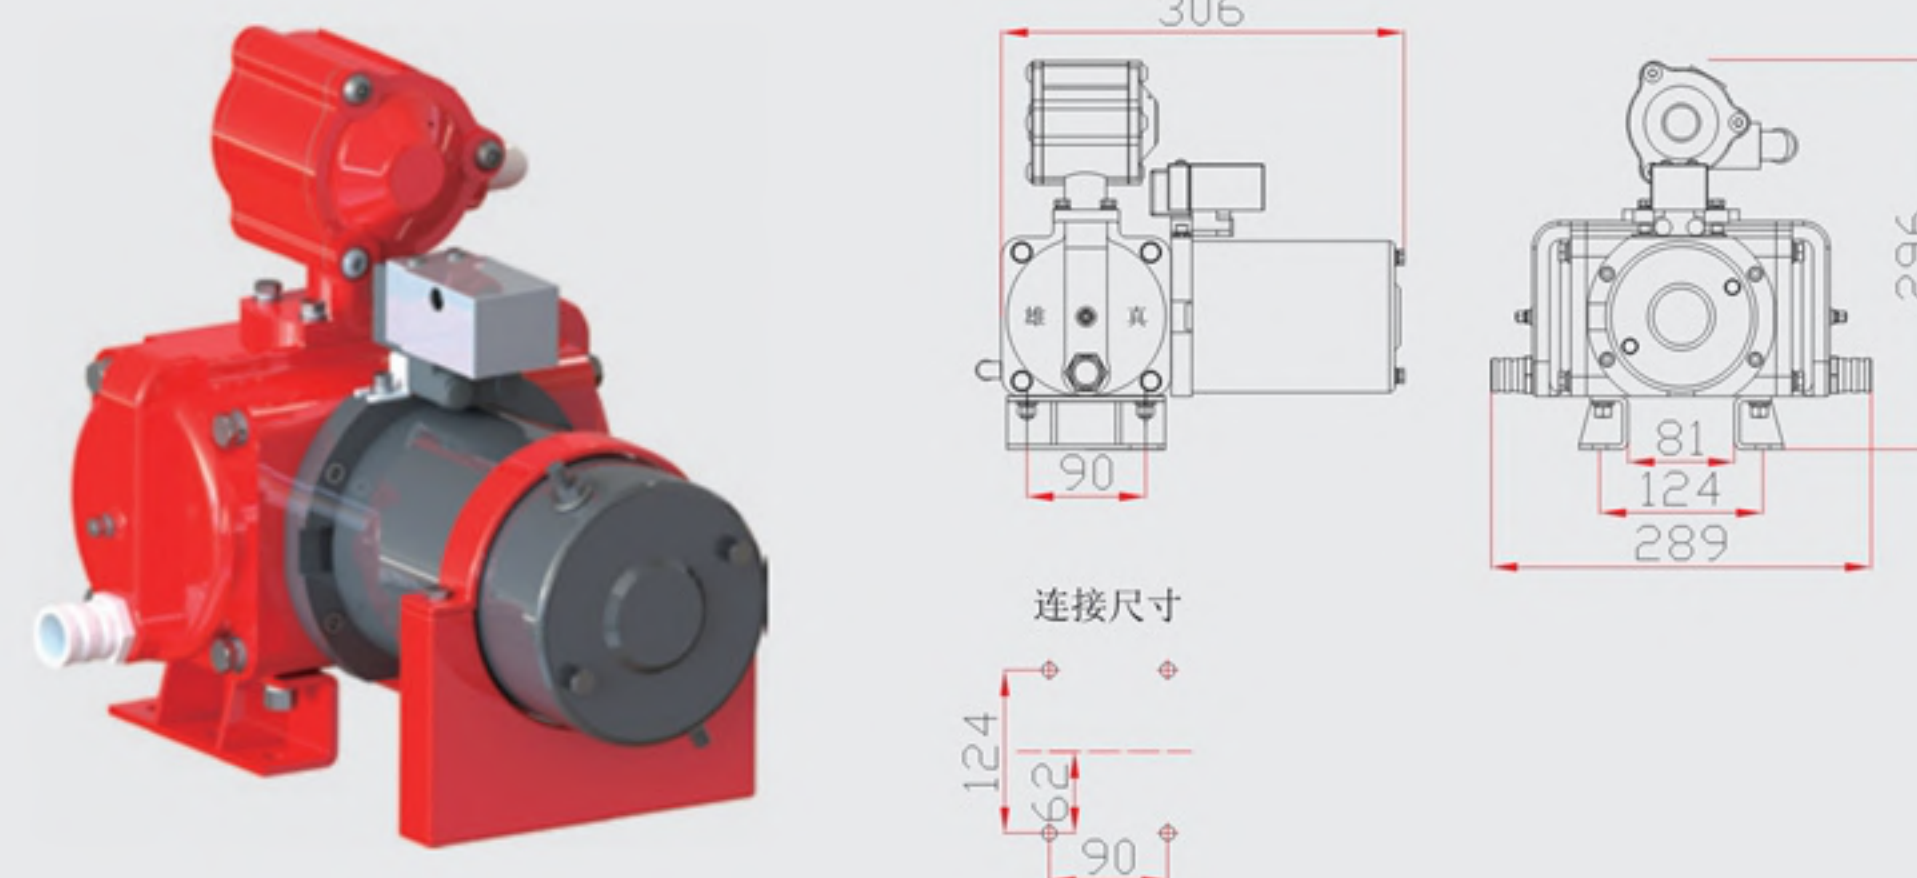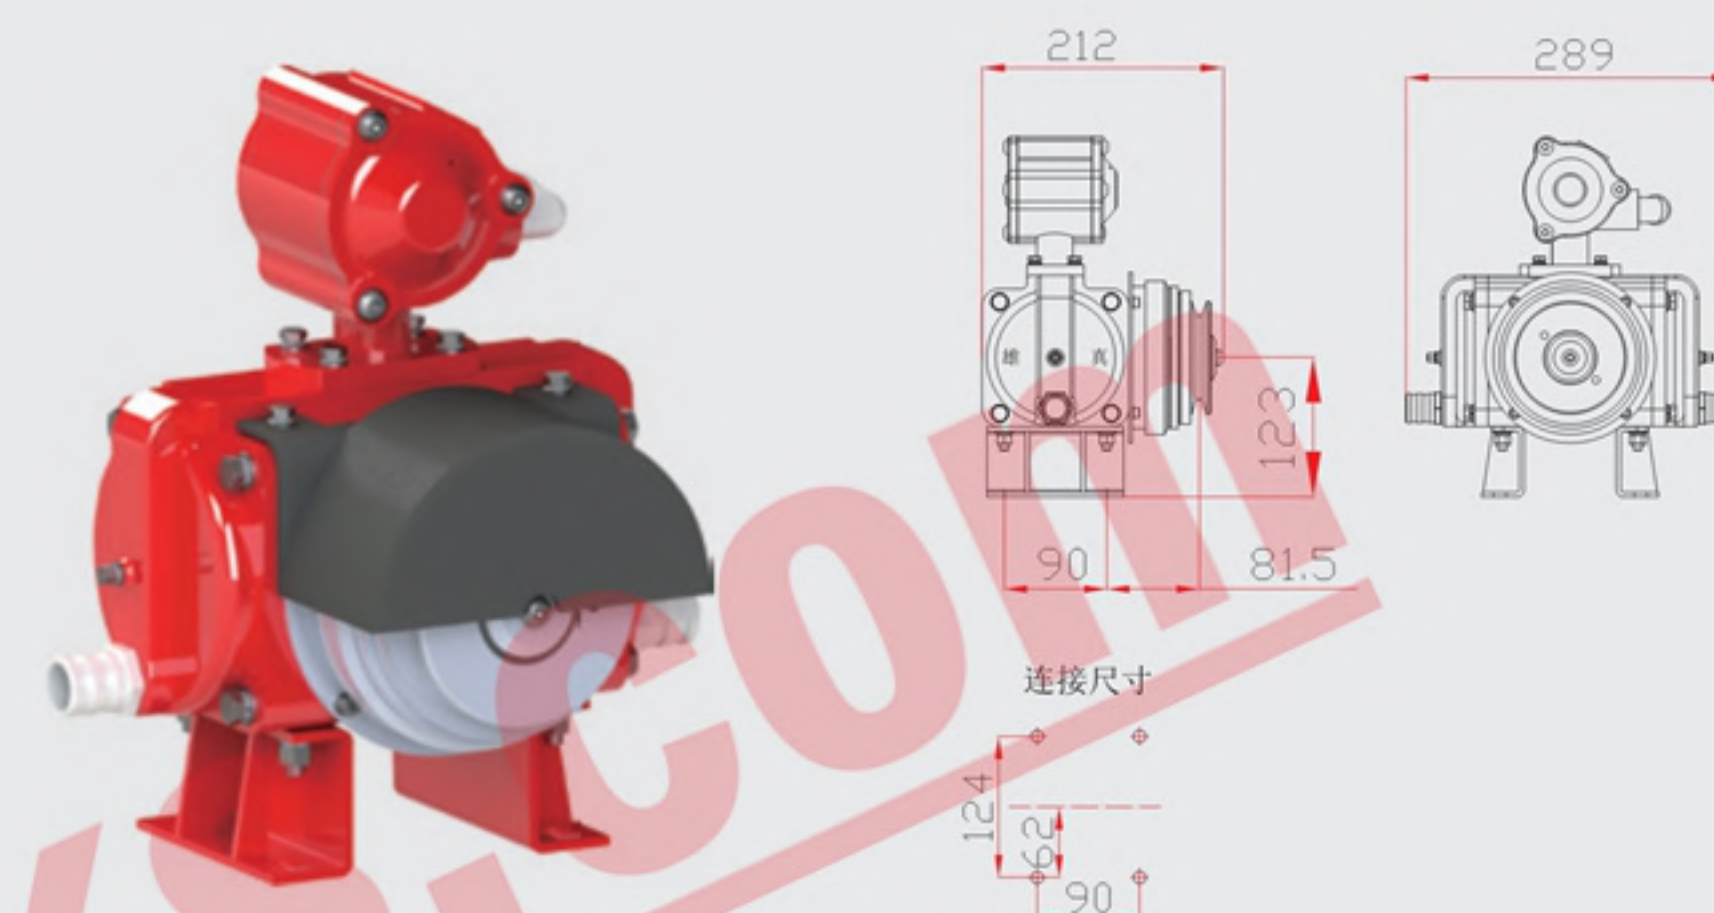

四活塞引水器

Four-piston water diverter

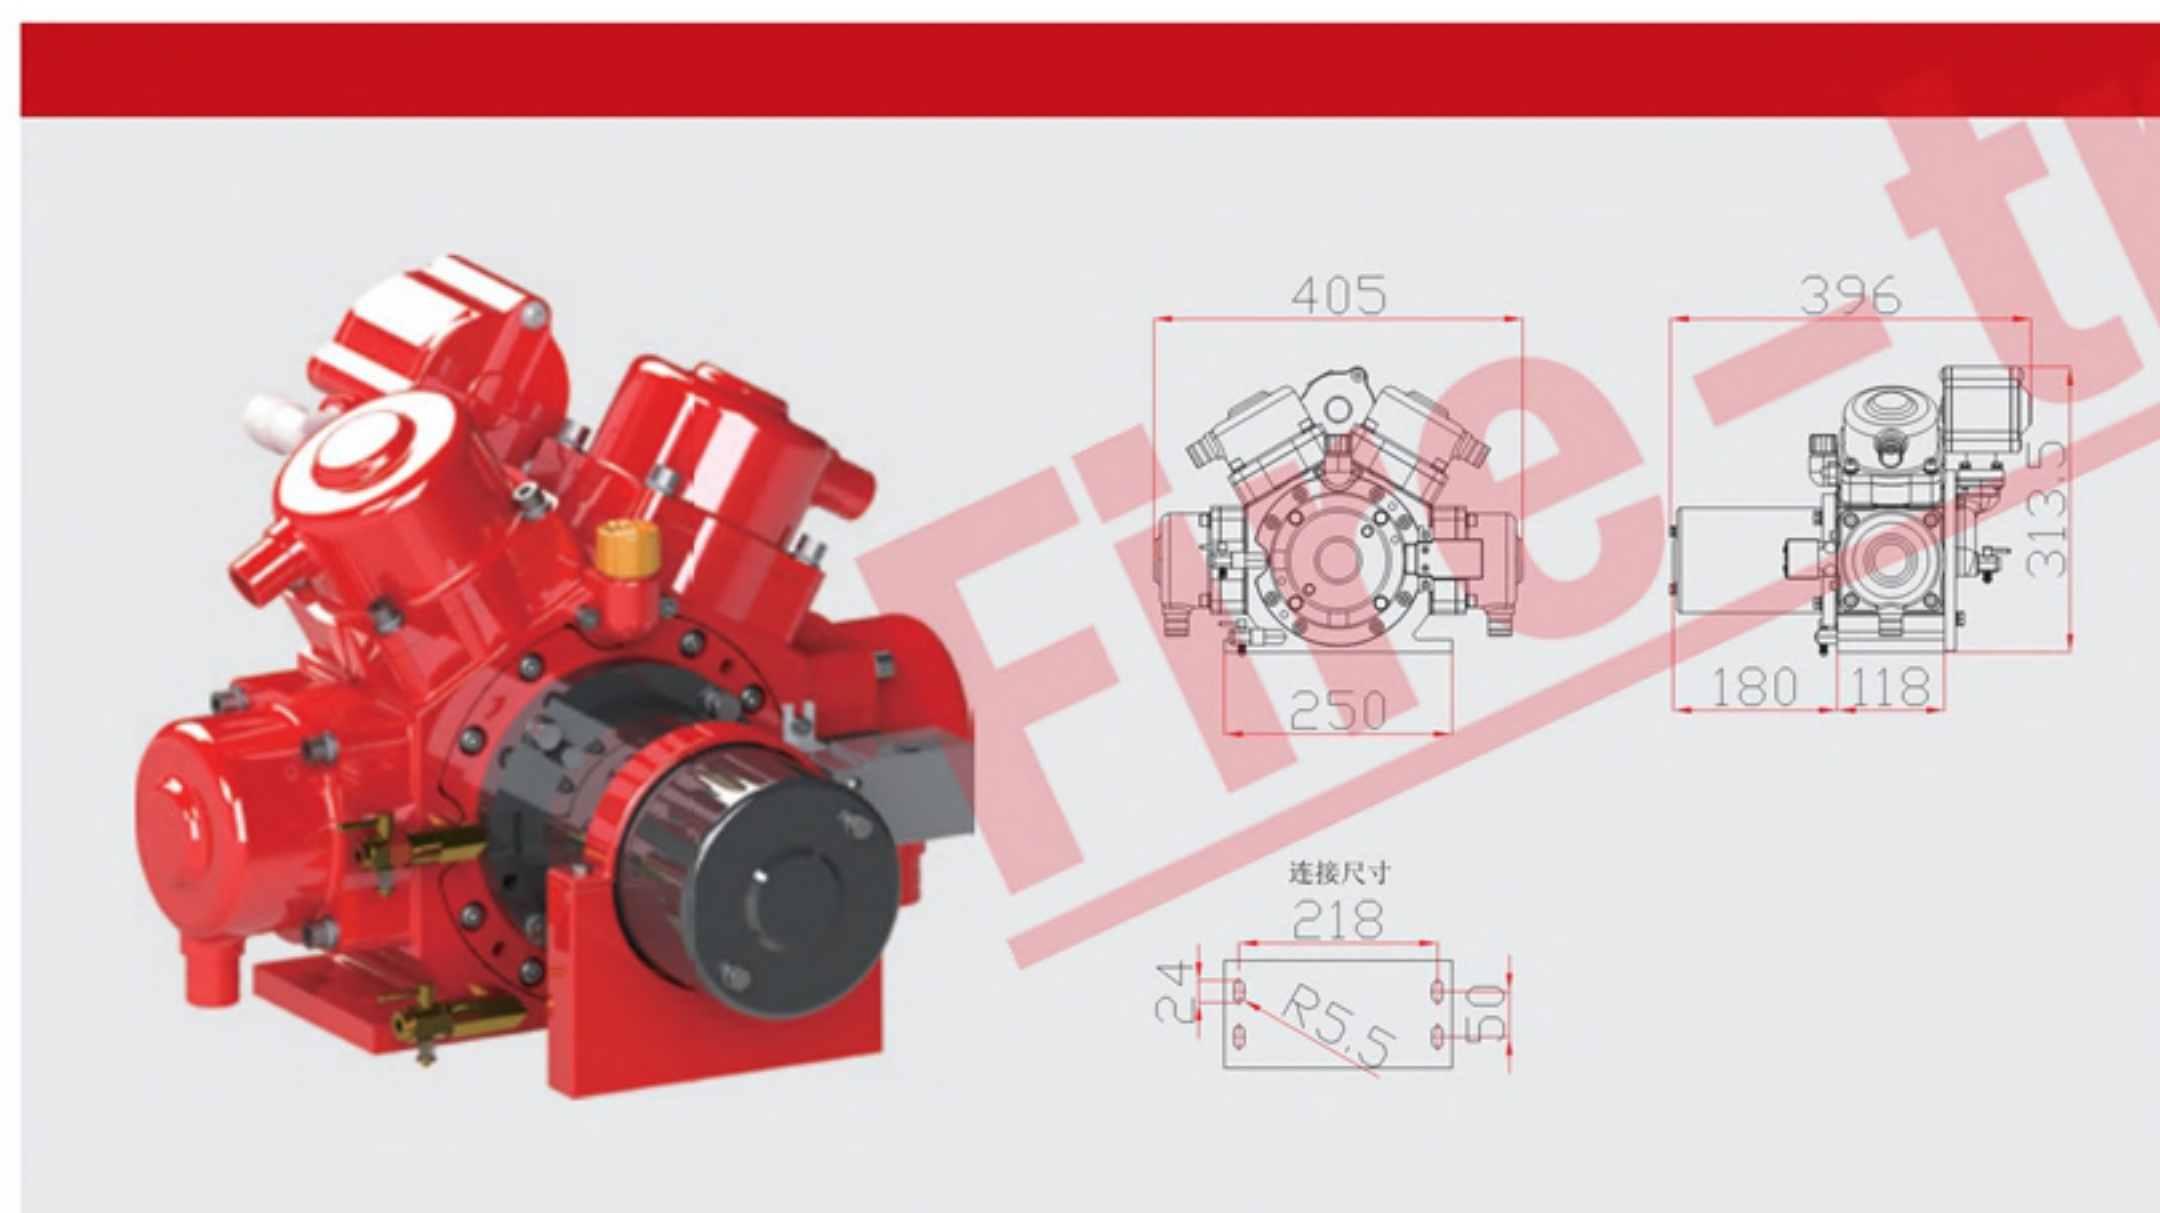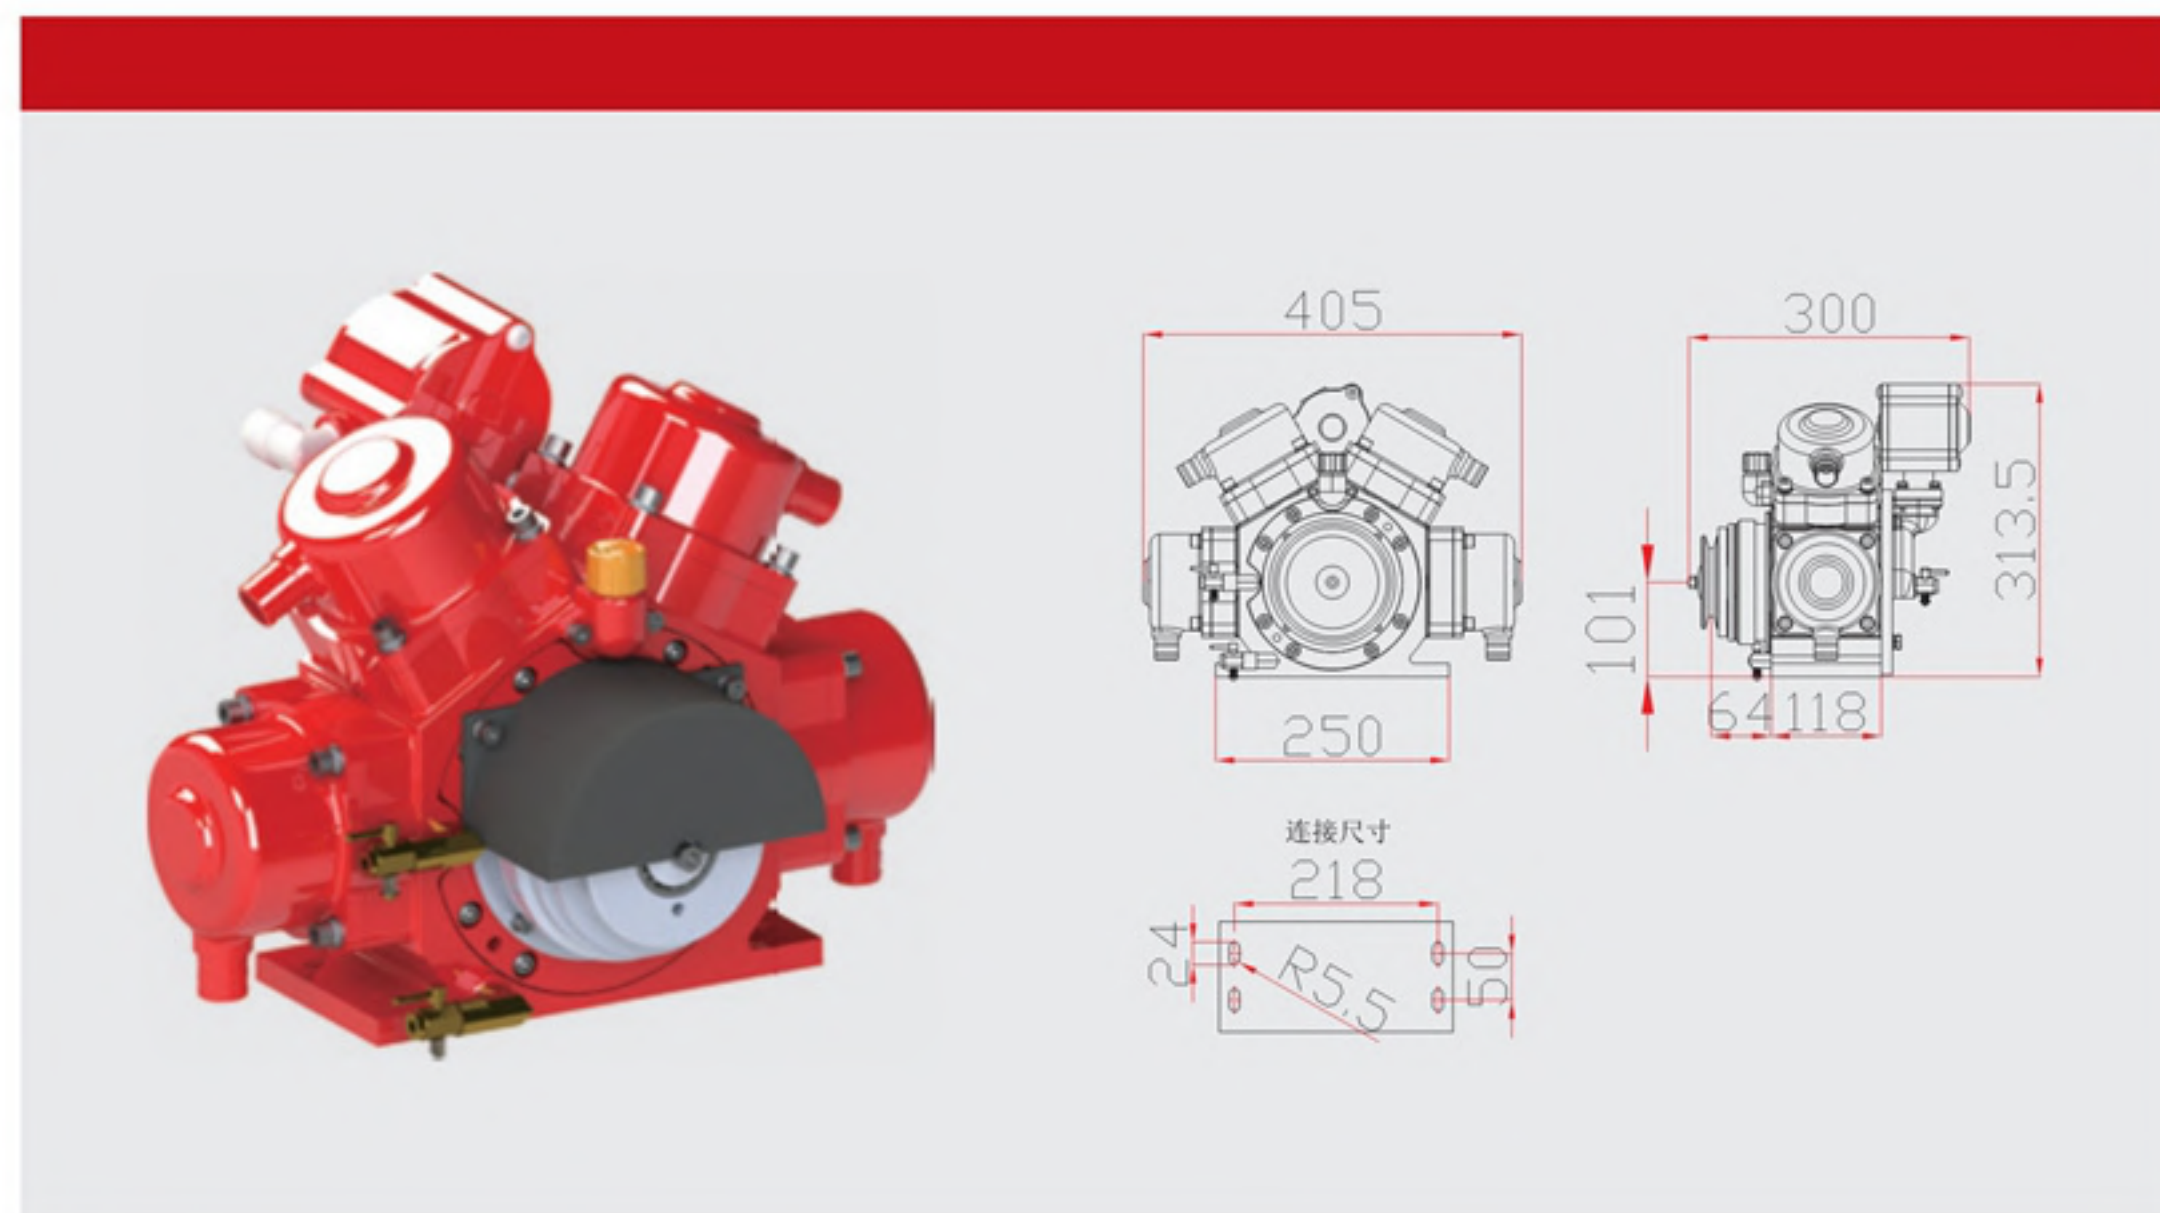


PH100泡沫比例混合器

PH100 foam proportioner




安装尺寸 / Installation dimension

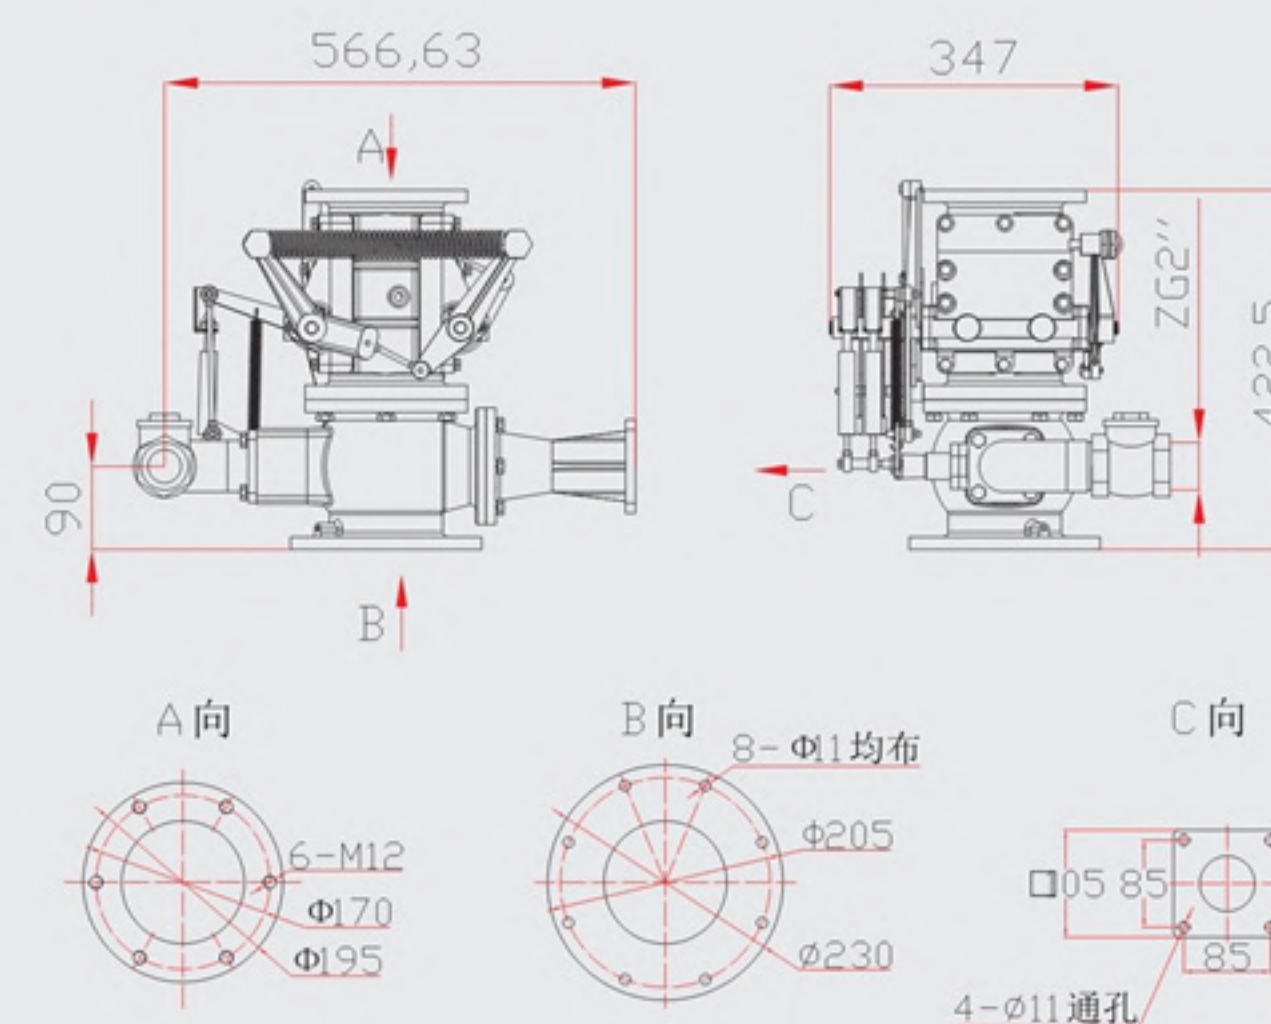

不锈钢球阀


Stainless steel ball valve

FQS65/2.5

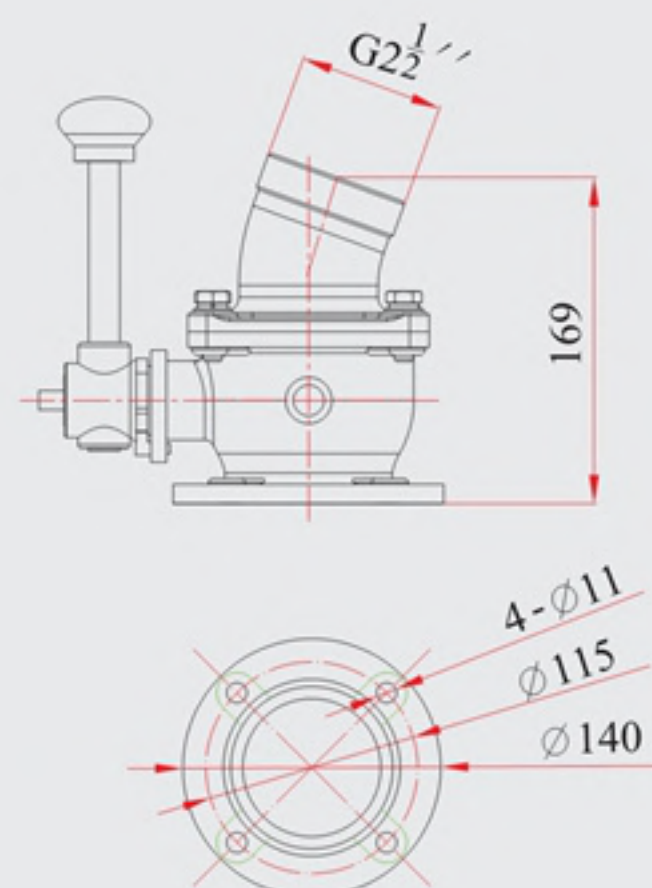

手柄可锁紧调整流量大小
The handle can be locked down and used to adjust the flow rate

FQS80/2.5

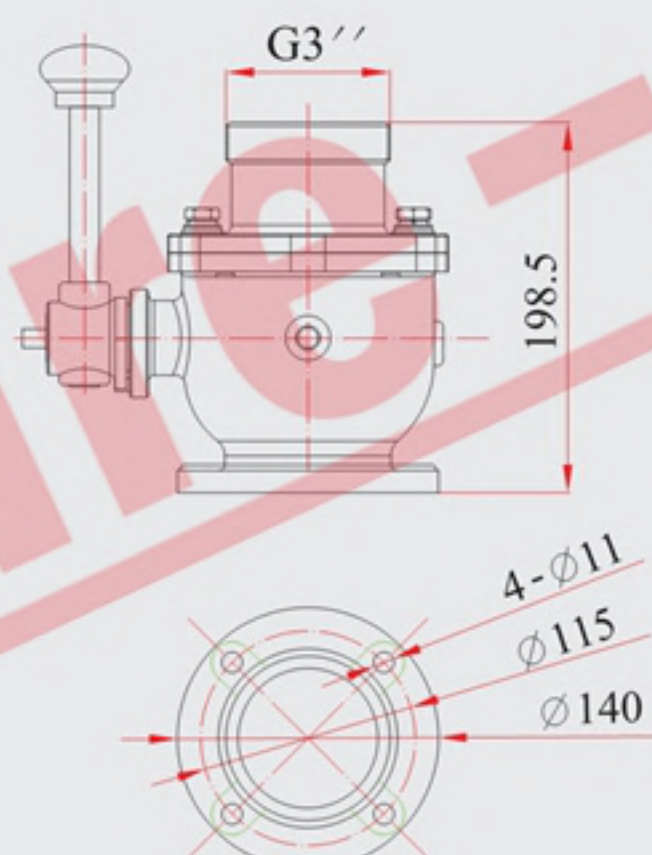


手柄可锁紧调整流量大小
The handle can be locked down and used to adjust the flow rate

产品介绍

Product description

消防炮 / Fire-fighting cannon

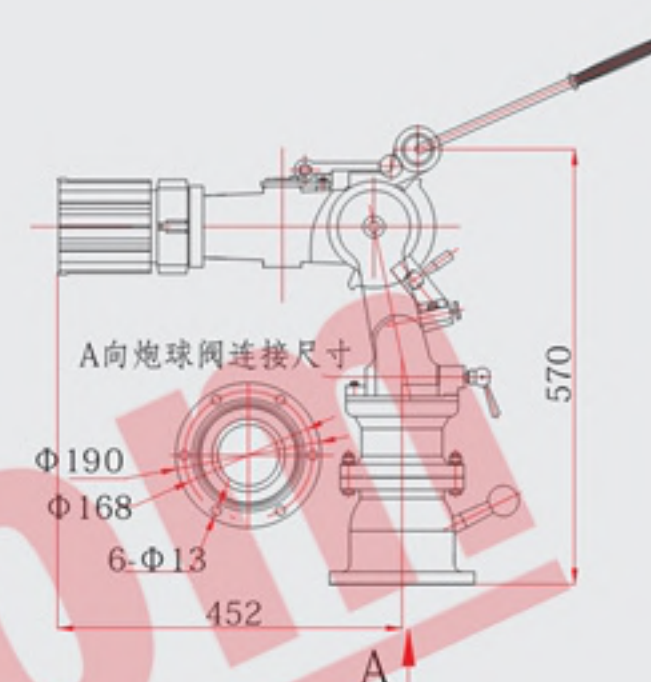

PI24-48 固定式消防炮
PI24-48 fixed fire-fighting cannon

消防水枪 / Fire hose



Q3中压、高压
Q3 medium pressure, high pressure



30米、40米中压（高压）卷盘
30m, 40m medium pressure (high pressure) reel



直流、喷雾、开花
DC, spray, scattering

配件 / Accessories



二活塞引水装置
Two-piston water diversion device





DN65 (DN80) 截止阀
DN65 (DN80) shut-off valve



PH48/PH64 环泵式比例混合器
PH48/PH64 ring pump type proportioner



四活塞引水装置
Four-piston water diversion device

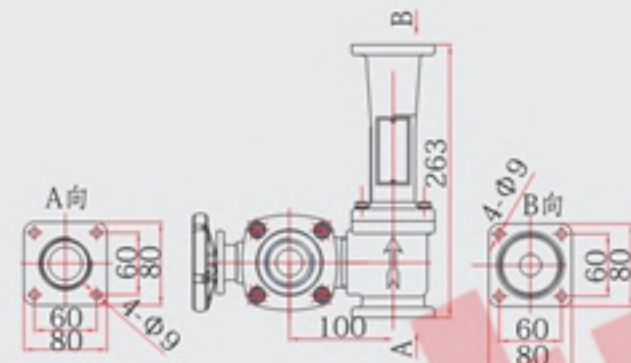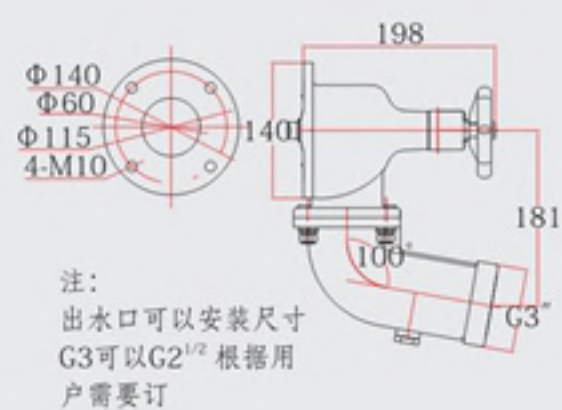

DN80止回阀
DN80 Check valve

DN100止回阀
DN100 Check valve

DN125止回阀
DN125 Check valve

DN150止回阀
DN150 Check valve

方法兰球阀 / Square flanged ball valve




FQS40/2.5


FQS50/2.5

FQS65/2.5


方法兰球阀安装尺寸图 / Installation dimension drawing of square flanged ball valve

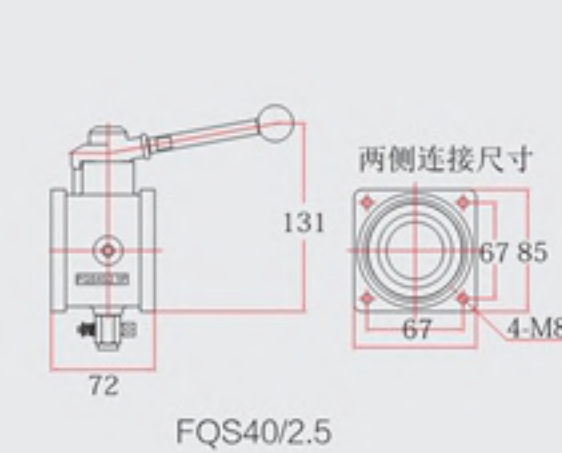

FQS40/2.5

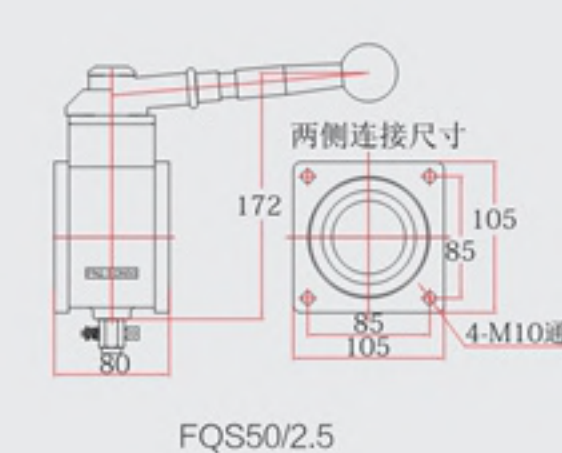


FQS50/2.5

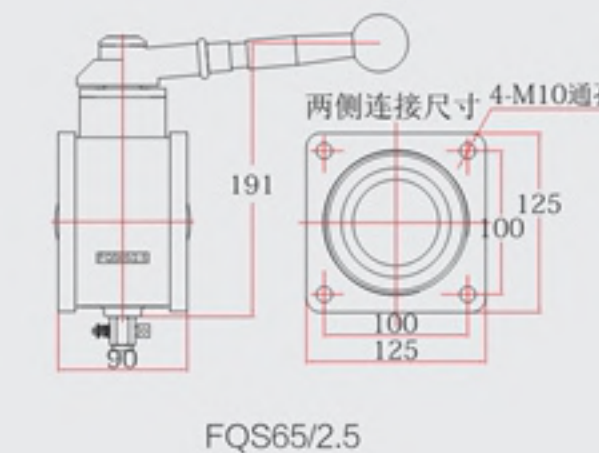

FQS65/2.5

出水球阀安装尺寸图 / Installation dimension drawing of discharge ball valve

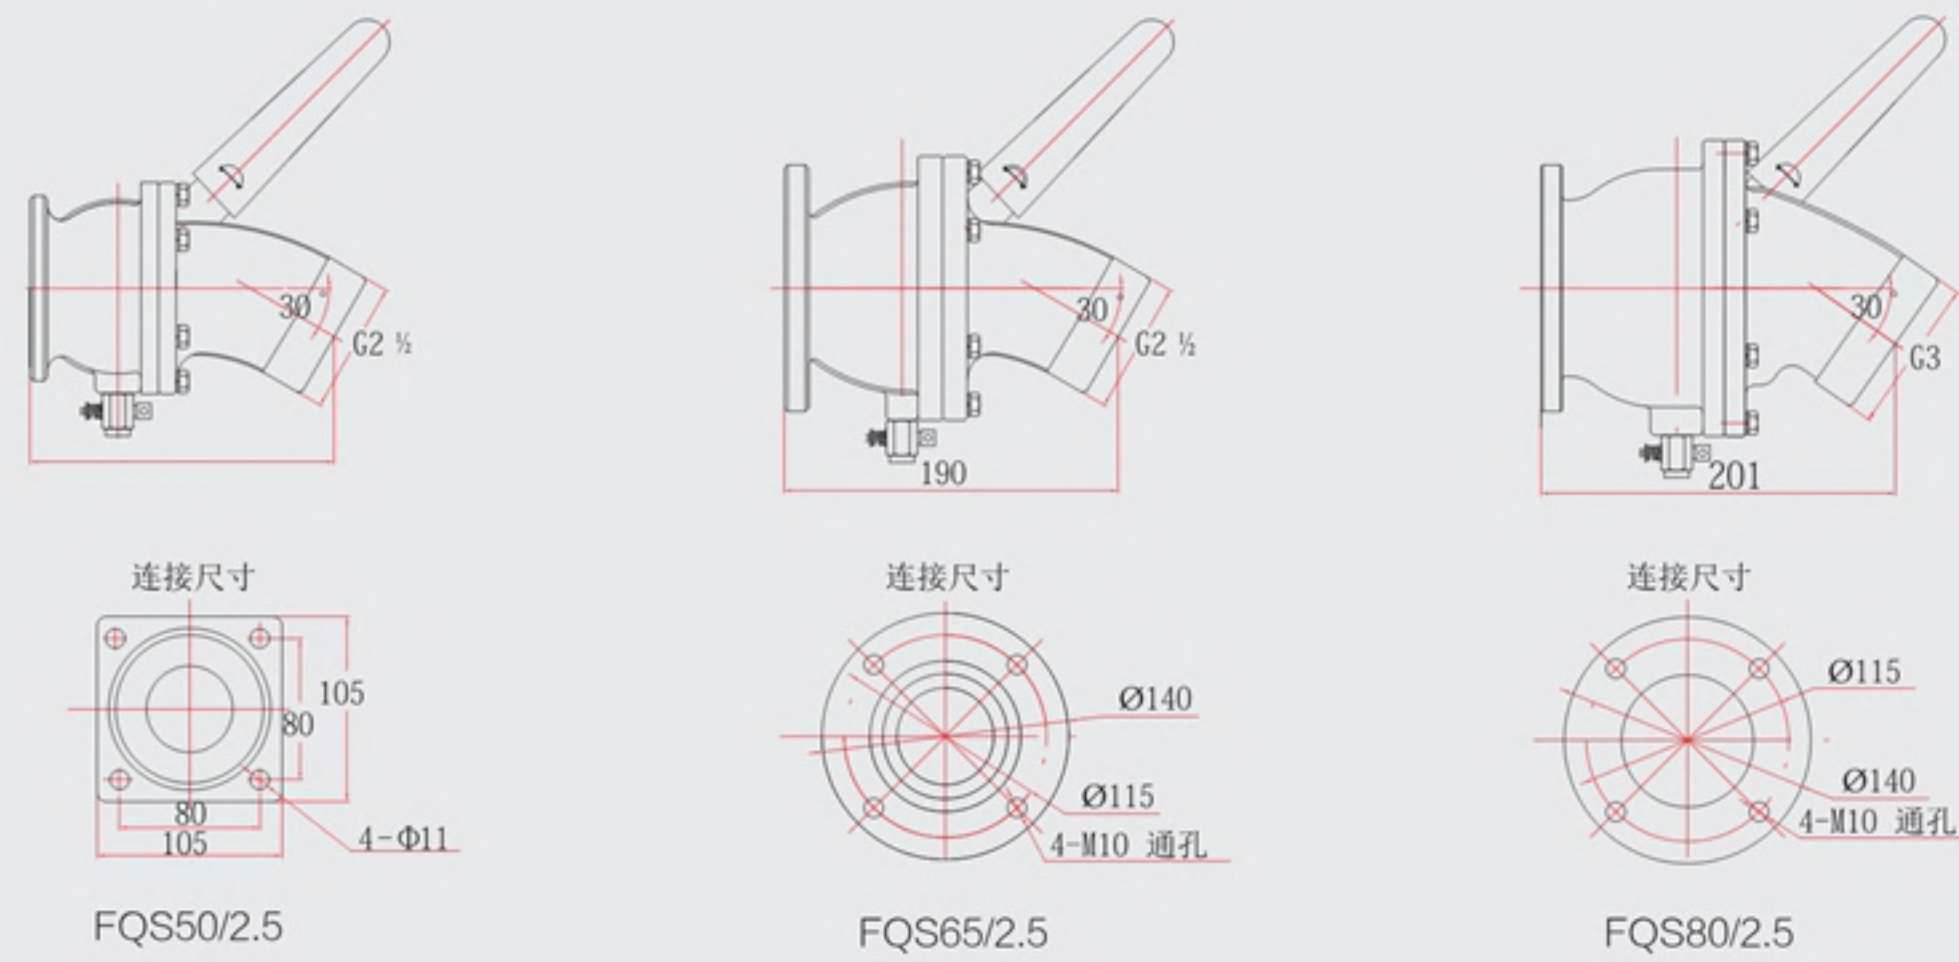

出水球阀 / Discharge ball valve

